

# **BALDOR® • RELIANCE**

## **Product Information Packet**

### **L1205-50**

**.33HP,2850RPM,1PH,50HZ,48,3416L,OPEN,F1**

Part Detail							
Revision:	AA	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3416L	Elec. Spec:	34WGW635	CD Diagram:	CD0001
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	34F001	Layout:	34LYF001
Frame:	48	Mounting:	F1	Poles:	02	Created Date:	
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	07-26-2016
Leads:	6#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1372L													
CAT.NO.	L1205-50												
SPEC.	34F01W635												
HP	.33												
VOLTS	110/220												
AMP	5.2/2.6												
RPM	2850 IP23												
FRAME	48					HZ	50			PH	1		
SER.F.	1.35					CODE	K		DES	N		CL	B
NEMA-NOM-EFF	64.9					PF	65						
RATING	40C AMB-CONT												
CC												USABLE AT 208V	
DE	6203					ODE	6203						
ENCL	OPEN					SN							
	SFA 5.6/2.8												

Parts List		
Part Number	Description	Quantity
SA007614	SA 34F01W635	1.000 EA
RA004001	RA 34F01W635	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
SP1006A01	TERM. BOARD, MODE 35 SW X H-23655	1.000 EA
34EP3210A01SP	FR ENDPLATE, MACH	1.000 EA
NS2500A01	INSULATOR, AUTO THER PROT	1.000 EA
WD1000A16	2-520128-2 AMP FLAG TERMINAL(4M/RL)	1.000 EA
34CB4800SP	CAPACITOR COVER, STAMPED PRIMED	1.000 EA
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3212A02	PU ENDPLATE, MODEL 34 OPEN	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
EC1189A02SP	61B2D120189NNBA ELEC CAP, 189-227MFD, 12	1.000 EA
SP5056A25	MODEL 34 TYPE L STATIONARY SWITCH WITH L	1.000 EA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 EA

<b>Parts List (continued)</b>		
<b>Part Number</b>	<b>Description</b>	<b>Quantity</b>
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
LB1451	WARNING LABEL, CE WARNING SYMBOLS ONLY	1.000 EA
NP1372L	ALUM UL CSA CE CC	1.000 EA
34PA1002	PKG GRP, PRINT PK1001A01	1.000 EA

**AC Induction Motor Performance Data**  
Record # 7039 - Typical performance - not guaranteed values


<b>Winding:</b> 34WGW635-R001	<b>Type:</b> 3416L	<b>Enclosure:</b> OPEN
-------------------------------	--------------------	------------------------


Nameplate Data				220 V, 50 Hz: High Voltage Connection	
Rated Output (HP)	.33			Full Load Torque	0.6 LB-FT
Volts	110/220			Start Configuration	direct on line
Full Load Amps	5.2/2.6			Breakdown Torque	1.35 LB-FT
R.P.M.	2850			Pull-up Torque	1.1 LB-FT
Hz	50	Phase	1	Locked-rotor Torque	1.6 LB-FT
NEMA Design Code	N	KVA Code	K	Starting Current	11 A
Service Factor (S.F.)	1.35			No-load Current	2.2 A
NEMA Nom. Eff.	64.9	Power Factor	65	Line-line Res. @ 25°C	5.88 Ω A Ph 5.4 Ω B Ph
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	21°C
S.F. Amps	5.6/2.8			Temp. Rise @ S.F. Load	28°C

Load Characteristics 220 V, 50 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	47	57	65	72	77	0
Efficiency	35.9	51.5	59.5	63.8	65.8	66.3	0
Speed	2966	2943	2918	2890	2859	2825	0
Line amperes	2.25	2.35	2.5	2.7	2.95	3.25	3.05

Performance Graph at 220V, 50Hz, 0.33HP Typical performance - Not guaranteed values

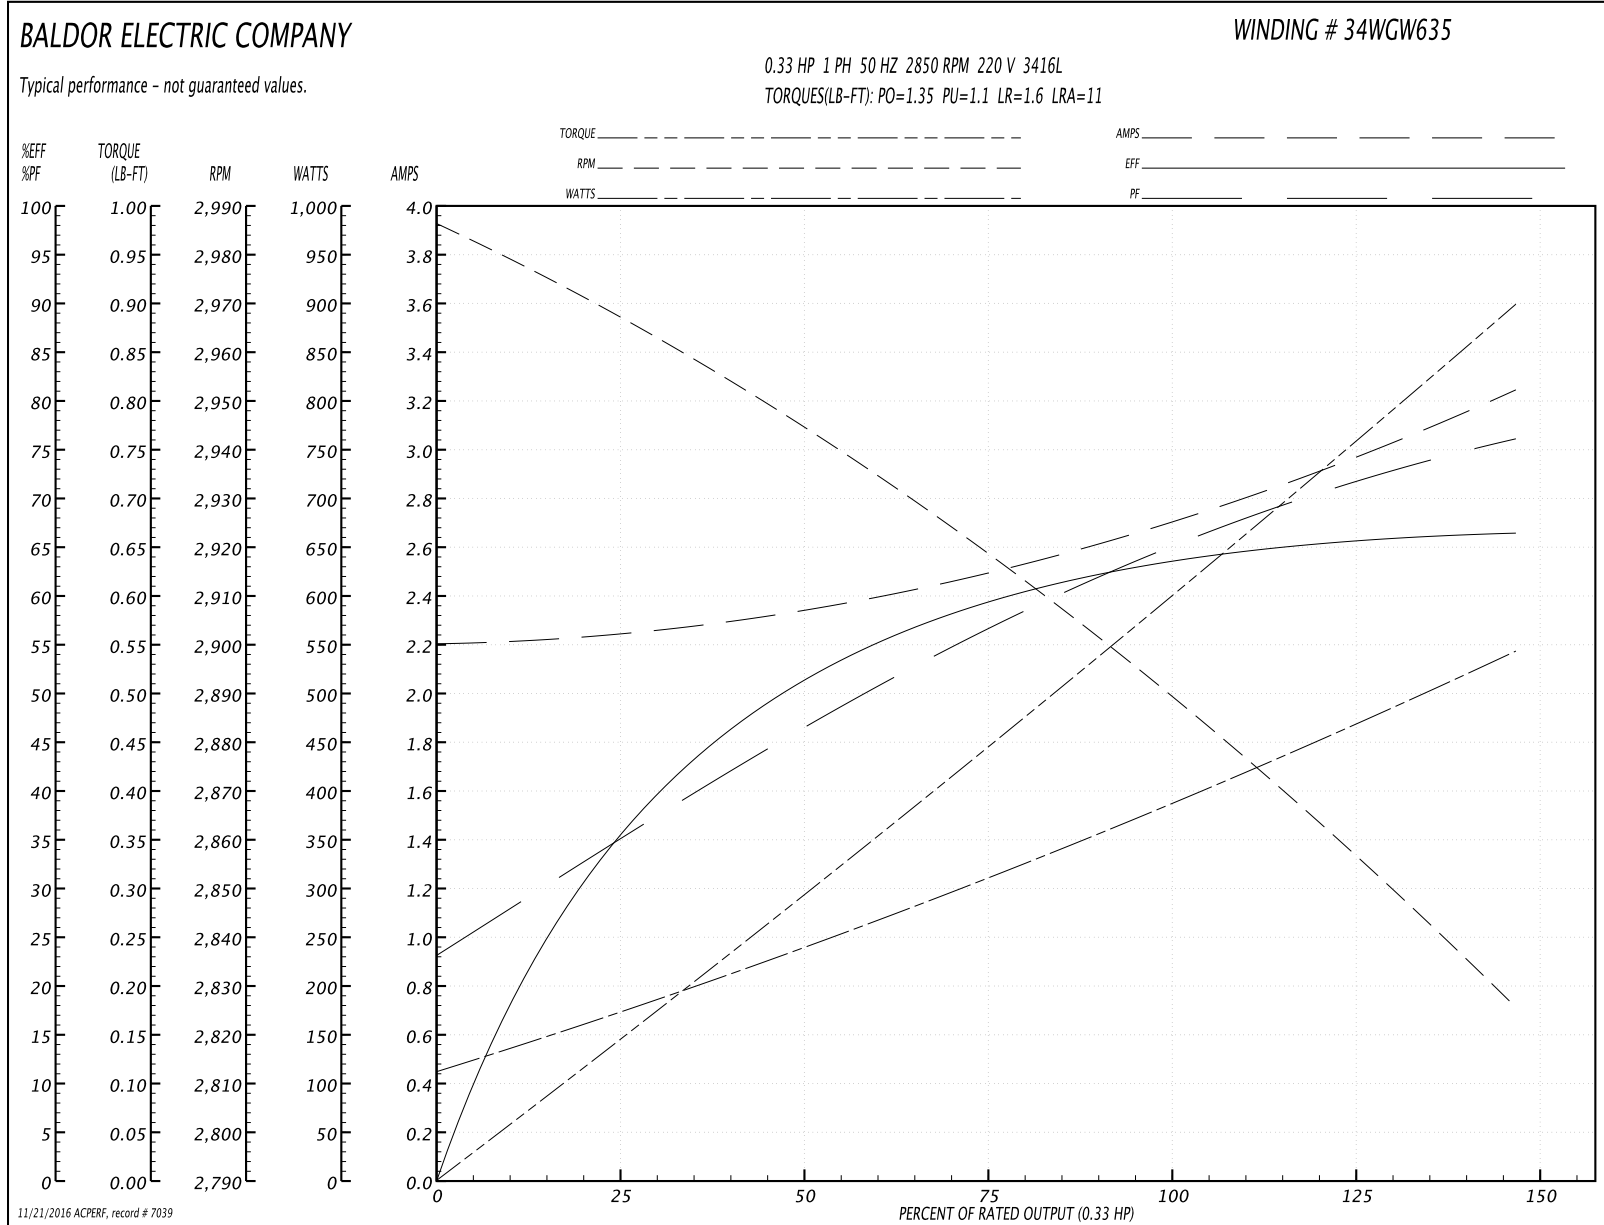

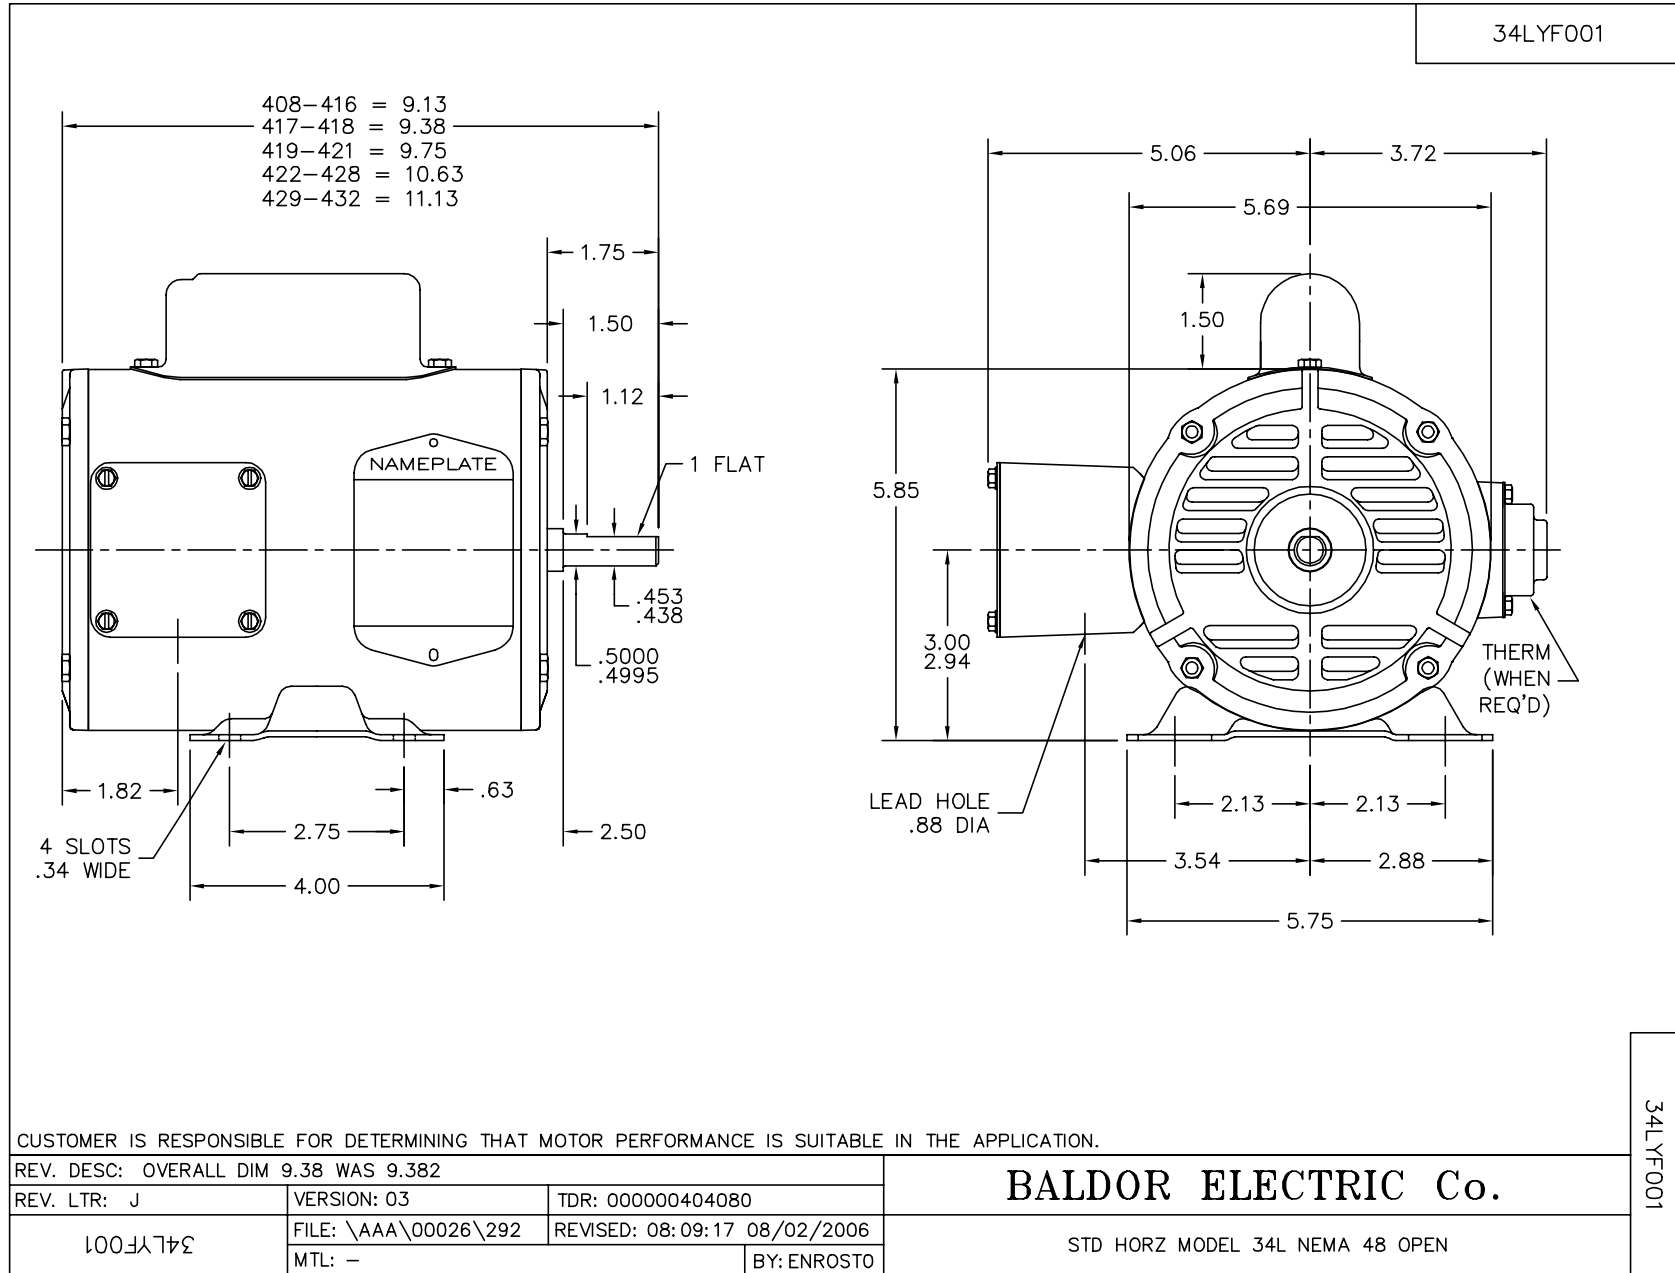

CD0001



CD0001

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
100000		FILE: AAA00007405	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE L, DV, REV, 6 LEADS