




CLASSIC SERIES SINGLE HEAD FIXED SPECIFICATIONS

STENNER PUMPS®

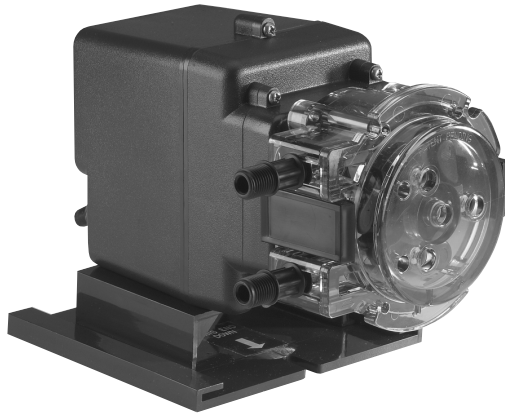


Shipping Weight 8 lbs (3.4 kg)

METERING PUMP



METERING PUMP
LR79585



Intertek
94247

**CONFORMS TO
ANSI/NSF STD. 50**

Equipment for swimming pools,
spas, hot tubs and other
recreational water facilities.

USE ONLY WITH ANSI/NSF 50
LISTED CONTROLLERS



THIS PUMP IS TESTED
AND CERTIFIED BY IAPMO
ACCORDING TO ANSI/NSF 61
FOR CONTACT WITH SODIUM
HYPOCHLORITE AND WATER
ONLY AND NSF/ANSI 372.

Listings vary by model

FEATURES

- Fixed flow rate output
- Self-priming, does not lose prime or vapor lock
- Pumps off-gassing solutions and can run dry
- 3-point roller design assists with anti-siphon
- Tube replacement without tools
- Output reproducibility
- Tube lubrication not required
- Foot valve not required to prime
- Output volume not affected by back pressure
- Tubes and pump heads interchangeable between models
- Installation accessories included

CLASSIC SERIES SINGLE HEAD FIXED SPECIFICATIONS

STENNER PUMPS®

SPECIFICATIONS

Flow Rate Output Control Fixed output
Reproducibility ±2%
Maximum Working Pressure
 25 psi (1.7 bar), 100 psi (6.9 bar)
Maximum Operating Temperature 125°F (52°C)
Maximum Suction Lift
 25 ft (7.6 m) vertical lift, based on water
Motor Type 1/30 HP, shaded pole, class B
Shaft RPM (average maximum) 26 or 44
Duty Cycle Continuous
Motor Voltage (Amp Draw)
 120V 60Hz 1PH (1.7)
 220V 60Hz 1PH (0.9)
 230V 50Hz 1PH (0.9)
 250V 50Hz 1PH (0.9)
Power Cord Type
 120V 60Hz, 220V 60Hz: SJTOW
 230V 50Hz, 250V 50Hz: H05VV-F
Power Cord Plug End
 120V 60Hz NEMA 5-15P
 220V 60Hz NEMA 6-15P
 230V 50Hz CEE CEE7/7
 250V 50Hz CEE CEE7/7

MATERIALS OF CONSTRUCTION

All Housings Polycarbonate
Pump Tube
 Santoprene** (FDA approved) or Versilon***
Check Valve Duckbill
 Santoprene** (FDA approved) or Pellethane†
Pump Head Rollers Polyethylene
Roller Bushings Oil impregnated bronze
Suction/Discharge Tubing, Ferrules
 Polyethylene (FDA approved)
Tube and Injection Fittings
 PVC or Polypropylene (both NSF listed)
Connecting Nuts
 PVC or Polypropylene (both NSF listed)
3/8" Adapter
 PVC or Polypropylene (both NSF listed)
Suction Line Strainer and Cap
 PVC or Polypropylene (both NSF listed);
 ceramic weight
All Fasteners Stainless steel
Pump Head Latches Polypropylene

ACCESSORIES

3 Connecting nuts 1/4" or 3/8"
3 Ferrules 1/4" or 6 mm **EUROPE**
1 Injection check valve 100 psi (6.9 bar) max.
 OR **1** Injection fitting 25 psi (1.7 bar) max.
1 Weighted suction line strainer
 1/4", 3/8" or 6 mm **EUROPE**
1 20' Roll suction/discharge tubing
 1/4" or 3/8", white or UV black
 OR 6 mm White **EUROPE**
1 Additional pump tube
2 Additional latches
1 Mounting bracket
1 Quick Start Manual

* Santoprene® is a registered trademark of Celanese International Corporation.

** Versilon® is a registered trademark of Saint-Gobain Performance Plastics.

† Pellethane® is a registered trademark of Lubrizol Advanced Materials, Inc.

FLOW RATE OUTPUT CHART

Single Head Fixed - Flow Rate Output Chart 25 psi (1.7 bar) maximum

	Model	Item Number Prefix	Pump Tube	Gallons per Day	Gallons per Hour	Ounces per Minute	Liters per Day	Liters per Hour	Milliliters per Minute	Liters per Day	Liters per Hour	Milliliters per Minute
45 SERIES	45MP1	45MFL1	1	3.0	0.13	0.27	11.4	0.48	7.92	9.1	0.38	6.32
	45MP2	45MFL2	2	10.0	0.42	0.89	37.9	1.58	26.32	30.3	1.26	21.04
	45MP3	45MFL3	3	22.0	0.92	1.96	83.3	3.47	57.85	66.6	2.78	46.25
	45MP4	45MFL4	4	35.0	1.46	3.11	132.5	5.52	92.01	106.0	4.42	73.61
	45MP5	45MFL5	5	50.0	2.08	4.44	189.3	7.89	131.43	151.4	6.31	105.14
85 SERIES	85MP1	85MFL1	1	5.0	0.21	0.44	18.9	0.79	13.13	15.1	0.63	10.49
	85MP2	85MFL2	2	17.0	0.71	1.51	64.4	2.68	44.65	51.5	2.15	35.76
	85MP3	85MFL3	3	40.0	1.67	3.55	151.4	6.31	105.14	121.1	5.05	84.10
	85MP4	85MFL4	4	60.0	2.50	5.33	227.1	9.46	157.71	181.7	7.57	126.18
	85MP5	85MFL5	5	85.0	3.54	7.55	321.8	13.40	223.40	257.4	10.73	178.75
Approximate Output @ 60Hz										Approximate Output @ 50Hz		

Single Head Fixed - Flow Rate Output Chart 100 psi (6.9 bar) maximum

	Model	Item Number Prefix	Pump Tube	Gallons per Day	Gallons per Hour	Ounces per Minute	Liters per Day	Liters per Hour	Milliliters per Minute	Liters per Day	Liters per Hour	Milliliters per Minute
45 SERIES	45MPHP2	45MFH1	1	3.0	0.13	0.27	11.4	0.48	7.92	9.1	0.38	6.32
	45MPHP10	45MFH2	2	10.0	0.42	0.89	37.9	1.58	26.32	30.3	1.26	21.04
	45MPHP22	45MFH7	7	22.0	0.92	1.96	83.3	3.47	57.85	66.6	2.78	46.25
85 SERIES	85MPHP5	85MFH1	1	5.0	0.21	0.44	18.9	0.79	13.13	15.1	0.63	10.49
	85MPHP17	85MFH2	2	17.0	0.71	1.51	64.4	2.68	44.65	51.5	2.15	35.76
	85MPHP40	85MFH7	7	40.0	1.67	3.55	151.4	6.31	105.14	121.1	5.05	84.10
Approximate Output @ 60Hz										Approximate Output @ 50Hz		

* Injection check valve included with pumps rated 100 psi (6.9 bar) maximum.

NOTICE: The information within this chart is solely intended for use as a guide. The output data is an approximation based on pumping water under a controlled testing environment. Many variables can affect the output of the pump. Stenner Pump Company recommends that all metering pumps undergo field calibration by means of analytical testing to confirm their outputs. The information contained in this flyer is not intended for specific application purposes. Stenner Pump Company reserves the right to make changes to prices, products, and specifications at any time without prior notice.