

BALDOR® • *RELIANCE*

Product Information Packet

EBM3554Y

1.5HP, 1760RPM, 3PH, 60HZ, 56, 3526M, TEFC, F1

| Part Detail | | | | | | | |
|-------------|------|----------------|-------|-------------|----------|---------------|------------|
| Revision: | G | Status: | PRD/A | Change #: | | Proprietary: | No |
| Type: | AC | Prod. Type: | 3526M | Elec. Spec: | 35WGM493 | CD Diagram: | CD0005 |
| Enclosure: | TEFC | Mfg Plant: | | Mech. Spec: | 35A022 | Layout: | 35LYA022 |
| Frame: | 56 | Mounting: | F1 | Poles: | 04 | Created Date: | 03-06-2015 |
| Base: | RG | Rotation: | R | Insulation: | B | Eff. Date: | 06-27-2016 |
| Leads: | 9#18 | | | | | Replaced By: | |
| Literature: | | Elec. Diagram: | | | | | |

| Nameplate NP1259L | | | | | | | | | | | | |
|-------------------|--------------|--|--|--|--|------|------|--|----------------|-----|----|---|
| CAT.NO. | EBM3554Y | | | | | | | | | | | |
| SPEC. | 35A022M493G2 | | | | | | | | | | | |
| HP | 1.5 | | | | | | | | | | | |
| VOLTS | 230/460 | | | | | | | | | | | |
| AMP | 4.4/2.2 | | | | | | | | | | | |
| RPM | 1760 | | | | | | | | | | | |
| FRAME | 56 | | | | | HZ | 60 | | | PH | 3 | |
| SER.F. | 1.15 | | | | | CODE | L | | DES | B | CL | B |
| NEMA-NOM-EFF | 86.5 | | | | | PF | 73 | | | | | |
| RATING | 40C AMB-CONT | | | | | | | | | | | |
| CC | 010A | | | | | | | | USABLE AT 208V | 4.5 | | |
| DE | 6205 | | | | | ODE | 6203 | | | | | |
| ENCL | TEFC | | | | | SN | | | | | | |
| | | | | | | | | | | | | |

| Parts List | | |
|---------------|--|----------|
| Part Number | Description | Quantity |
| SA295115 | SA 35A022M493G2 | 1.000 EA |
| RA281184 | RA 35A022M493G2 | 1.000 EA |
| NS2512A01 | INSULATOR, CONDUIT BOX X | 1.000 EA |
| 35CB3007 | 35 CB CASTING W/.88 DIA. LEAD HOLE | 1.000 EA |
| 36GS1000 | GASKET-CONDUIT BOX, .06 THICK #SV-330 LE | 1.000 EA |
| 51XB1016A07 | 10-16 X 7/16 HXWSSLD SERTYB | 2.000 EA |
| 11XW1032G06 | 10-32 X .38, TAPTITE II, HEX WSHR SLTD U | 1.000 EA |
| 35EP3900T01 | SPL FACE MTD FR EP-ENCL-W/STEARNS BRAKE | 1.000 EA |
| HW5100A03SP | WAVY WASHER (W1543-017) | 1.000 EA |
| 35EP3101A04 | STL PU EP-ENCL-205 BRG- FAN ON PULLEY EN | 1.000 EA |
| XY1032A02 | 10-32 HEX NUT DIRECTIONAL SERRATION | 4.000 EA |
| HW2501D10 | KEY, 3/16 SQ X 1.000 | 1.000 EA |
| 51XB1214A16 | 12-14X1.00 HXWSSLD SERTYB | 1.000 EA |
| HW2500A16 | EY, USA #606, WOODRUFF | 1.000 EA |
| 35FH4005A08 | IEC FH NO GRSR W/1/12 SHAFT HOLE, W/ | 1.000 EA |
| 51XW1032A06 | 10-32 X .38, TAPTITE II, HEX WSHR SLTD S | 3.000 EA |
| 35CB4521GX | CONDUIT BOX LID KIT | 1.000 EA |
| 51XW0832A07 | 8-32 X .44, TAPTITE II, HEX WSHR SLTD SE | 4.000 EA |
| HW2501D13 | KEY, 3/16 SQ X 1.375 | 1.000 EA |
| HA7000A04 | KEY RETAINER 0.625 DIA SHAFTS | 1.000 EA |
| 85XU0407S04 | 4X1/4 U DRIVE PIN STAINLESS | 2.000 EA |
| MJ1000A02 | GREASE, POLYREX EM EXXON (USe 4824-15A) | 0.050 LB |
| 35FN3002A02SP | EXFN, PLASTIC, 6.376 OD, .987 ID W/KEY | 1.000 EA |
| 84XN3816J28 | HEX SOC HD, 3/8-16 X 1.75 LONG | 2.000 EA |

| Parts List (continued) | | |
|-------------------------------|--|-----------------|
| Part Number | Description | Quantity |
| MG1000Y03 | MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20, | 0.017 GA |
| HA3100A18 | THRUBOLT 10-32 X 9.250 | 4.000 EA |
| 76BK3100BQF | 1-056-031-00-BQF BRAKE TDR# 79345 | 1.000 EA |
| LC0005E01 | CONN.DIA./WARNING LABEL (LC0005/LB1119N) | 1.000 EA |
| LB1404 | BRAKE CONNECTION LABEL | 1.000 EA |
| NP1259L | ALUM SUPER-E UL CSA-EEV CC NEMA PREMIUM | 1.000 EA |
| 36PA1000 | PKG GRP, PRINT PK1016A06 | 1.000 EA |
| MN416A01 | TAG-INSTAL-MAINT no wire (1200/bx) 11/14 | 1.000 EA |

AC Induction Motor Performance Data

Record # 49590 - Typical performance - not guaranteed values


| | | |
|-------------------------------|--------------------|------------------------|
| Winding: 35WGM493-R068 | Type: 3526M | Enclosure: TEFC |
|-------------------------------|--------------------|------------------------|


| Nameplate Data | | | | 460 V, 60 Hz: High Voltage Connection | |
|-----------------------|--------------|--------------|----|--|--------------------------|
| Rated Output (HP) | 1.5 | | | Full Load Torque | 4.47 LB-FT |
| Volts | 230/460 | | | Start Configuration | direct on line |
| Full Load Amps | 4.4/2.2 | | | Breakdown Torque | 19.2 LB-FT |
| R.P.M. | 1760 | | | Pull-up Torque | 9.4 LB-FT |
| Hz | 60 | Phase | 3 | Locked-rotor Torque | 13.4 LB-FT |
| NEMA Design Code | B | KVA Code | L | Starting Current | 18.3 A |
| Service Factor (S.F.) | 1.15 | | | No-load Current | 1.37 A |
| NEMA Nom. Eff. | 86.5 | Power Factor | 73 | Line-line Res. @ 25°C | 10.66 Ω |
| Rating - Duty | 40C AMB-CONT | | | Temp. Rise @ Rated Load | 44°C |
| S.F. Amps | | | | Temp. Rise @ S.F. Load | 53°C |
| | | | | Locked-rotor Power Factor | 52 |
| | | | | Rotor inertia | 0.154 LB-FT ² |

Load Characteristics 460 V, 60 Hz, 1.5 HP



| % of Rated Load | 25 | 50 | 75 | 100 | 125 | 150 | S.F. |
|-----------------|--------|--------|--------|--------|--------|--------|------|
| Power Factor | 31 | 51 | 65 | 73 | 79 | 83 | 77 |
| Efficiency | 75.9 | 84.5 | 86.8 | 87.1 | 86.4 | 85.4 | 86.7 |
| Speed | 1790.6 | 1781.1 | 1770.7 | 1760.1 | 1748.1 | 1734.9 | 1753 |
| Line amperes | 1.44 | 1.61 | 1.86 | 2.19 | 2.58 | 2.98 | 2.42 |

Performance Graph at 460V, 60Hz, 1.5HP Typical performance - Not guaranteed values

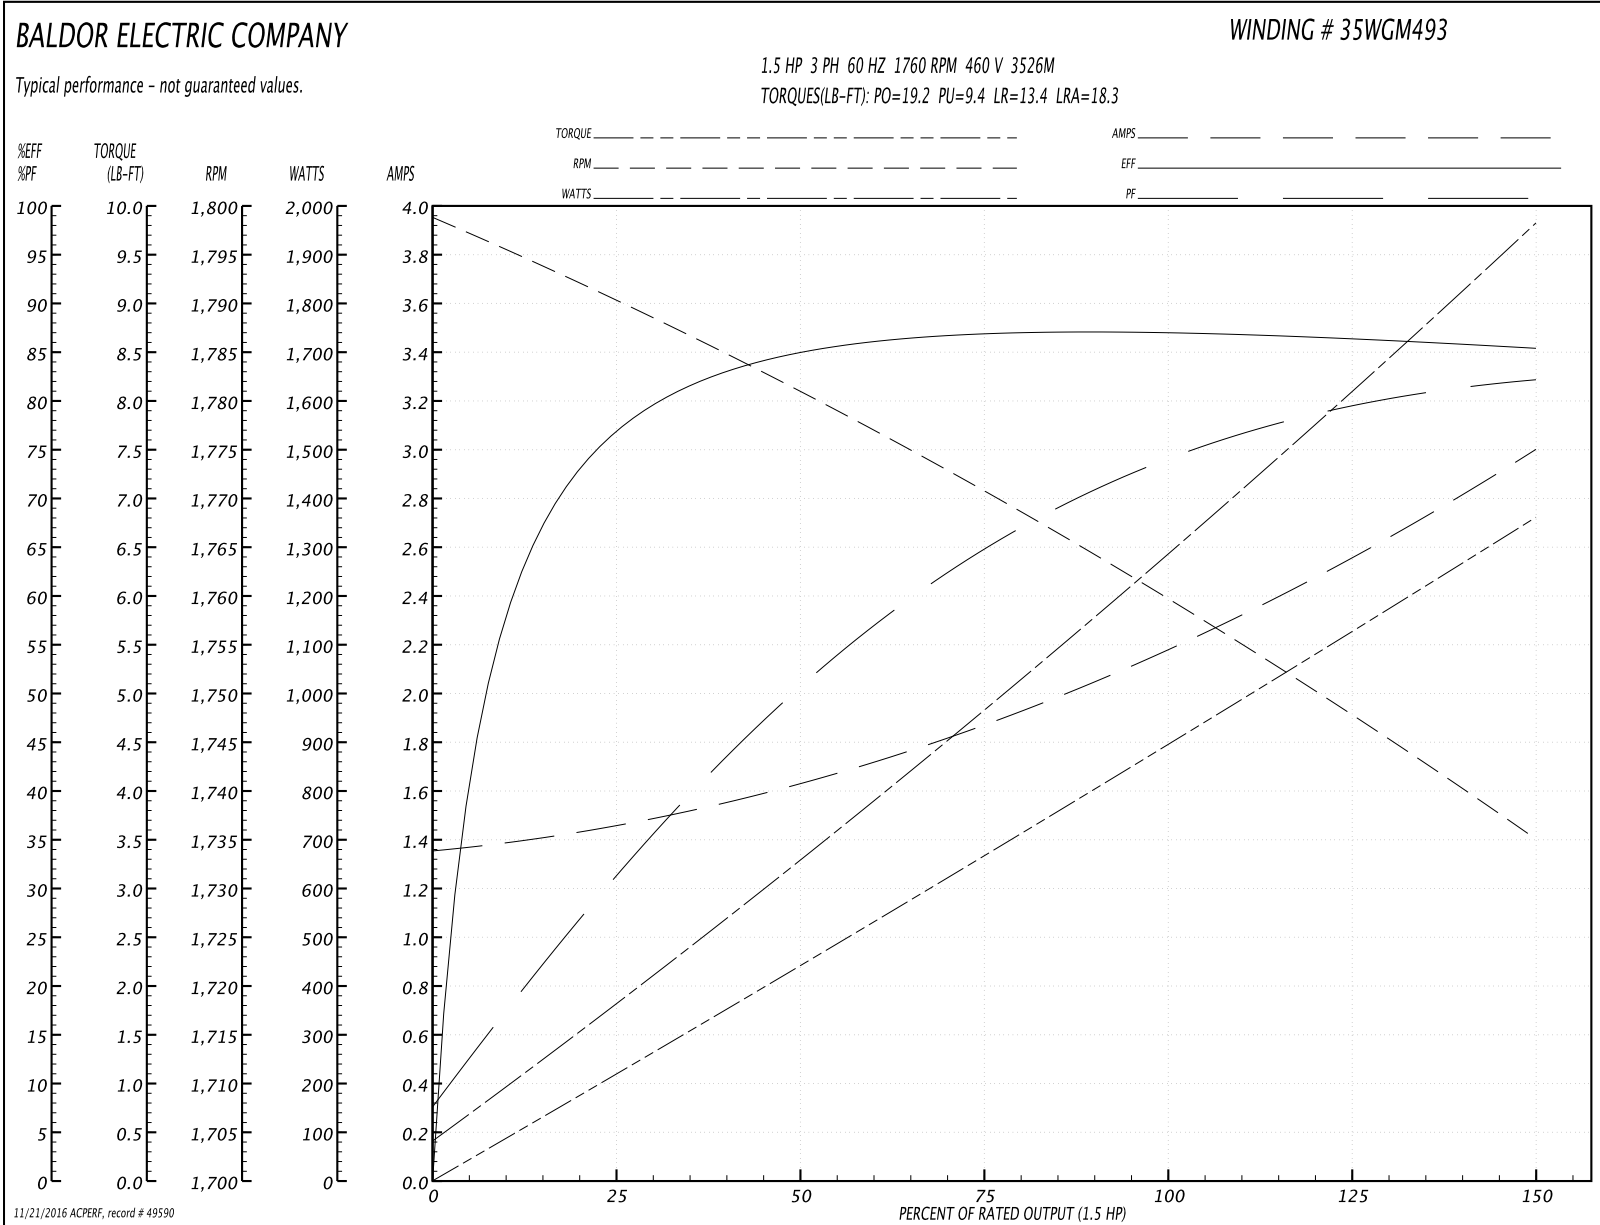

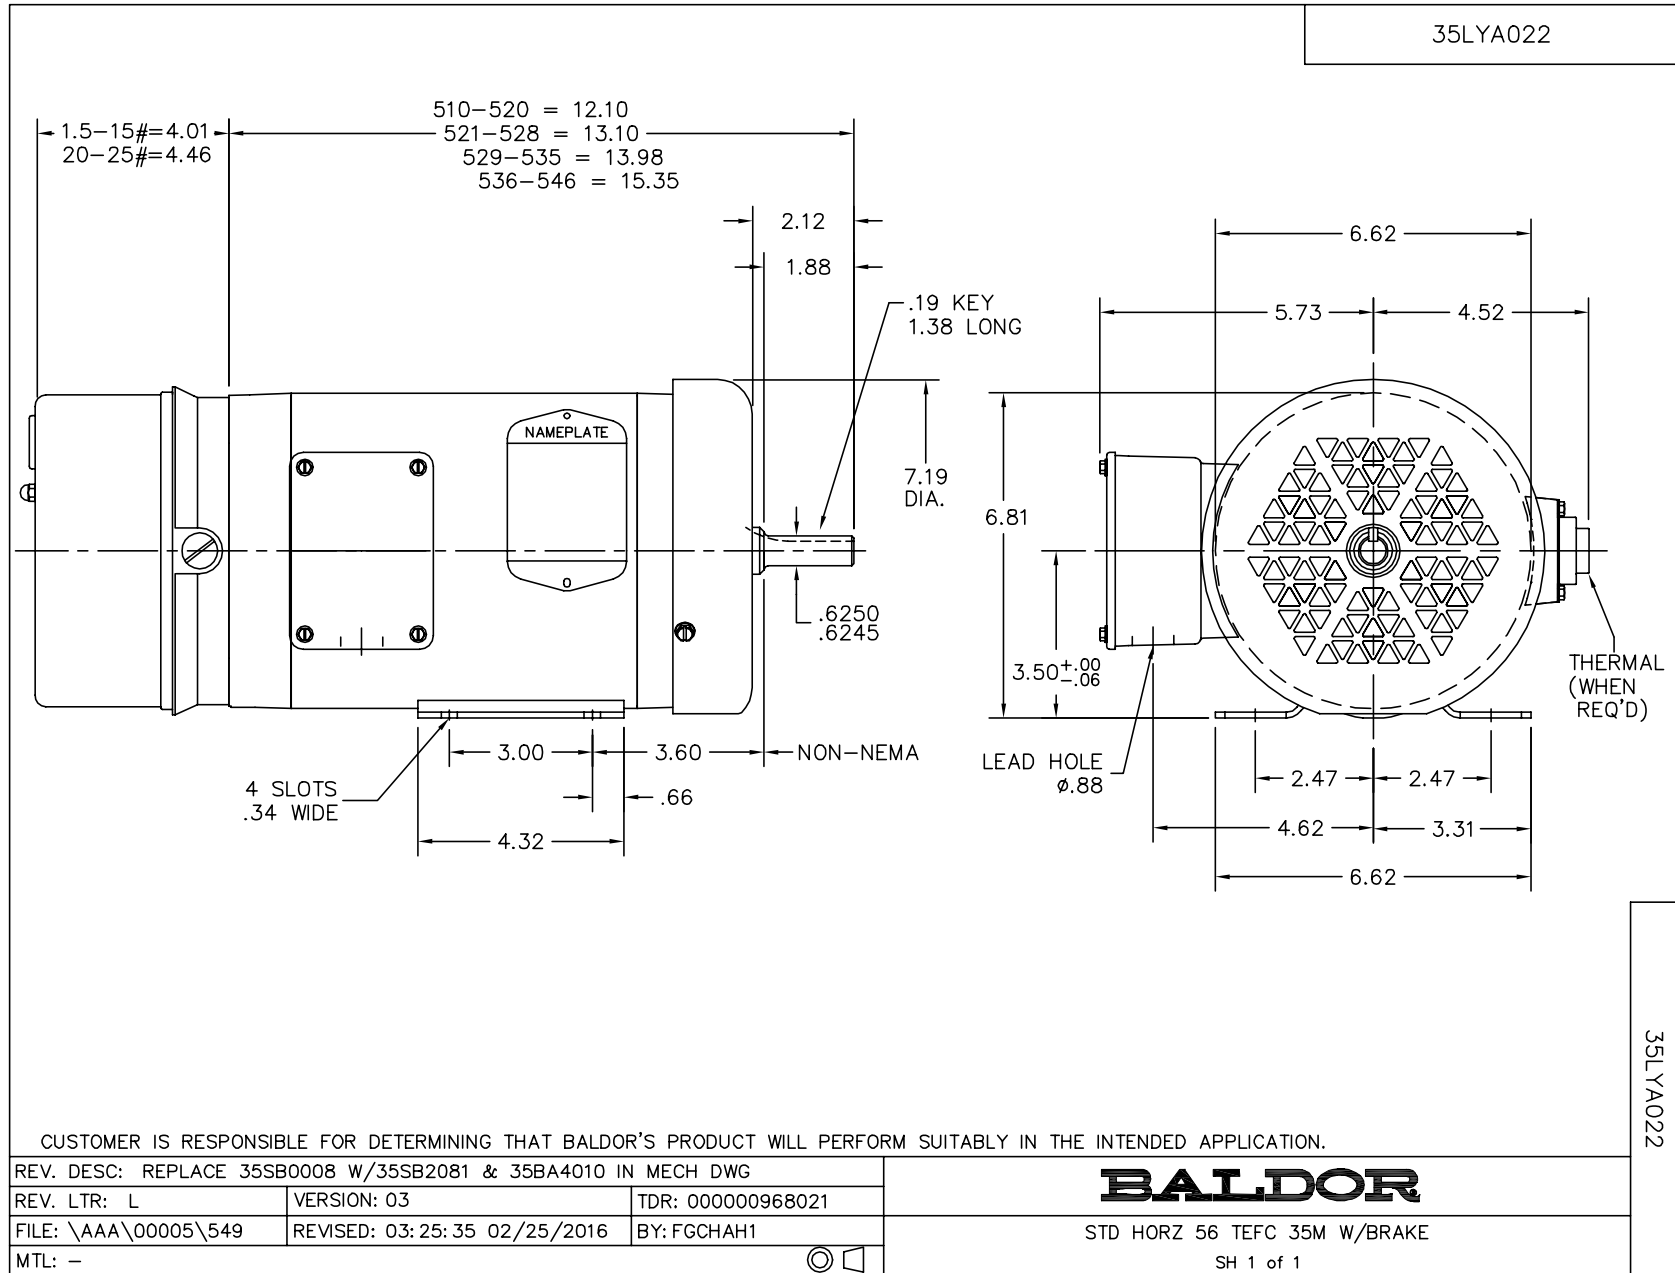

CD0005

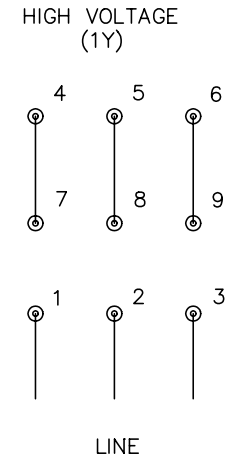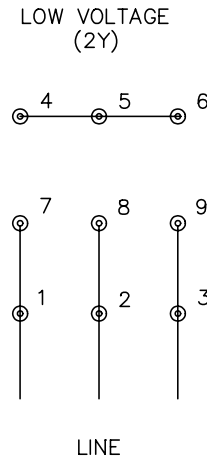

- NOTES:
1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

| | | | |
|---|---------|-------------------------|--------------|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | |
| REV. LTR: E | BY: JLP | REVISED: 01/19/99 10:15 | TDR: 0171435 |
| 900003 | | FILE: AAA00005140 | MDL: - |
| | | MTL: - | |

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005