


# Small Pumps

6 mm (1/4") TO 25 mm (1")

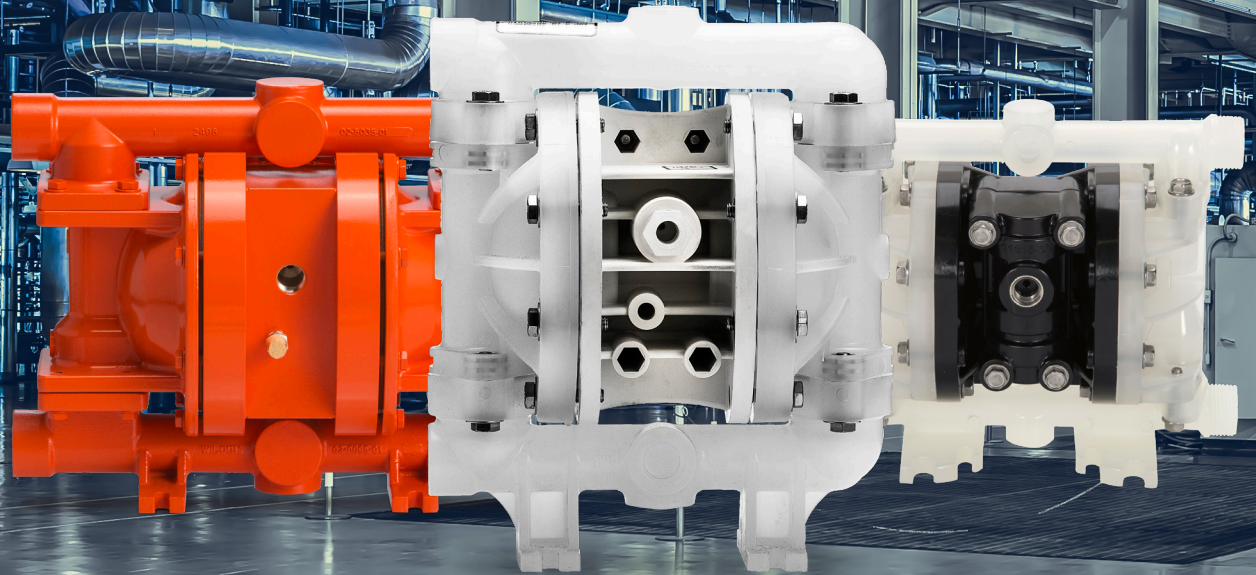

Where Innovation Flows

## WILDEN®

### PRESENTING OUR SMALL AODD PUMP LINEUP

Wilden® has been the global leader in air-operated double-diaphragm (AODD) pump technology since 1955. As the inventor of the AODD pump, Wilden introduces a constant flow of new innovations that have catapulted the positive displacement pump into the future.

Combining elegant simplicity with robust and reliable performance that end users have come to depend on for more than 20 years, the Wilden comprehensive line of small AODD pumps utilize advanced technology to reduce energy and air consumption, minimize maintenance and increase productivity.

Available in a wide range of sizes and material offerings, small AODD pumps from Wilden provide the extreme flexibility, reliability, performance and dependability required in challenging applications.

Contact your Authorized Wilden Distributor today!

### FEATURES AND BENEFITS:



- Complete lineup of sizes and materials
- Maximum reliability & efficiency
- Longest-lasting wear parts
- Lube-free operation
- Anti-freezing
- Non-stalling unbalanced spool
- Simple and durable design

### MARKETS AND APPLICATIONS:

- Chemical Dosing
- Paint and Inks
- Surface Treatment
- Lube Oil
- Commercial Laundry
- Additive Injection
- Sampling

# Technical Specifications

NEW



| Size / Model           | Max. Flow Rate      | Material / Design | Wetted Path Material                             | Max. Suction Lift                      | Max. Solids Passage | Accu-Flo Model | Certifications |
|------------------------|---------------------|-------------------|--|--|---------------------|----------------|----------------|
| 6 mm (1/4") PS25       | 21.6 lpm (5.7 gpm)  | Plastic / Bolted  | Polypropylene, PVDF                              | 4.2 m Dry (14.0')<br>8.5 m Wet (28.0') | 1.6 mm (1/16")      | A25PS          | CE             |
| 6 mm (1/4") P.025      | 18.1 lpm (4.8 gpm)  | Plastic / Clamped | Polypropylene, PVDF                              | 2.7 m Dry (9.0')<br>9.5 m Wet (31.2')  | 0.4 mm (1/64")      | A.025          | CE             |
| 6 mm (1/4") P.025      | 18.9 lpm (5.0 gpm)  | Metal / Clamped   | Aluminum, Stainless Steel                        | 4.0 m Dry (13.0')<br>9.5 m Wet (31.2') | 0.4 mm (1/64")      | A.025          | CE Ex          |
| 13 mm (1/2") P100      | 58.7 lpm (15.5 gpm) | Plastic / Bolted  | Polypropylene, PVDF                              | 5.2 m Dry (17.0')<br>8.7 m Wet (28.4') | 1.6 mm (1/16")      | A100           | CE             |
| 13 mm (1/2") P1        | 56.8 lpm (15.0 gpm) | Plastic / Clamped | Polypropylene, PVDF, PTFE PFA                    | 6.1 m Dry (20.0')<br>9.5 m Wet (31.0') | 1.6 mm (1/16")      | A1             | CE             |
| 13 mm (1/2") PS1       | 60.2 lpm (15.9 gpm) | Metal / Clamped   | Aluminum, Stainless Steel                        | 5.7 m Dry (18.7')<br>9.7 m Wet (31.7') | 1.6 mm (1/16")      | A1             | CE Ex          |
| 25 mm (1") P200        | 220 lpm (58.0 gpm)  | Plastic / Bolted  | Polypropylene, PVDF                              | 3.6 m Dry (11.9')<br>9.4 m Wet (30.0') | 4.7 mm (3/16")      | A200           | CE             |
| 25 mm (1") P2          | 140 lpm (37.0 gpm)  | Plastic / Clamped | Polypropylene, PVDF                              | 5.5 m Dry (18.0')<br>8.8 m Wet (29.0') | 3.2 mm (1/8")       | A2             | CE             |
| 25 mm (1") PS220/PS230 | 212 lpm (56.0 gpm)  | Metal / Bolted    | Alloy C, Aluminum, Ductile Iron, Stainless Steel | 6.9 m Dry (22.7')<br>9.0 m Wet (29.5') | 6.4 mm (1/4")       | N/A            | CE Ex          |
| 25 mm (1") P2          | 172 lpm (45.5 gpm)  | Metal / Clamped   | Aluminum, Stainless Steel                        | 7.6 m Dry (25.0')<br>9.0 m Wet (29.5') | 3.2 mm (1/8")       | A2             | CE Ex          |

Notes: Accu-Flo™ models precisely control the stroke rate of the pump and more accurately control the flow rate for dosing applications.

Bolted Design: Maximum performance and efficiency in a variety of application, plus offers better fluid containment.

Clamped Design: Wilden's original design that offer easier access during maintenance without a sacrifice to reliability. Additional Wilden pump models are available that are not shown in this table. Please contact your Wilden distributor or visit our website to see all available models.

WIL-29000-F-02

Copyright 2023 PSG®, a Dover company

Authorized PSG® Partner:

Where Innovation Flows  a  company

**WILDEN®**

PSG  
22069 Van Buren Street  
Grand Terrace, CA 92313-5651 USA  
P: +1 (909) 422-1730 • F: +1 (909) 783-3440  
[wildenpump.com](http://wildenpump.com)

PSG® reserves the right to modify the information and illustrations contained in this document without prior notice. This is a non-contractual document. 11-2023