

BALDOR® • **RELIANCE**

Product Information Packet

M1724T

5/2.2HP, 1725/1140RPM, 3PH, 60HZ, 215T, 3740M

Part Detail							
Revision:	F	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3740M	Elec. Spec:	37WGY494	CD Diagram:	CD0013
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	37A001	Layout:	37LYA001
Frame:	215T	Mounting:	F1	Poles:	04/06	Created Date:	08-15-2006
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	07-23-2015
Leads:	6#14					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1256L										
CAT.NO.	M1724T									
SPEC.	37A001Y494G1									
HP	5/2.2									
VOLTS	460									
AMP	6.4/3.5									
RPM	1725/1140									
FRAME	215T				HZ	60			PH	3
SER.F.	1.15		CODE	K	DES	B		CLASS	F	
NEMA-NOM-EFF			PF							
RATING	40C AMB-CONT									
CC									USABLE AT 208V	
DE	6307				ODE	6206				
ENCL	TEFC		SN							

Parts List		
Part Number	Description	Quantity
SA147416	SA 37A001Y494G1	1.000 EA
RA136464	RA 37A001Y494G1	1.000 EA
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 EA
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 EA
37GS1000	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
37EP3101A01	FR ENDPLATE, FOR ROUTING PURPOSES	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 EA
37PE3100A01	PUEP ASSEMBLY - ROUTING PUPROSES	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 EA
07FH4007	PRIMED	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 EA
37GS1008SP	37 GS FOR CB LID - LEXIDE	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB

Parts List (continued)		
Part Number	Description	Quantity
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 EA
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.028 GA
HA3104A17	5/16-18X13.250 T-BLT/OHIO	4.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
G0PA1000	PKG GRP, PRINT PK1026A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA

Accessories		
Part Number	Description	Multiplier
37-3301	C FACE KIT	P1

AC Induction Motor Performance Data

Record # 36702 - Typical performance - not guaranteed values


Winding: 37WGY494-R004	Type: 3740M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: High Speed Connection	
Rated Output (HP)	5/2.2			Full Load Torque	15 LB-FT
Volts	460			Start Configuration	direct on line
Full Load Amps	6.4/3.5			Breakdown Torque	51 LB-FT
R.P.M.	1725/1140			Pull-up Torque	36 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	51 LB-FT
NEMA Design Code	B	KVA Code	K	Starting Current	58 A
Service Factor (S.F.)	1.15			No-load Current	2.7 A
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	3.31 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	80°C
S.F. Amps				Temp. Rise @ S.F. Load	96°C

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	70	80	83	85	85	84
Efficiency	75.9	82.2	83.2	81.4	79.4	76	80.2
Speed	1780	1761	1743	1721	1697	1665	1707
Line amperes	3.1	4.1	5.3	6.8	8.4	10.4	7.76

Performance Graph at 460V, 60Hz, 5.0HP Typical performance - Not guaranteed values

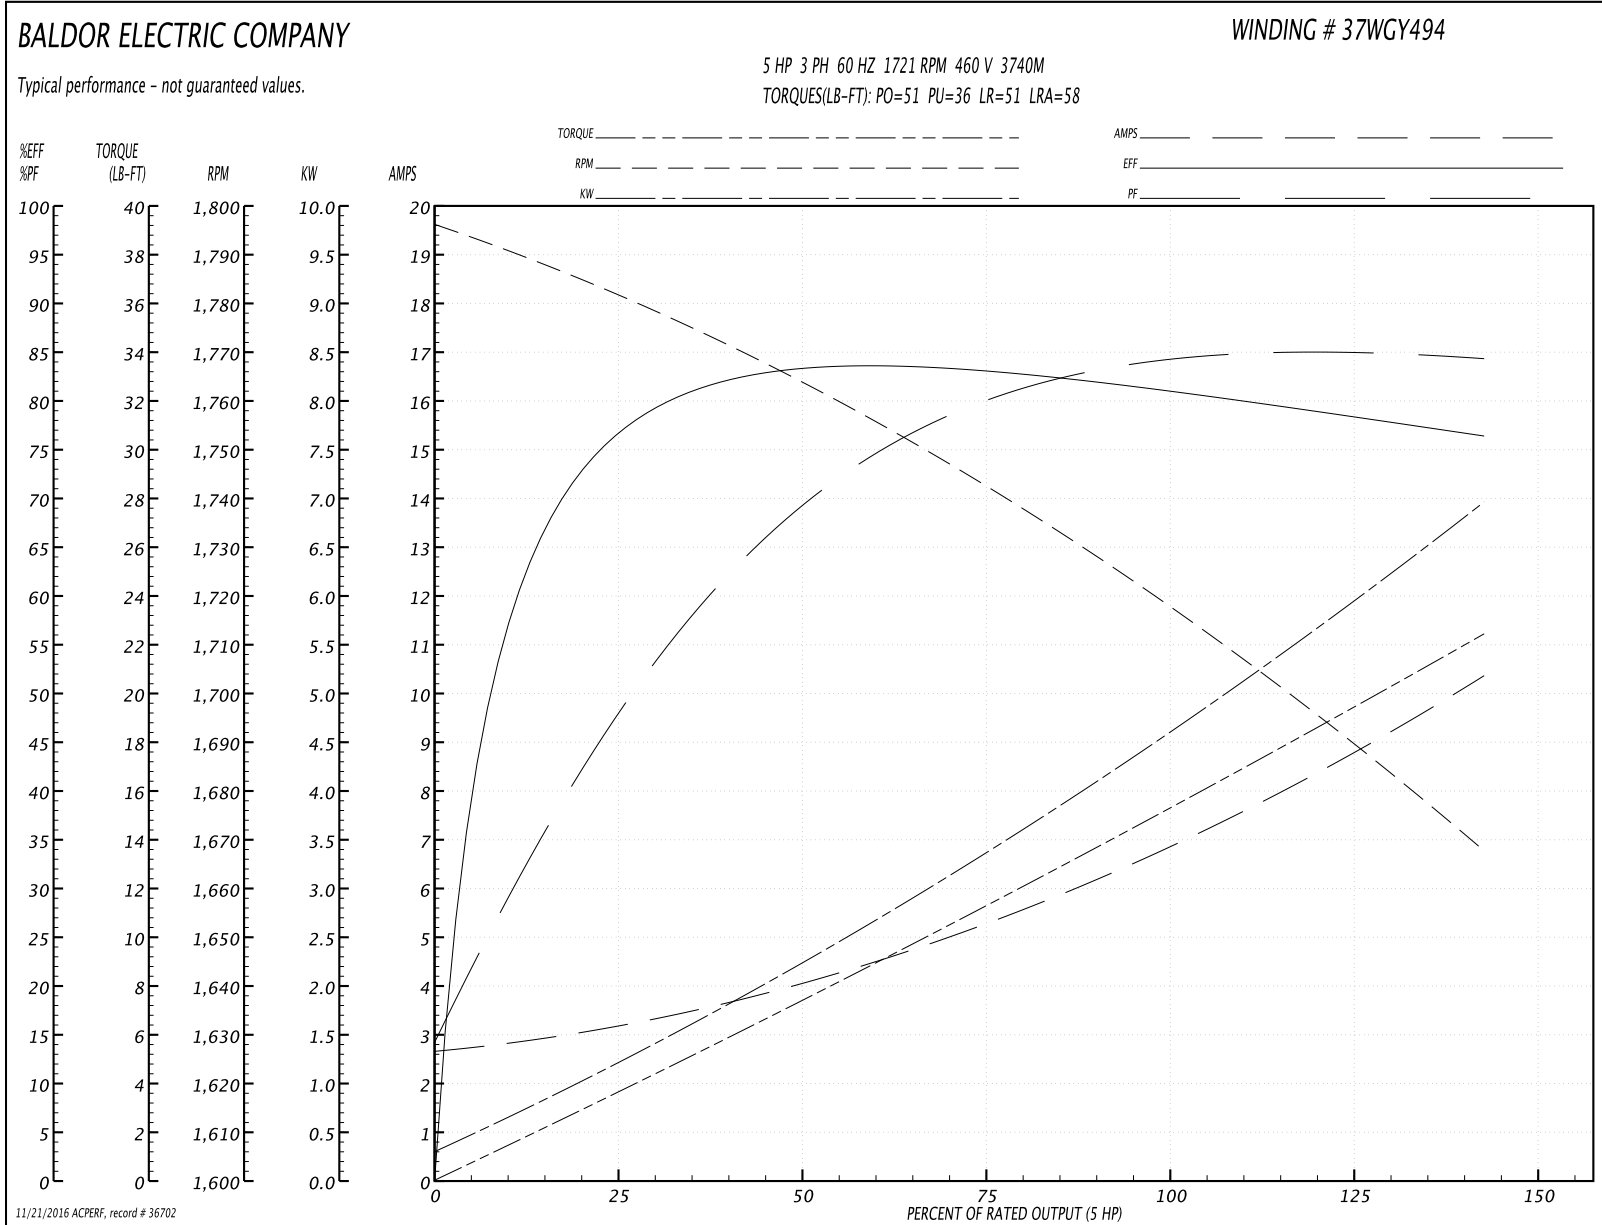

AC Induction Motor Performance Data

Record # 36703 - Typical performance - not guaranteed values

Winding: 37WGY494-R004	Type: 3740M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: Low Speed Connection	
Rated Output (HP)	5/2.2			Full Load Torque	9.9 LB-FT
Volts	460			Start Configuration	direct on line
Full Load Amps	6.4/3.5			Breakdown Torque	25 LB-FT
R.P.M.	1725/1140			Pull-up Torque	13 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	20 LB-FT
NEMA Design Code	B	KVA Code	K	Starting Current	19.5 A
Service Factor (S.F.)	1.15			No-load Current	1.9 A
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	8.58 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	58°C
S.F. Amps				Temp. Rise @ S.F. Load	69°C

Load Characteristics 460 V, 60 Hz, 2.2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	57	68	75	77	79	76
Efficiency	71.6	79.7	80.9	80	77.9	75.1	78.7
Speed	1189	1179	1167	1155	1137	1119	1144
Line amperes	2	2.3	2.8	3.4	4.2	5	3.88

Performance Graph at 460V, 60Hz, 2.2HP Typical performance - Not guaranteed values

