

BALDOR® • **RELIANCE**

Product Information Packet

RM3108A

.5 AIR OVERHP,1725RPM,3PH,60HZ,56,3413M

Part Detail							
Revision:	D	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3413M	Elec. Spec:	34WGR030	CD Diagram:	CD0007
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	34K019	Layout:	34LYK019
Frame:	56	Mounting:	F1	Poles:	04	Created Date:	04-05-2013
Base:	RS	Rotation:	R	Insulation:	B	Eff. Date:	08-05-2016
Leads:	12#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1257L	
CAT.NO.	RM3108A
SPEC.	34K019R030G1
HP	.5 AIR OVER
VOLTS	230/460
AMP	1.8/.9
RPM	1725
FRAME	56
SER.F.	1.25
NEMA-NOM-EFF	72
RATING	40C AMB-CONT
CC	USABLE AT 208V 2.3
DE	6203
ENCL	OPEN
	SFA 2/1
	CODE J
	DES B
	CL B
	PF 68
	HZ 60
	PH 3
	ODE 6203
	SN

Parts List		
Part Number	Description	Quantity
SA261123	SA 34K019R030G1	1.000 EA
RA247861	RA 34K019R030G1	1.000 EA
SP1000A01	TERM BOARD, MODEL 34 SW	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	3.000 EA
34CB4501SP	TERMINAL BOX LID, STAMPED X (PLATED)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
LD5000A52	LEAD ASSY W/INTERNAL STAR RING TERMINALS	1.000 EA
11XT1032A06	10-32 X 3/8 HX WSHR HD SLTD TYPE 23	2.000 EA
34EP3202A01SP	FR ENDPLATE, MACH	1.000 EA
RM1000A03	CUSHION RING, MDL 17-33-34	1.000 EA
RM1000A03	CUSHION RING, MDL 17-33-34	1.000 EA
HA6004A01A	CLAMP CUSHION RING ASSY	2.000 EA
WD4100A01	DP-875 HEYCO PLUG OR 62MP0875 MICRO PLAS	1.000 EA
51XW0832G07	8-32 X 7/16 TY23 HXWS SLDSR GR	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3203A01	PU ENDPLATE, MACH	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
34BA4003A01SP	RESILIENT BASE, (LENGTH 8.22")	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
LC0007	CONNECTION LABEL	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 EA
NP1257L	ALUM UL CSA CC THERMAL REV MTG	1.000 EA
35PA1000	PKG GRP, PRINT PK1008A06	1.000 EA

AC Induction Motor Performance Data

Record # 41850 - Typical performance - not guaranteed values


Winding: 34WGR030-R001	Type: 3413M	Enclosure: OPAO
-------------------------------	--------------------	------------------------


Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.5			Full Load Torque	1.51 LB-FT
Volts	230/460			Start Configuration	direct on line
Full Load Amps	1.8/9			Breakdown Torque	4.56 LB-FT
R.P.M.	1725			Pull-up Torque	2.77 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	3.81 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	4.91 A
Service Factor (S.F.)	1.25			No-load Current	0.669 A
NEMA Nom. Eff.	72	Power Factor	68	Line-line Res. @ 25°C	48.65 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	
S.F. Amps	2/1			Temp. Rise @ S.F. Load	
				Locked-rotor Power Factor	69
				Rotor inertia	0.031 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.5 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	46	58	68	74	79	74
Efficiency	55.9	74.4	77.4	77.4	77.8	75	77.8
Speed	1782	1767	1749	1729	1711	1685	1711
Line amperes	0.684	0.723	0.79	0.886	0.983	1.126	0.983

Performance Graph at 460V, 60Hz, 0.5HP Typical performance - Not guaranteed values

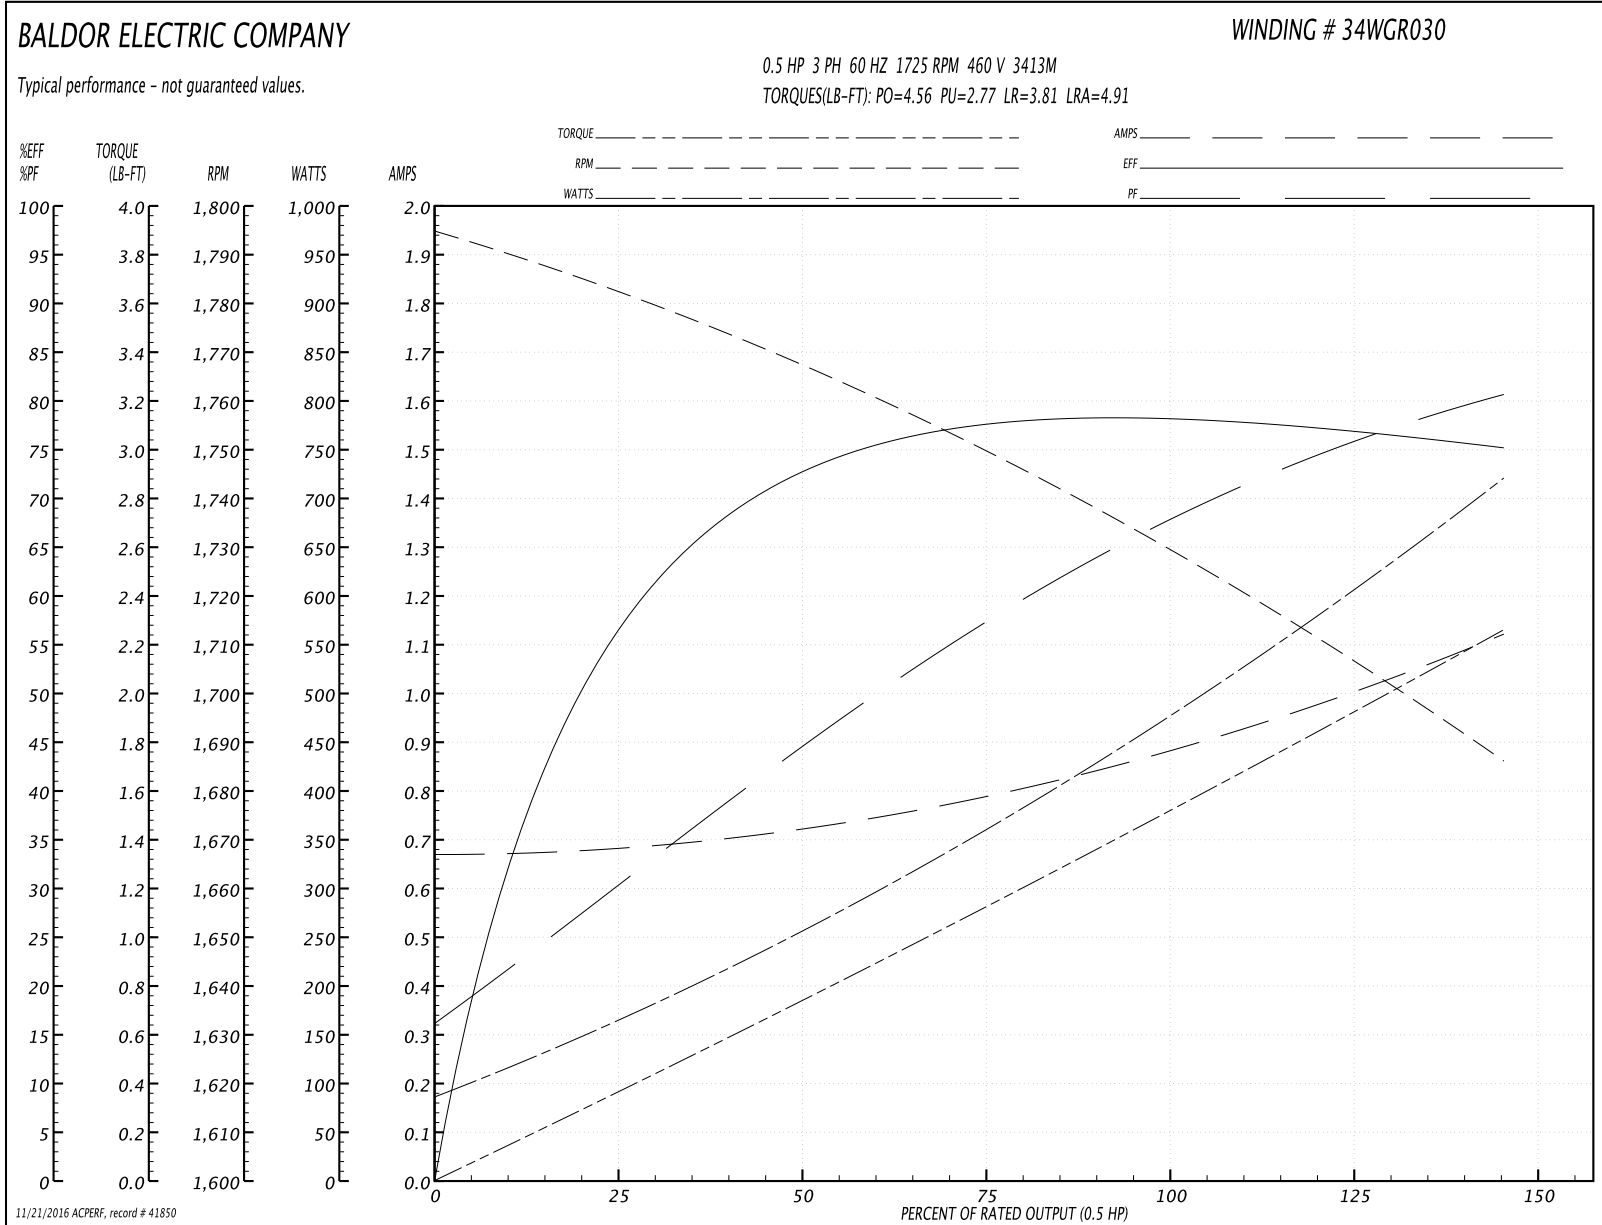


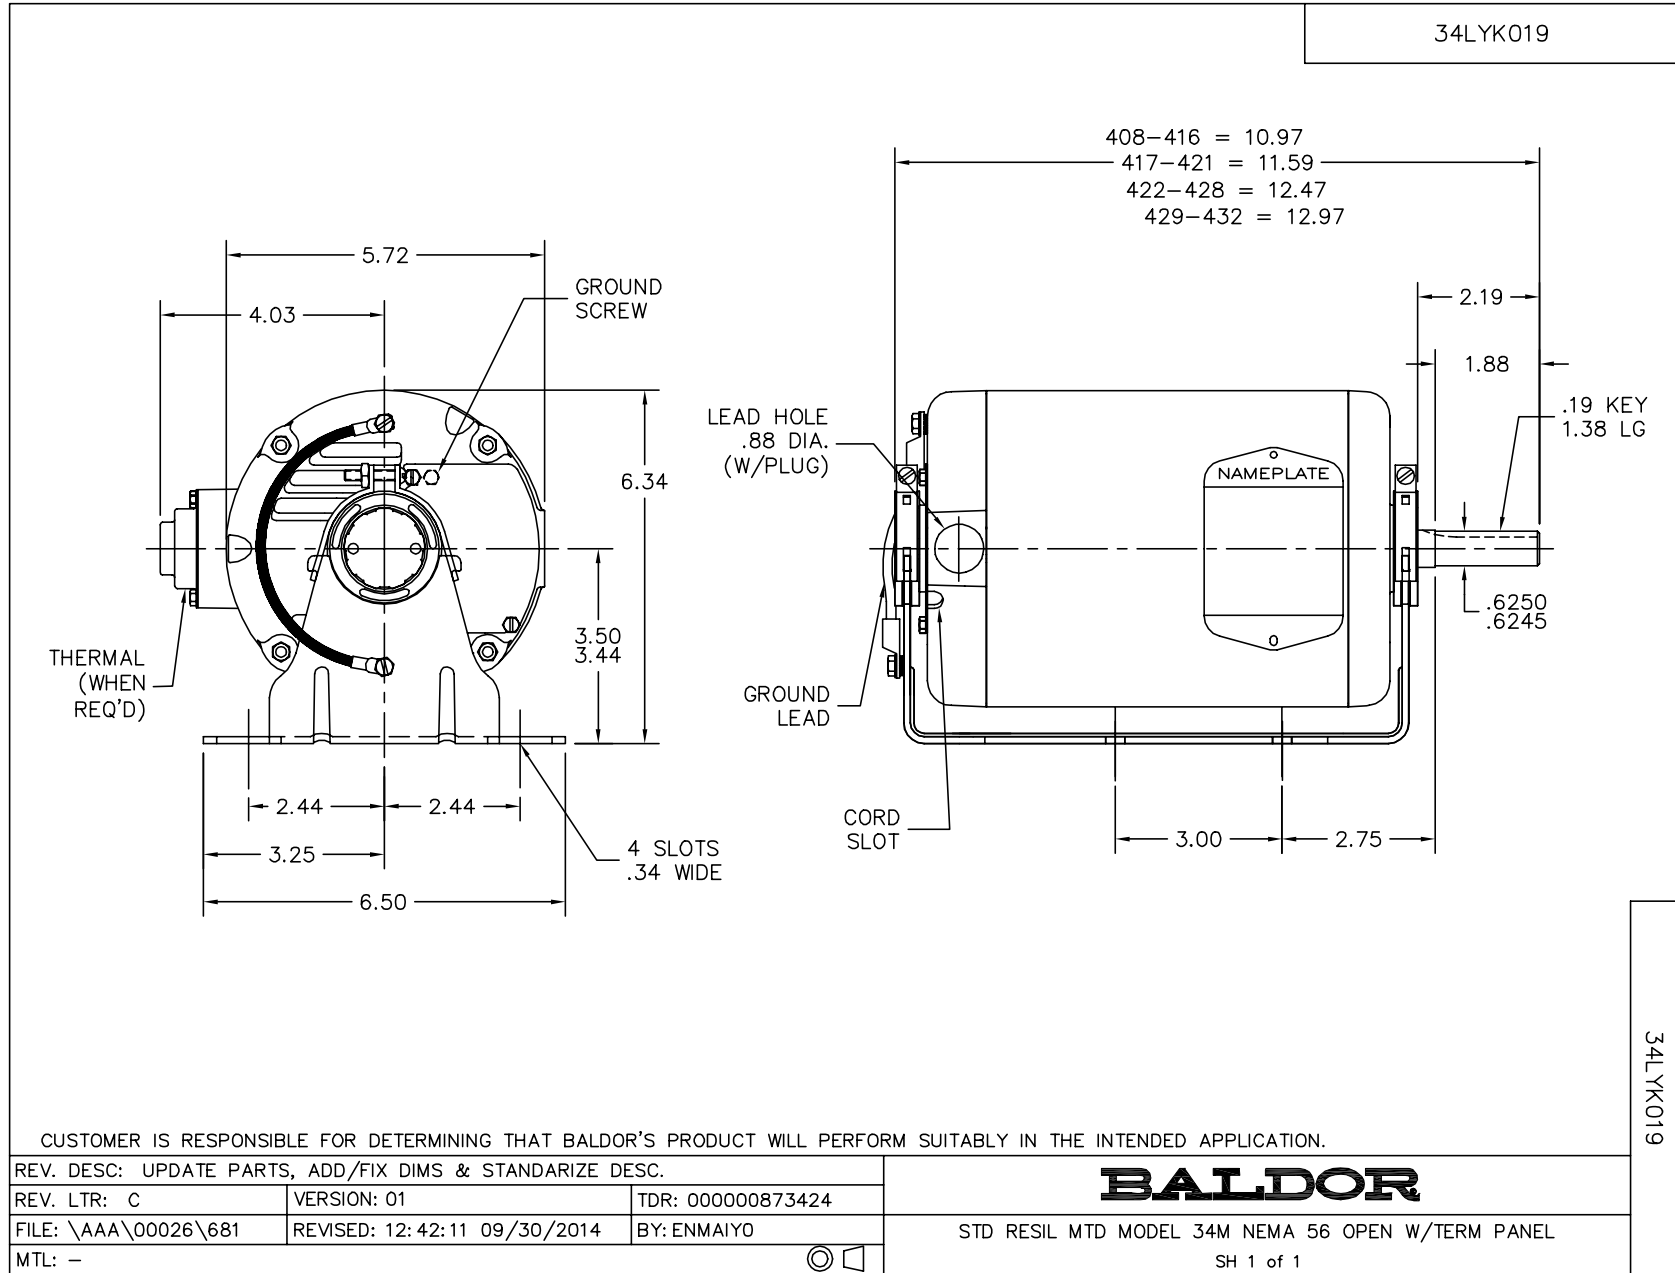

CD0007

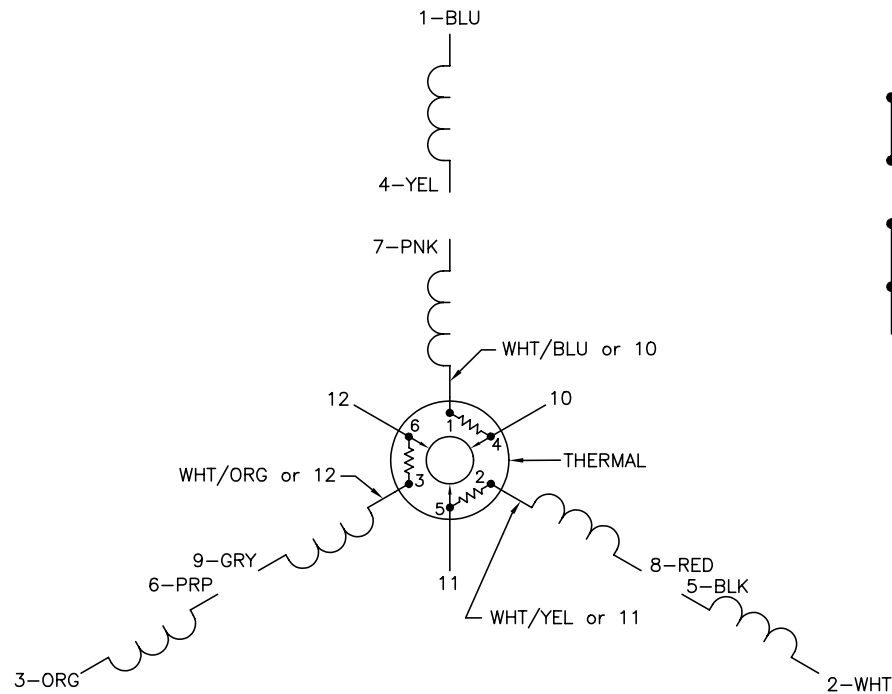


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED "CK" PLANT CODE			
REV. LTR: E	BY: EAH	REVISED: 05/06/99 17:1	TDR: 0181040
L00000		FILE: AAA00008370	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS

CD0007