

BALDOR® • *RELIANCE*

Product Information Packet

VEBM3554-D

1.5HP,1760RPM,3PH,60HZ,56C,3526M,TEFC,F3

| Part Detail | | | | | | | |
|-------------|------|----------------|-------|-------------|----------|---------------|------------|
| Revision: | L | Status: | PRD/A | Change #: | | Proprietary: | No |
| Type: | AC | Prod. Type: | 3526M | Elec. Spec: | 35WGM493 | CD Diagram: | CD0005 |
| Enclosure: | TEFC | Mfg Plant: | | Mech. Spec: | 35X145 | Layout: | 35LYX145 |
| Frame: | 56C | Mounting: | F3 | Poles: | 04 | Created Date: | 09-30-2010 |
| Base: | N | Rotation: | R | Insulation: | F | Eff. Date: | 10-07-2016 |
| Leads: | 9#18 | | | | | Replaced By: | |
| Literature: | | Elec. Diagram: | | | | | |

| Nameplate NP2105L | | | | | | | | | | | |
|-------------------|--------------|--|--|----------------|------|--|-----|---|--|----|---|
| CAT.NO. | VEBM3554-D | | | | | | | | | | |
| SPEC. | 35X145M493G1 | | | | | | | | | | |
| HP | 1.5 | | | | | | | | | | |
| VOLTS | 230/460 | | | | | | | | | | |
| AMP | 4.4/2.2 | | | | | | | | | | |
| RPM | 1760 | | | | | | | | | | |
| FRAME | 56C | | | HZ | 60 | | PH | 3 | | | |
| SER.F. | 1.15 | | | CODE | L | | DES | B | | CL | F |
| NEMA-NOM-EFF | 86.5 | | | PF | 73 | | | | | | |
| RATING | 40C AMB-CONT | | | | | | | | | | |
| CC | 010A | | | USABLE AT 208V | | | 4.5 | | | | |
| DE | 6205 | | | ODE | 6205 | | | | | | |
| ENCL | TEFC | | | SN | | | | | | | |
| | IP44 | | | | | | | | | | |

| Parts List | | |
|-------------|--|----------|
| Part Number | Description | Quantity |
| SA203991 | SA 35X145M493G1 | 1.000 EA |
| RA191246 | RA 35X145M493G1 | 1.000 EA |
| NS2512A01 | INSULATOR, CONDUIT BOX X | 1.000 EA |
| 35CB4007 | KOBX,W/PRIMER (REL# 79097-49-C) | 1.000 EA |
| 35GS3009 | GASKET, KOBX 35CB4006 (411881-15A) | 1.000 EA |
| 51XB1016A05 | 10-16X5/16HX WA SL SR TYB (F/S) | 2.000 EA |
| WD4101A13 | STEEL CAPLUG,BP-1 1/8, PLUG D3561S | 1.000 EA |
| 11XW1032G06 | 10-32 X .38, TAPTITE II, HEX WSHR SLTD U | 1.000 EA |
| HW3001B01 | BRASS CUP WASHER, FOR #8 SCREW | 1.000 EA |
| 35EP3119A01 | SPL FREP TEFC 205 BRG | 1.000 EA |
| HW5100A05 | WVY WSHR F/205 & 304 BRGS | 1.000 EA |
| 35EP3300A33 | SPL FACE MTD EP -ENCL-205 BRG | 1.000 EA |
| 51XN1032A20 | 10-32 X 1 1/4 HX WS SL SR | 2.000 EA |
| 35FH3004A01 | FAN COVER ASSY, BRAKE MTG | 1.000 EA |
| 51XN1032A32 | 10-32 X 2 HX WS SL SR | 4.000 EA |
| HW1001A10 | WASHER, #10 SPLT LK, ZN X | 4.000 EA |
| 35FN3003A01 | EXFN, PLASTIC, 5.88 OD, .626 ID | 1.000 EA |
| 10XN3816K64 | 3/8-16X4 HX HD CAP SCREW, GRADE 5 | 4.000 EA |
| HW1001A38 | LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I | 4.000 EA |
| BR2006B01 | DBSC SPLINED HUB 5/8 BOR | 1.000 EA |
| 35CB4519 | CB LID RAW & UNPRIMED, REL# 79097-50-B | 1.000 EA |
| 35GS3019 | GASKET, FOR KOBX LID 35CB4519 | 1.000 EA |
| 51XW0832A07 | 8-32 X .44, TAPTITE II, HEX WSHR SLTD SE | 4.000 EA |
| WD4006A01 | WIRE JOINT,T&B RB-4 OR RB-44 | 1.000 EA |

| Parts List (continued) | | |
|-------------------------------|--|-----------------|
| Part Number | Description | Quantity |
| HW2501D13 | KEY, 3/16 SQ X 1.375 | 1.000 EA |
| HA7000A04 | KEY RETAINER 0.625 DIA SHAFTS | 1.000 EA |
| 85XU0407S04 | 4X1/4 U DRIVE PIN STAINLESS | 2.000 EA |
| LB1419 | CONNECTION LABEL | 1.000 EA |
| MJ1000A02 | GREASE, POLYREX EM EXXON (USe 4824-15A) | 0.050 LB |
| MG1000N49 | MUNSELL 8.5BG 3.57/2.0, GLOSS 30, B/G, | 0.017 GA |
| HA3100A13 | THRUBOLT 10-32 X 7.750 | 4.000 EA |
| 46BK0304B01 | DBSC-VP-10-MA-230/460 VAC | 1.000 EA |
| LB1119N | WARNING LABEL | 1.000 EA |
| LC0005 | CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING | 1.000 EA |
| MN416A01 | TAG-INSTAL-MAINT no wire (1200/bx) 11/14 | 1.000 EA |
| NP2105L | ALUM SUPER-E UL CSA-EEV CE CC | 1.000 EA |
| G7PA1000 | PKG GRP, PRINT PK1034A06 | 1.000 EA |
| PK3082 | STYROFOAM CRADLE | 3.000 EA |

AC Induction Motor Performance Data

Record # 32424 - Typical performance - not guaranteed values


| | | |
|-------------------------------|--------------------|------------------------|
| Winding: 35WGM493-R001 | Type: 3526M | Enclosure: TEFC |
|-------------------------------|--------------------|------------------------|


| Nameplate Data | | | | 460 V, 60 Hz: High Voltage Connection | |
|-----------------------|--------------|--------------|----|--|--------------------------|
| Rated Output (HP) | 1.5 | | | Full Load Torque | 4.47 LB-FT |
| Volts | 208-230/460 | | | Start Configuration | direct on line |
| Full Load Amps | 4.5-4.4/2.2 | | | Breakdown Torque | 19.2 LB-FT |
| R.P.M. | 1760 | | | Pull-up Torque | 9.4 LB-FT |
| Hz | 60 | Phase | 3 | Locked-rotor Torque | 13.4 LB-FT |
| NEMA Design Code | B | KVA Code | L | Starting Current | 18.3 A |
| Service Factor (S.F.) | 1.15 | | | No-load Current | 1.37 A |
| NEMA Nom. Eff. | 86.5 | Power Factor | 73 | Line-line Res. @ 25°C | 10.66 Ω |
| Rating - Duty | 40C AMB-CONT | | | Temp. Rise @ Rated Load | 44°C |
| S.F. Amps | | | | Temp. Rise @ S.F. Load | 53°C |
| | | | | Locked-rotor Power Factor | 52 |
| | | | | Rotor inertia | 0.154 LB-FT ² |

Load Characteristics 460 V, 60 Hz, 1.5 HP

| % of Rated Load | 25 | 50 | 75 | 100 | 125 | 150 | S.F. |
|-----------------|--------|--------|--------|--------|--------|--------|------|
| Power Factor | 31 | 51 | 65 | 73 | 79 | 83 | 77 |
| Efficiency | 75.9 | 84.5 | 86.8 | 87.1 | 86.4 | 85.4 | 86.7 |
| Speed | 1790.6 | 1781.1 | 1770.7 | 1760.1 | 1748.1 | 1734.9 | 1753 |
| Line amperes | 1.44 | 1.61 | 1.86 | 2.19 | 2.58 | 2.98 | 2.42 |

Performance Graph at 460V, 60Hz, 1.5HP Typical performance - Not guaranteed values

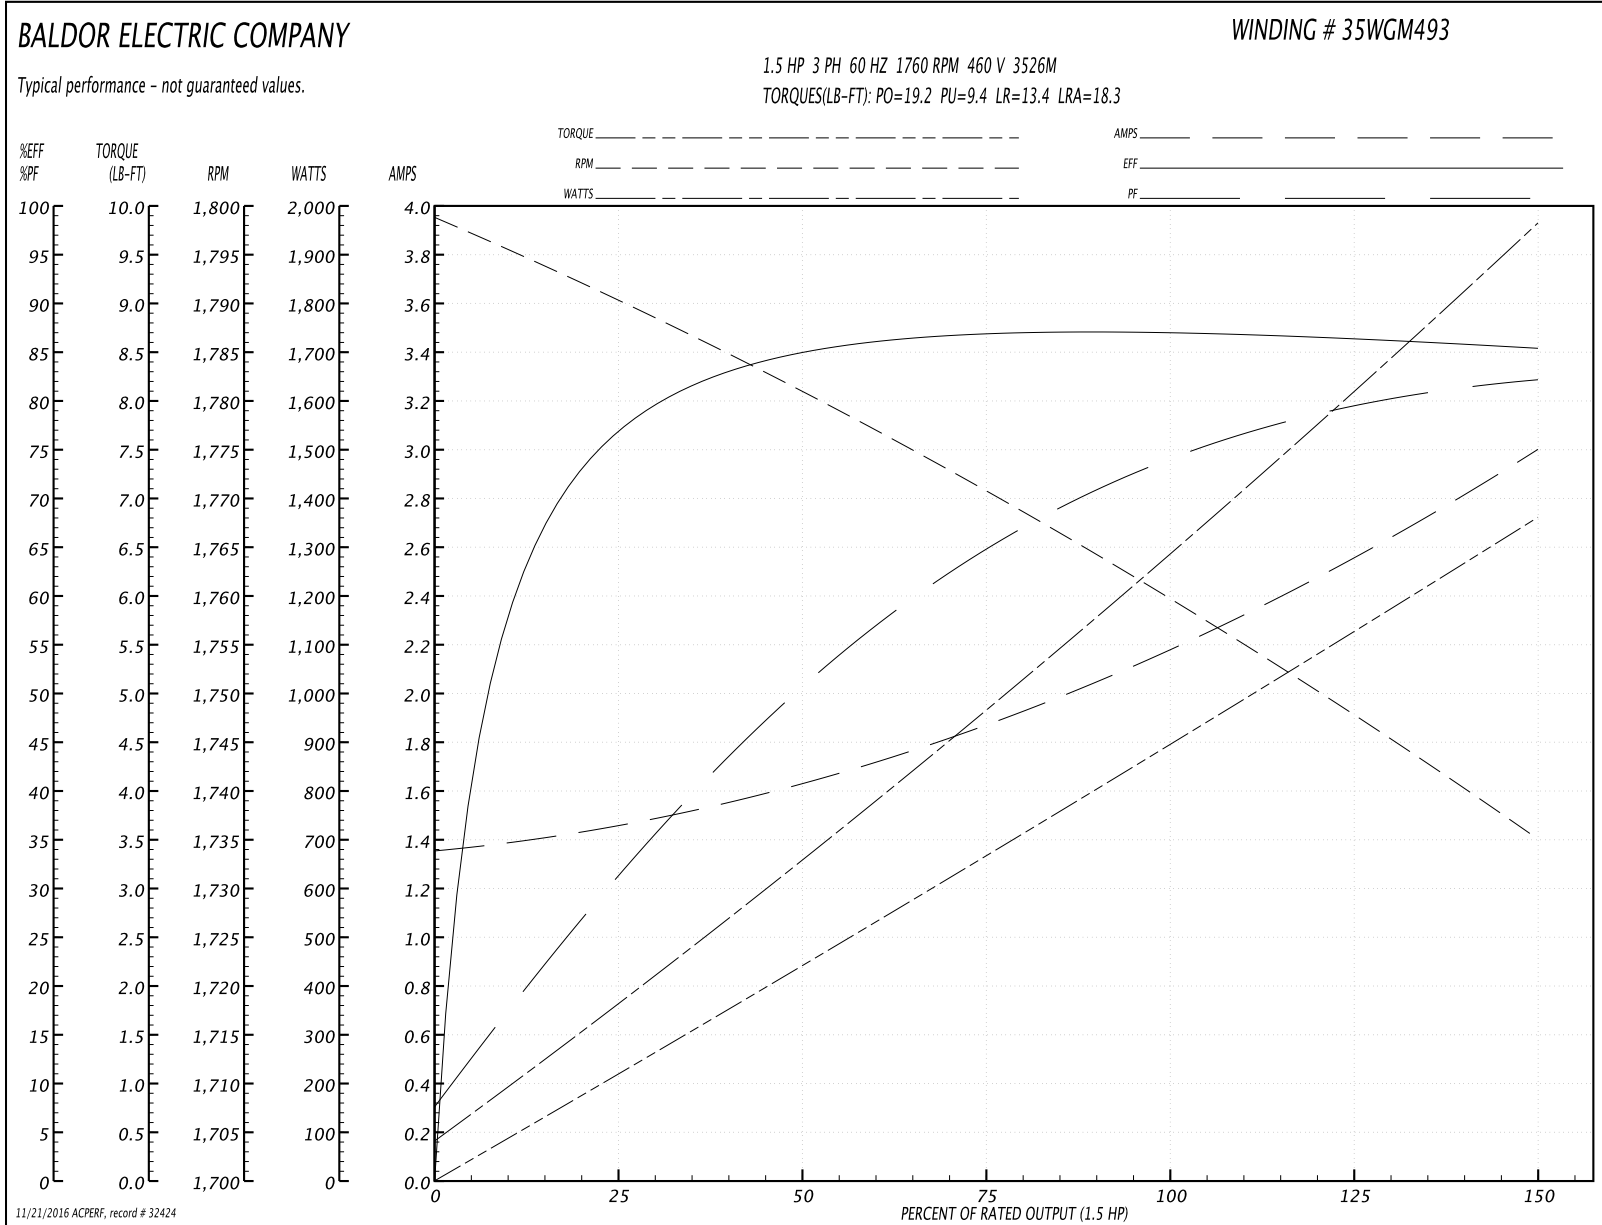

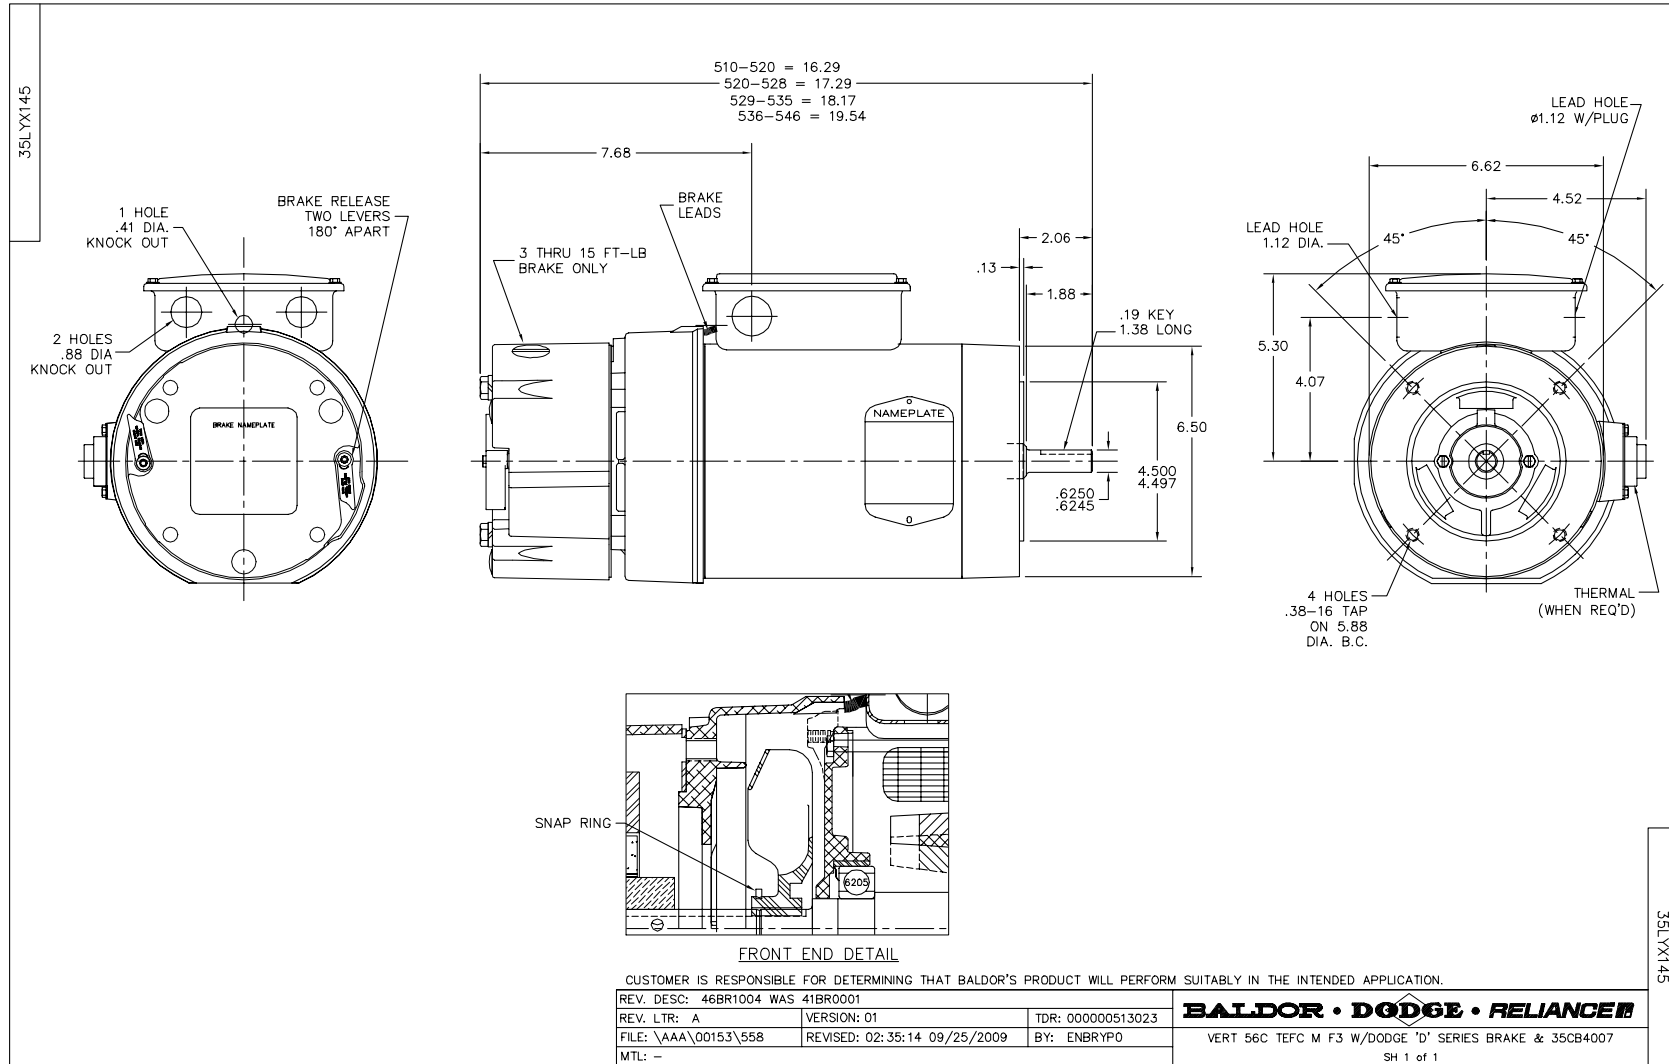


CD0005



LOW VOLTAGE
(2Y)



HIGH VOLTAGE
(1Y)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

| | | | |
|---|---------|-------------------------|--------------|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | |
| REV. LTR: E | BY: JLP | REVISED: 01/19/99 10:15 | TDR: 0171435 |
| 9000D | | FILE: AAA00005140 | MDL: - |
| | | MTL: - | |

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005