

SUBMERSIBLE SOLIDS HANDLING PUMP

Series: 4BWSE-DS
2 - 7.5 HP / 1750 RPM
Discharge: 4"
Spherical solids handling: 3"



DISCHARGE

4", 125lb, flange horizontal.

LIQUID TEMPERATURE

104 °F (40 °C) continuous, 140 °F (60 °C) intermittent operation.

VOLUTE

Cast iron ASTM A-48 class 30

MOTOR HOUSING

Cast iron ASTM A-48 class 30

SEAL PLATE

Cast iron ASTM A-48 class 30

IMPELLER

Design: 2 vane, semi-open, with vanes on back side.

Material: cast iron ASTM A-48 class 30

SHAFT

416 series stainless steel

SQUARE RINGS

Buna-N

PAINT

Air dry enamel, water based.

SEAL

Design: dual, mechanical, oil filled chamber.

Material: silicon carbide with Viton type 01 outer seal, carbon ceramic with Buna-N type 01 inner seal, with stainless steel hardware.

HARDWARE

300 series stainless steel

CORD ENTRY



40 ft of cord, epoxy sealed housing with secondary pressure grommet for sealing and strain relief.

MOTOR

NEMA B, three-phase and single-phase, 230 & 460 volts, 60 Hz, 1750 RPM, oil filled, with class F insulation. Requires overload protection to be included in control panel.

OPTIONAL EQUIPMENT


Additional cord, tungsten carbide seal, slide rail coupling (SRC-4).

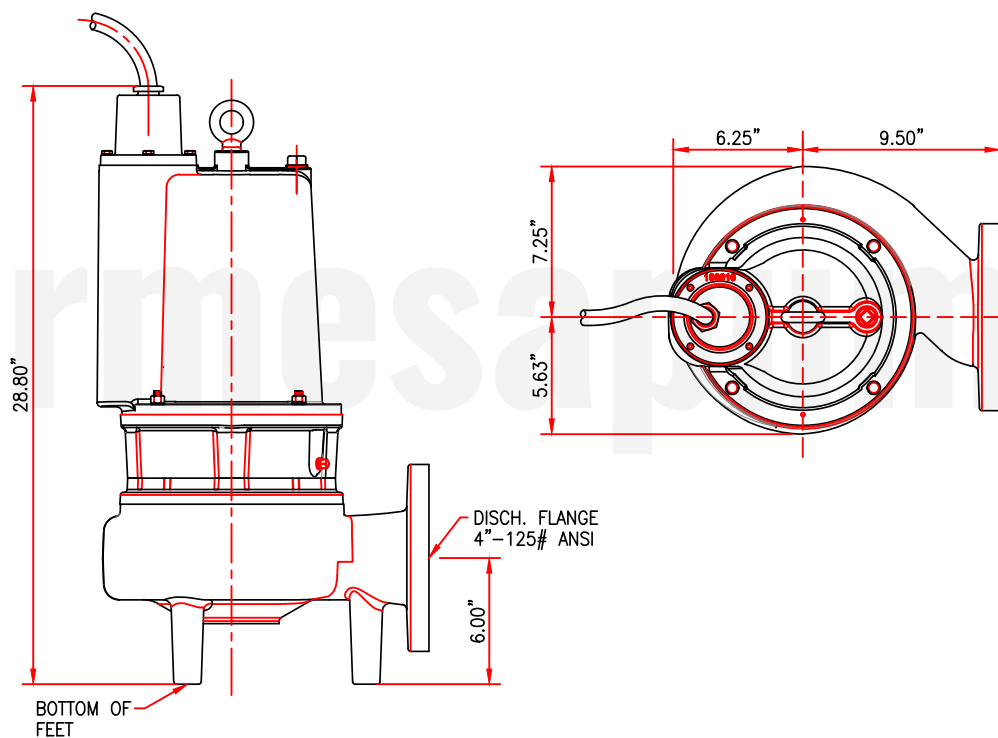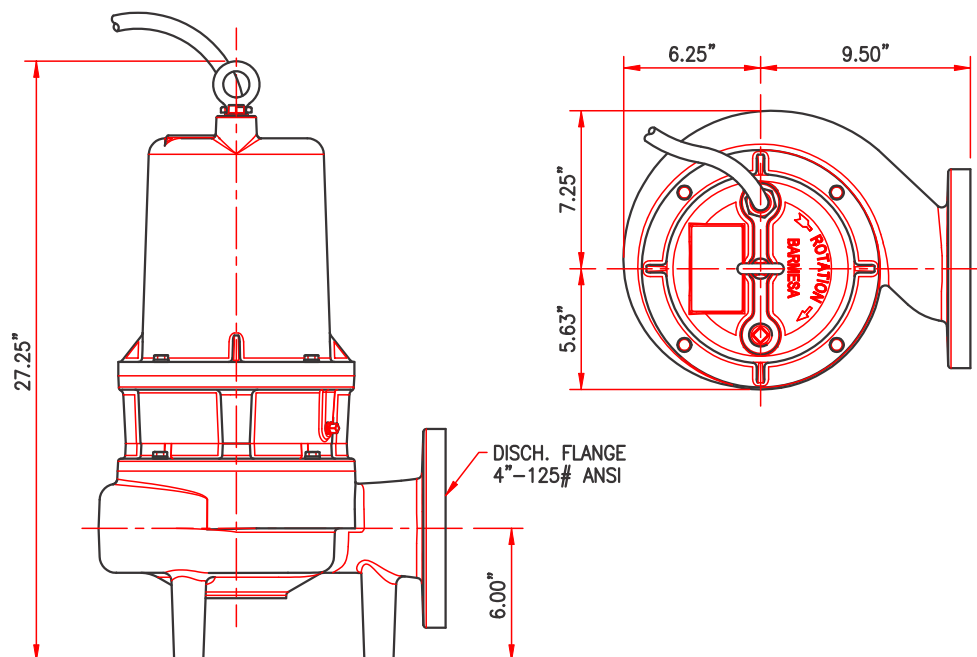

MODEL	PART No.	HP	V	PH	RPM (Nominal)	MAX AMPS	LOCKED ROTOR AMPS	NEMA CODE	CORD SIZE	CORD TYPE	WEIGHT (pounds)
4BWSE202DS	62170160D	2	230	1	1750	18	72.3	C	10/3	STOW	245
4BWSE203DS	62170151	2	208/230	3	1750	15.8/14.3	40	F	14/4	STOW	200
4BWSE204DS	62170152	2	460	3	1750	7.2	20	F	14/4	STOW	200
4BWSE302DS	62170159	3	230	1	1750	20.8	83.2	C	10/3	STOW	247
4BWSE303DS	62170153	3	208/230	3	1750	17.3/15.9	49.5	H	14/4	STOW	205
4BWSE304DS	62170154	3	460	3	1750	8	24.8	H	14/4	STOW	205
4BWSE503DS	62170155	5	208/230	3	1750	24.2/22.1	63.6	E	14/4	STOW	210
4BWSE504DS	62170156	5	460	3	1750	11	31.8	E	14/4	STOW	210
4BWSE753DS	62170157	7.5	208/230	3	1750	26.6/24.6	105	G	10/4	STOW	225
4BWSE754DS	62170158	7.5	460	3	1750	12.3	52.5	G	10/4	STOW	225

IMPORTANT!

1. Do not use the pump to handle explosive or corrosive liquids.
2. This pump is not approved for use in swimming pools, recreational facilities, or any application where human contact with the pump is common.
3. Do not operate the pump dry for extended periods; this may damage the motor or the seal.

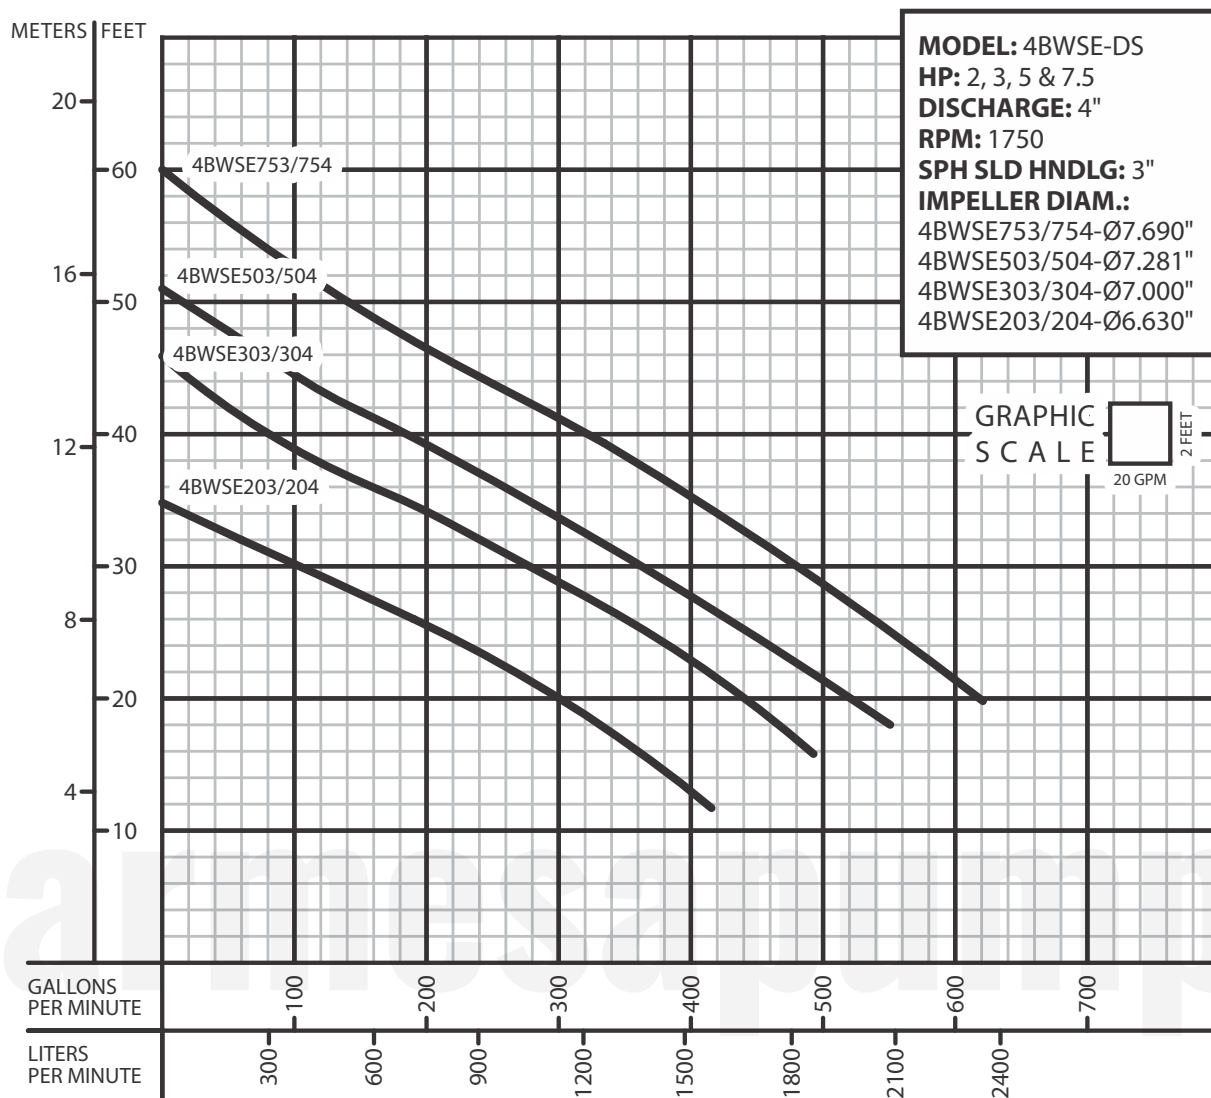

IMPORTANT!

4. Testing is performed with water specific gravity of 1.0 @ 68 °F (20 °C); other fluids may vary performance.