



MYERS®

TWO-STAGE CENTRIFUGAL PUMPS

CONSTRUCTION AVAILABLE

- ALL IRON
- BRONZE FITTED

MYERS® TWO-STAGE CENTRIFUGAL PUMPS

Rugged and Versatile

MYERS I2C and I2CI Two-Stage Centrifugal pumps are designed and built for rugged continuous duty service. This general service pump can be utilized in a wide variety of applications. Over the years MYERS multistage centrifugals have earned a reputation for dependable performance and quality workmanship, delivering maximum performance with smooth, quiet operation.

These high head (to 400 feet) medium capacity (to 140 GPM) pumps are available in standard fitted (I2C) and all iron (I2CI) construction. The I2C and I2CI have threaded 2" suction and 1 1/2" discharge ports. All frame mounted motor driven units are standard with 3450 RPM, 60 hertz, three phase motors in 5 to 20 horsepower sizes.


They are 230 / 460 volt, open drip proof, general purpose type. For special motors, please consult the factory.

APPLICATIONS


- Booster service
- Irrigation
- Cold and hot water circulation
- Fluid transfer
- Boiler feed
- Car wash installations
- Water reclamation
- Water supply
- Golf course sprinkling
- General industrial and commercial applications
- Jobs requiring pumping clear or noncorrosive liquids


PERFORMANCE CURVES

I2C AND I2CI TWO-STAGE CENTRIFUGALS
1 1/2" DISCHARGE 2" SUCTION MOTOR DRIVEN-3450 RPM

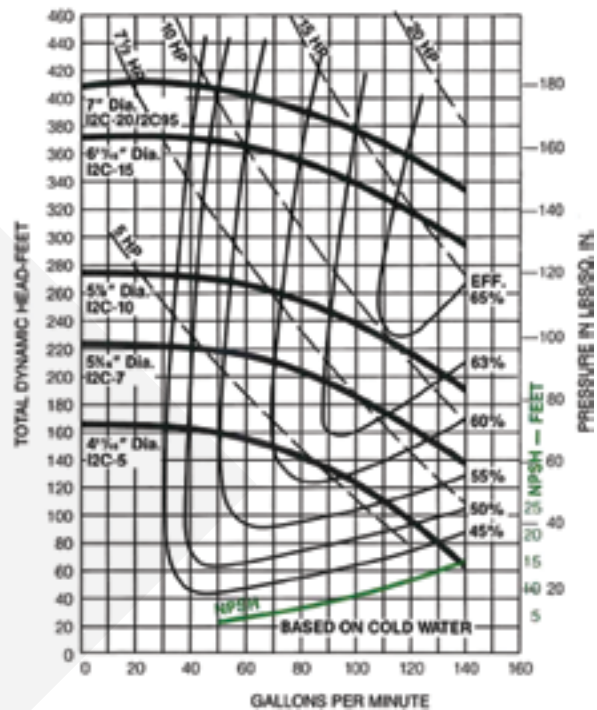

1700 RPM

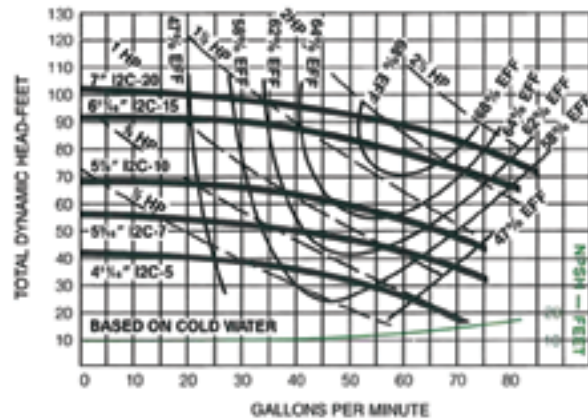

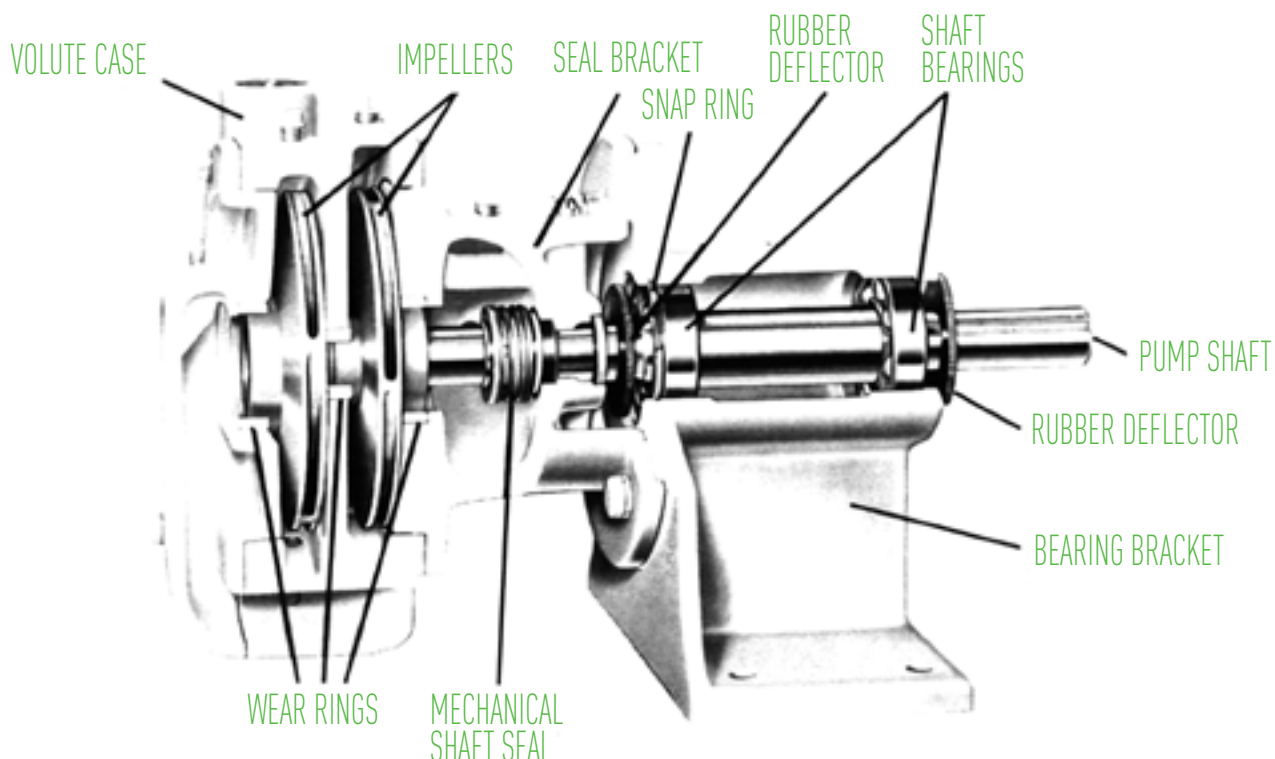

CONSTRUCTION MATERIALS

VOLUTE CASE

High tensile gray iron casting with wear rings. Threaded discharge tapping rotates to 8 positions.

SEAL BRACKET

High tensile gray iron casting with threaded suction tapping. Seal bracket has oil chamber to lubricate and cool the seal face.

DRAIN PLUGS

Plugs are conveniently located so case can be completely drained in any discharge position.

BEARING BRACKET

Heavy duty bracket provides rigid support for liquid end. Holds shaft bearings in perfect alignment with pump case for quiet operation.

SHAFT BEARINGS

Heavy duty ball bearings, sealed on outboard side, lubricated at the factory.

IMPELLERS

Dual enclosed impellers are hydraulically and dynamically balanced. Mounted back-to-back for reduced axial thrust, results in vibration free operation and minimum bearing load. I2C has bronze impellers and I2CI has epoxy coated, high tensile gray iron impellers.

WEAR RINGS

Replaceable wear rings and interstage bushings help to eliminate wear of the casting in the impeller hub and ring area. Bronze in I2C, Ni-Resist in I2CI.

MECHANICAL SHAFT SEAL

Located on suction side to provide lower pressure differential and longer seal life and maximum positive inlet pressure of 75 PSI. Standard seal will accommodate 220°F. Please consult factory for special seal applications.

PUMP SHAFT

Manufactured from tough corrosion resistant 416 stainless steel.

RUBBER DEFLECTOR

Molded rubber deflector protects bearings from moisture and dirt.

SNAP RING



Carbon steel ring holds bearing/shaft assembly in place, prevents axial movement of the bearings and shaft.

MOTOR (FRAME MOUNTED UNITS)

General purpose, 3450 RPM open drip proof. 230/460 volt motor is standard. TEFC motors available on request. Frame mounted units use a flexible coupling for easy motor or pump replacement. Mounted on a heavy-duty welded steel base.

SPECIFICATIONS (For estimating only)

I2C (Standard Fitted), I2CI (All Iron) Two-Stage Centrifugals

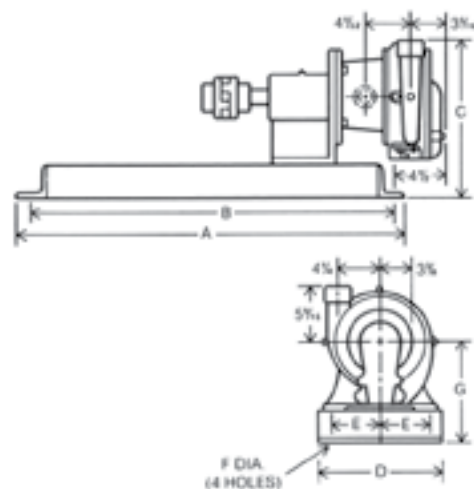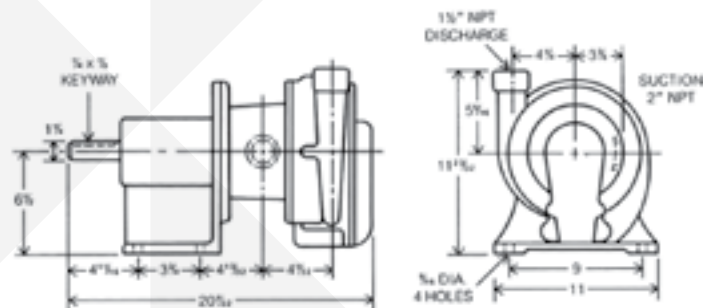


Basic Pumps

Catalog No.	Engr. No.	Standard Impeller Dia.	Approx. Ship Wt. Lbs.
I2C-5	15034E014	4 11/16"	125
I2CI-S	15034E034		
I2C-7	15034E013	5 5/16"	125
I2CI-7	15034E033		
I2C-10	15034E012	5 7/8"	125
I2CI-10	15034E032		
I2C-15	15034E011	6 11/16"	125
I2CI-15	15034E031		
I2C-20	15034E010	7"	125
I2CI-20/2C95	15034E001		

Frame Mounted (Less Motor)

Catalog No.	Engr. No.	Recom. Motor HP and Frame	Pump Shaft Dia.	Motor Shaft Dia.	DIMENSIONS, INCHES								Approx. Ship Wt. Lbs.
					A	B	C	D	E	F	G		
I2CB-5	17375B014	5	1 1/4"	1 1/8"	37	35	14 13/16	12	5	5/8	9 1/2		250
I2CIB-5	17375B039	182T											
I2CB-7	17375B013	7 1/2	1 1/4"	1 1/8"	37	35	14 13/16	12	5	5/8	9 1/2		250
I2CIB-7	17375B038	184T											
I2CB-10	17375B012	10	1 1/4"	1 3/8"	42	40	15 5/16	15	6 1/2	11/16	10		250
I2CIB-10	17375B037	213T											
I2CB-15	17375B011	15	1 1/4"	1 3/8"	42	40	15 5/16	15	6 1/2	11/16	10		250
I2CIB-15	17375B036	215T											
I2CB-20	17375B010	20	1 1/4"	1 5/8"	42	40	15 5/16	15	6 1/2	11/16	10		250
I2CIB-20	17375B035	254T											

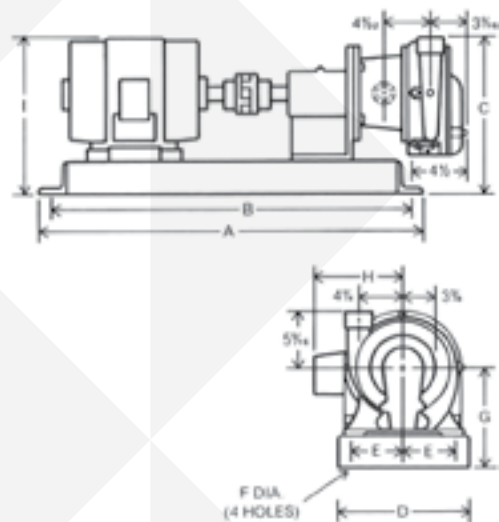

Frame Mounted (With Motor)

Catalog No.	Engr. No.	Motor HP	Pump Shaft Dia.	Motor Shaft Dia.	DIMENSIONS, INCHES										Approx. Ship Wt. Lbs.
					A	B	C	D	E	F	G	H	I		
I2CB-SM	17375B999*	5	1 1/4"	1 1/8"	37	35	14 13/16	12	5	5/8	9 1/2	8 1/16	14 13/16		386
I2CIB-SM	17375B998*														
I2CB-SM	17375B004	5	1 1/4"	1 1/8"	37	35	14 13/16	12	5	5/8	9 1/2	8 1/16	14 13/16		356
I2CIB-SM	17375B034														
I2CB-7M	17375B003	7 1/2	1 1/4"	1 1/8"	37	35	14 13/16	12	5	5/8	9 1/2	8 1/16	14 13/16		360
I2CIB-7M	17375B033														
I2CB-10M	17375B002	10	1 1/4"	1 3/8"	42	40	15 5/16	15	6 1/2	11/16	10	8 7/8	15 5/16		400
I2CIB-10M	17375B032														
I2CB-15M	17375B001	15	1 1/4"	1 3/8"	42	40	15 5/16	15	6 1/2	11/16	10	8 7/8	15 5/16		440
I2CIB-15M	17375B031														
I2CB-20M	17375B000	20	1 1/4"	1 5/8"	42	40	15 5/16	15	6 1/2	11/16	10	9 11/16	15 5/16		500
I2CIB-20M	17375B030														

*Single Phase



740 EAST 9TH STREET,
ASHLAND, OHIO 44805
WWW.FEMYERS.COM

490 PINEBUSH ROAD, UNIT 4
CAMBRIDGE, ONTARIO
N1T 0A5
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K3149 12/11/13 © 2013 Pentair. All Rights Reserved.