

BALDOR® • **RELIANCE**

Product Information Packet

CTM1763T

25/6.3HP, 1760/870RPM, 3PH, 60HZ, 284T, 1040M

Part Detail							
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	1040M	Elec. Spec:	10WGW442	CD Diagram:	CD0032
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	10H161	Layout:	10LYH161
Frame:	284T	Mounting:	F1	Poles:	04/08	Created Date:	08-15-2014
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	12-02-2015
Leads:	6#10					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1258E											
CAT.NO.	CTM1763T										
SPEC.	10H161W442G1										
HP	25/6.3										
VOLTS	460										
AMP	32/12										
RPM	1760/870										
FRAME	284T				HZ	60		PH	3		
SER.F.	1.15			CODE	F		DES	B		CL	F
NEMA-NOM-EFF					PF						
RATING	40C AMB-CONT										
CC									USABLE AT 208V		
DE	6311				ODE	6311					
ENCL	TEFC			SN							

Nameplate NP0090E

FRONT 6311

PULLEY 6311

LUBRICATE WITH

GREASE POLYREX EM

Parts List		
Part Number	Description	Quantity
SA286544	SA 10H161W442G1	1.000 EA
RA272776	RA 10H161W442G1	1.000 EA
10CB1000A09P	CONDUIT BOX, MACH W/EPOXY PRIMER	1.000 EA
09GS1010	GASKET, DWG, LEADWIRE SEPERATOR	1.000 EA
10XN3118K16	5/16-18 X 1' GRADE #5, STL, ZINC PLATE	4.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 EA
WD1000B16	T&B CX70TN TERMINAL	1.000 EA
10XN2520K06	1/4-20 X 3/8" HX HD SCREWGRADE 5, ZINC P	1.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	1.000 EA
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
HA4017A11	1/8 X 2.75 GREASE EXT (F/S)	1.000 EA
HA4017A03	.125 X 1.75 GREASE EXT (F/S)	1.000 EA
HW4019A01	PIPE COUPLING 1/8 NPT,STEEL,ZINC COATING	1.000 EA
HW4600A49	CR #20643 SINGLE LIP SEAL	1.000 EA
HW4600B40	V-RING SLINGER 2.000 X 2.680 X .28 VITON	1.000 EA
HW5100A13	W4627-047 WVY WSHER	1.000 EA
10XN3118K40	5/16-18 X 2.50" HEX HD, GRADE 5	4.000 EA
10EP1105A20P	MACH'D EPOXY PRIMED EP W/SEAL	1.000 EA
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
10XN3118K40	5/16-18 X 2.50" HEX HD, GRADE 5	4.000 EA
HW4600B40	V-RING SLINGER 2.000 X 2.680 X .28 VITON	1.000 EA
HW4600A49	CR #20643 SINGLE LIP SEAL	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
10FH1007P	FAN COVER, CAST W/EPOXY PRIMER	1.000 EA
10XN3118K20	5/16-18 X 1 1/4 GRADE 5 STEEL ZC PLATED	3.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	3.000 EA
10CB1503A01P	CONDUIT BOX LIPPED LID, MACH W/EPXY PRMR	1.000 EA
14GS1003	GASKET CONDUIT BOX LID, NEOP	1.000 EA
10XN2520K16	1/4-20 X 1" HX HD SCRW GRADE 5, ZINC P	4.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
HW2501H29	KEY, 1/2 SQ X 3.375	1.000 EA
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.031 QT
MJ5001A14	DYNAPRO SEAL, CP MOTORS VC#2508050 (603	0.033 EA
MJ5002A01	SILICON RUBBER SEALANT, 732CL 10.3 OZ TU	0.025 EA
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
LB1002N	LABEL,MARINE DUTY (ON ROLLS)	1.000 EA
10EP1110A34GP6	FREP, MACH W/PRIMER & GREEN PAINT	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
HW4500A21	1618BALEMITE FITTING 825 UNIVERSAL	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HA4001A01SP	DRAIN PLUG, PLASTIC (MICRO PLAS)	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.130 LB
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HA4001A01SP	DRAIN PLUG, PLASTIC (MICRO PLAS)	1.000 EA
09FN3001A02SP	EXTERNAL FAN, PLASTIC KENCO	1.000 EA

Product Information Packet: CTM1763T - 25/6.3HP,1760/870RPM,3PH,60HZ,284T,1040M

HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 EA
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 EA
MG1025N19	WILKOFASST, 778.50, RELIANCE BLUE-GREEN	0.070 GA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0032	CONNECTION LABEL	1.000 EA
NP1258E	SS CP UL CSA CC	1.000 EA
NP0090E	SS NO LOGO'S BEARING & GREASE DATA	1.000 EA
10PA1000	PACKAGING GROUP COMBINED PRINT PK1023A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Record # 36424 - Typical performance - not guaranteed values


Winding: 10WGW442-R003	Type: 1040M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: High Speed Connection	
Rated Output (HP)	25/6.3			Full Load Torque	73.6 LB-FT
Volts	460			Start Configuration	direct on line
Full Load Amps	32/12			Breakdown Torque	164 LB-FT
R.P.M.	1760/870			Pull-up Torque	98 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	132 LB-FT
NEMA Design Code	B	KVA Code	F	Starting Current	175 A
Service Factor (S.F.)	1.15			No-load Current	14.6 A
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	0.436 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	89°C
S.F. Amps				Temp. Rise @ S.F. Load	108°C

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	64	74	80	81	81	81
Efficiency	77	85	87	88	87	86	87.4
Speed	1793	1787	1780	1772	1762	1750	1766
Line amperes	16.7	21.2	26.7	32.6	41.1	50	37.7

Performance Graph at 460V, 60Hz, 25.0HP Typical performance - Not guaranteed values

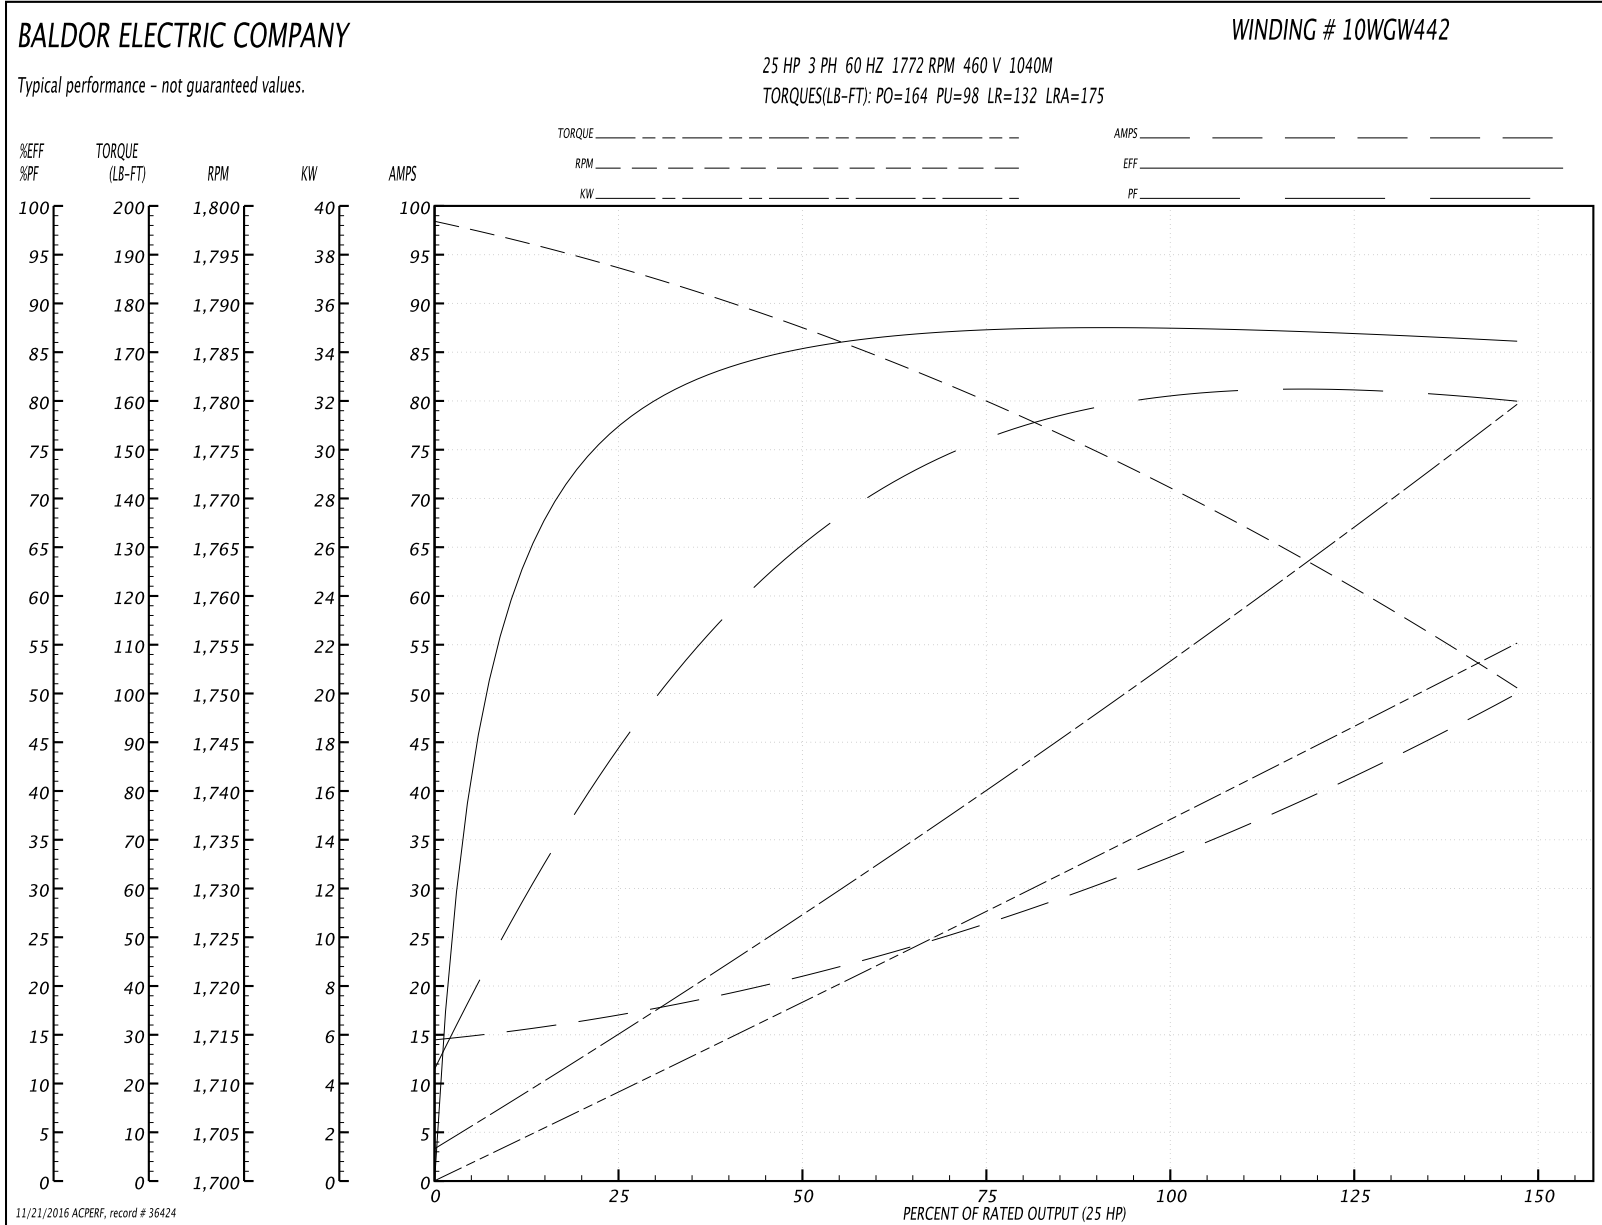

AC Induction Motor Performance Data

Record # 36425 - Typical performance - not guaranteed values


Winding: 10WGW442-R003	Type: 1040M	Enclosure: TEFC
-------------------------------	--------------------	------------------------


Nameplate Data				460 V, 60 Hz: Low Speed Connection	
Rated Output (HP)	25/6.3			Full Load Torque	37.6 LB-FT
Volts	460			Start Configuration	direct on line
Full Load Amps	32/12			Breakdown Torque	72 LB-FT
R.P.M.	1760/870			Pull-up Torque	41 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	55 LB-FT
NEMA Design Code	B	KVA Code	F	Starting Current	45 A
Service Factor (S.F.)	1.15			No-load Current	7.7 A
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	1.73 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	40°C
S.F. Amps				Temp. Rise @ S.F. Load	48°C

Load Characteristics 460 V, 60 Hz, 6.3 HP



% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	26	41	50	57	62	63	60
Efficiency	72	81	84	85.2	84	83	84.5
Speed	896	894	891	887	883	876	885
Line amperes	8.1	9	10.4	12	14.2	17.3	13.3

Performance Graph at 460V, 60Hz, 6.3HP Typical performance - Not guaranteed values

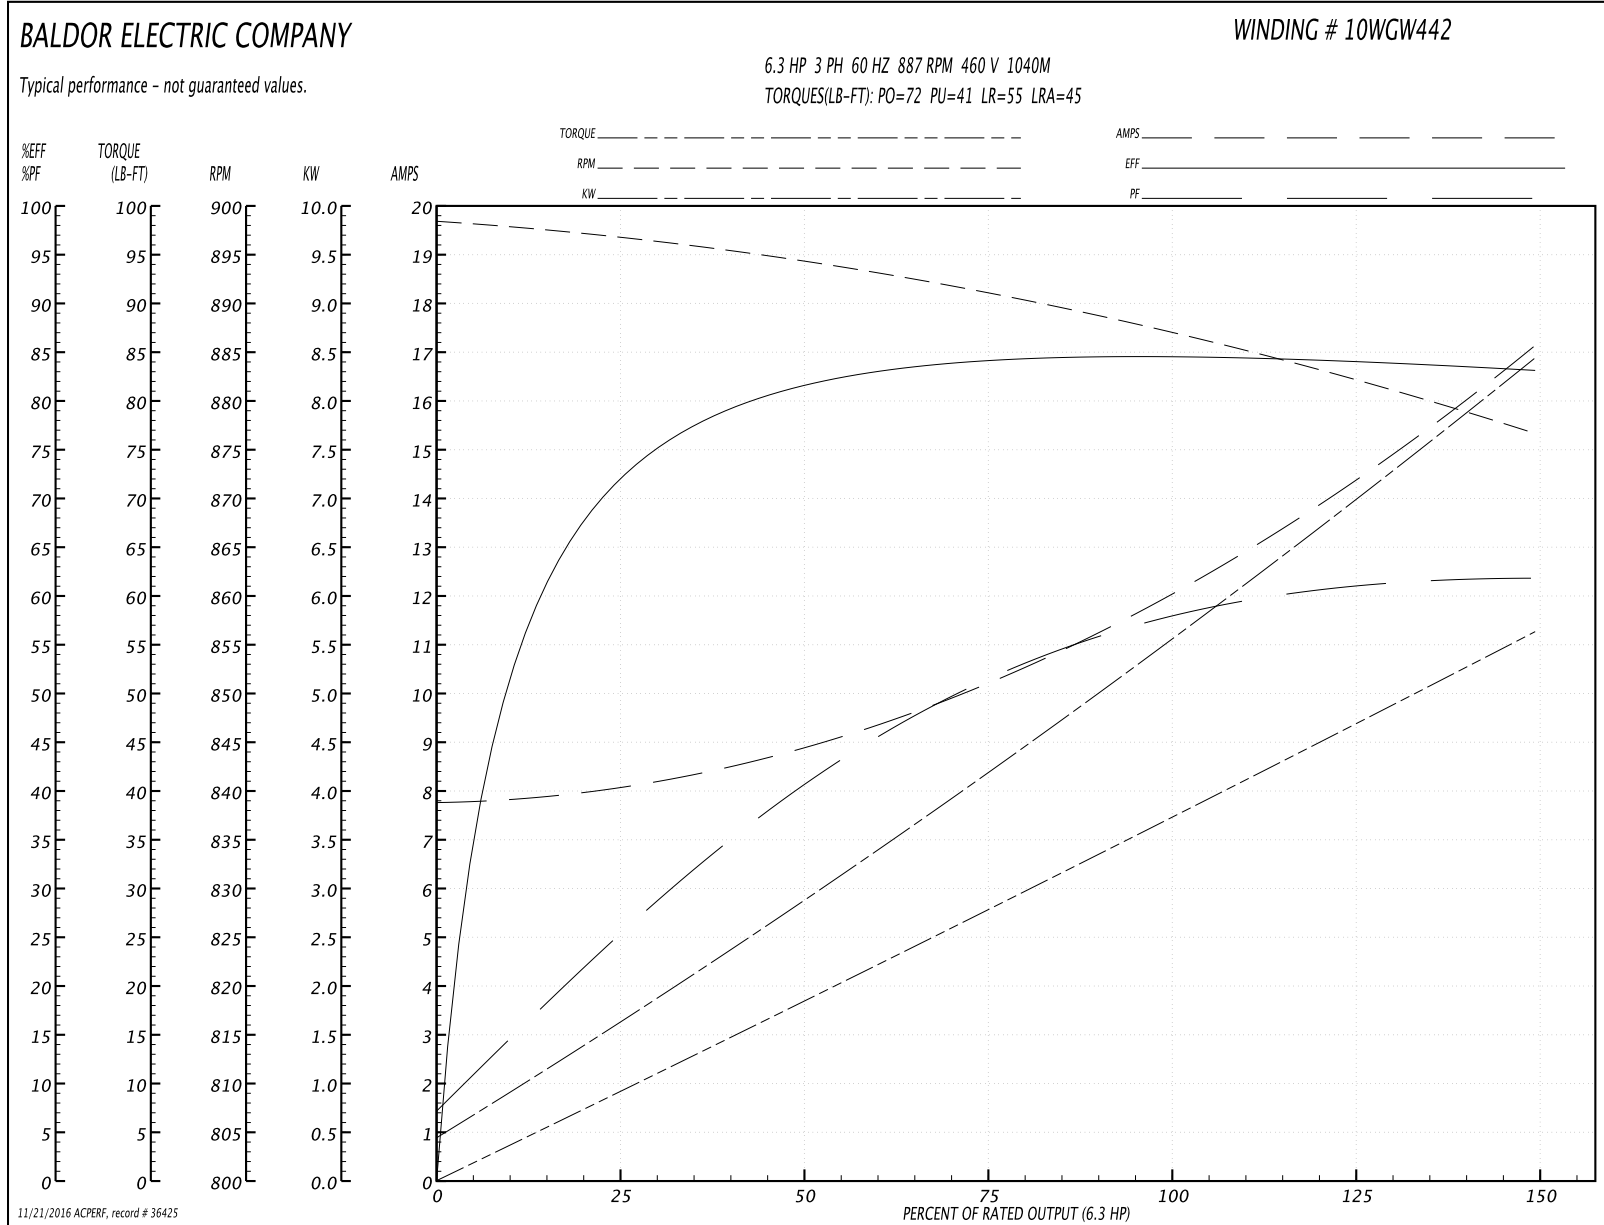

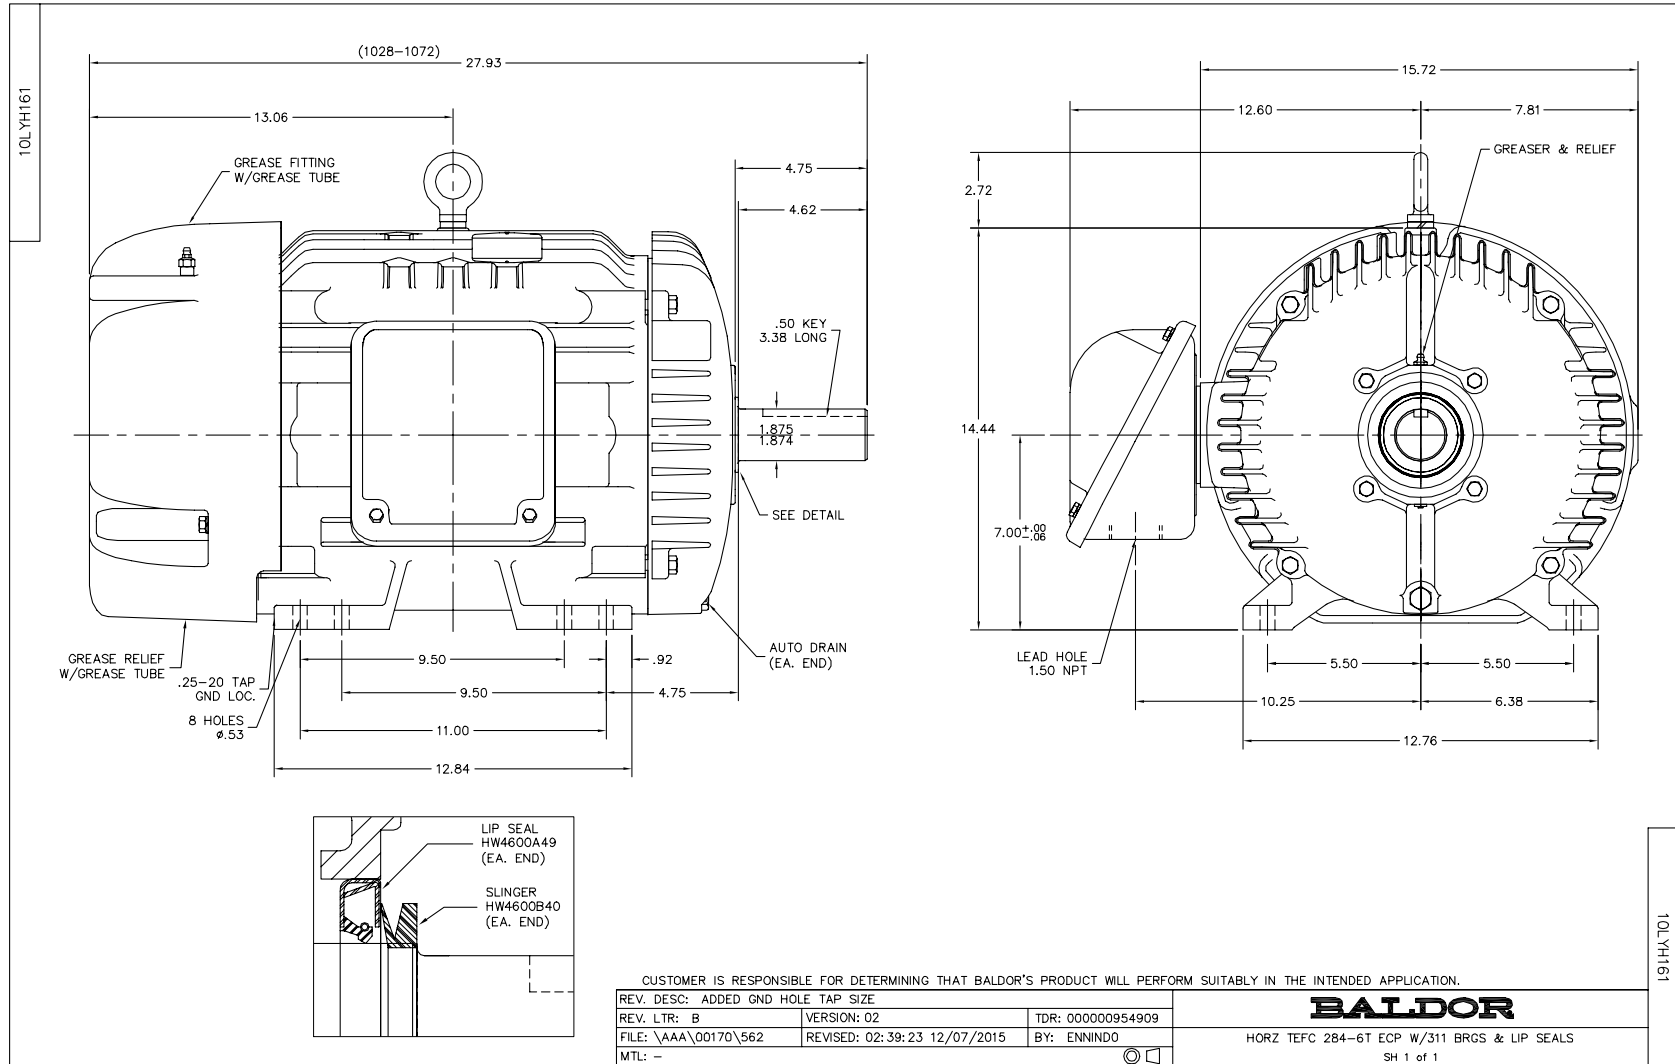

CD0032

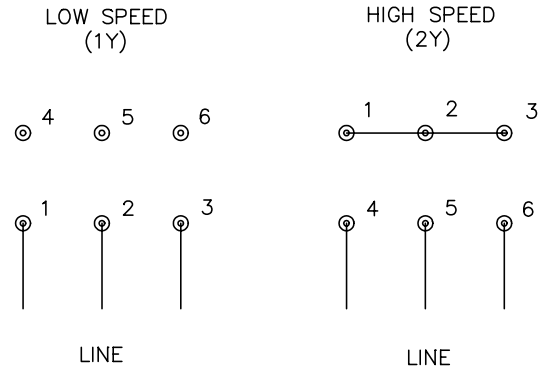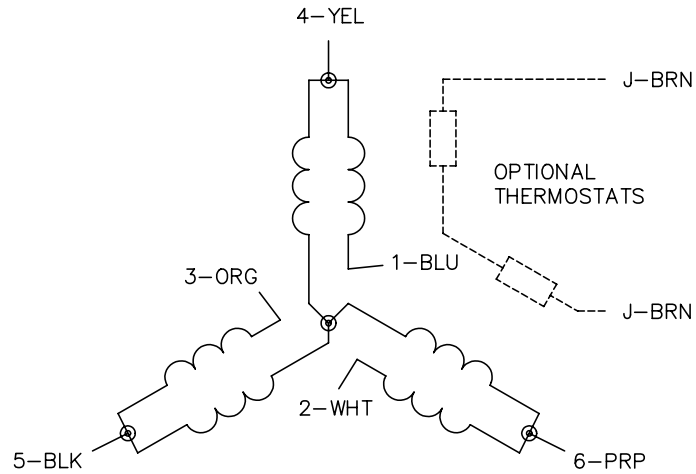

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/22/99 8:27	TDR: 0171435
CD0032		FILE: AAA00005145	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, 2-SPEED 1-WINDING VARIABLE TORQUE

CD0032