


MYERS® MSK SEWAGE SERIES SUBMERSIBLE SEWAGE EJECTOR PUMPS


Pump Characteristics

Pump/Motor Unit			Submersible						
MSK50 Manual Models			M1			M2			
MSK50 Automatic Models			A1			-			
Horsepower			1/2						
Full Load Amps			12.0			6.0			
Motor Type			Split Phase w/ Thermal Overload Protection						
Temperature			130° F Ambient						
Weight			54 lbs.						
MSK60 Manual Models			M1	M7	M2	M6	M3	M4	M5
MSK60 Automatic Models			A1	-	A2	-	-	-	-
Horsepower			6/10						
Full Load Amps			12	6.9	6.0	3.0	2.5	1.3	1.04
Temperature			130° F Ambient						
Weight			56 lbs.						
MSK75 Manual Models			-	M7	M2	M6	M3	M4	M5
Horsepower			3/4						
Full Load Amps			-	10.4	9.0	4.0	3.5	1.8	1.44
Temperature			140° F Ambient						
Weight			76 lbs.						
MSK100 Manual Models			-	M7	M2	M6	M3	M4	M5
Horsepower			1						
Full Load Amps			-	11.5	10.0	5.0	4.4	2.2	1.7
Temperature			140° F Ambient						
Weight			78 lbs.						
Motor Type			Split Phase			Three-Phase			
R.P.M.			1750						
Phase			1			3			
Voltage			115	200	230	200	230	460	575
Hertz			60						
Operation			Intermittent						
NEMA Design			A						
Insulation			Class A						
Discharge Size			2" NPT std. [3" opt.]						
Solids Handling			2"						
Power Cord	MSK50	115V	16/3, SJTW, 10', 10' std. [20' opt.]						
		230V	16/3, SJTW, 10', 10' std. [20' opt.]						
	MSK60	115V	16/3, SJTW, 10', 10' std. [20' opt.]						
		200V/230V	16/3, SJTW, 10', 20' std.						
	MSK75/MSK100	30	16/4, STWA, 20' std.						
			16/3, STWA, 10', 20' std. 16/4, STWA, 30', 20' std.						

Performance Data

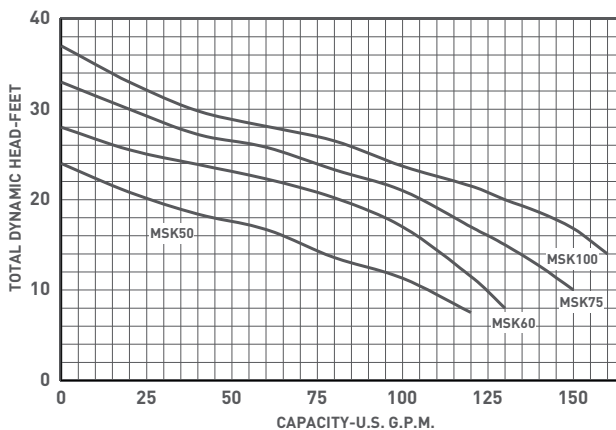

Dimensional Data

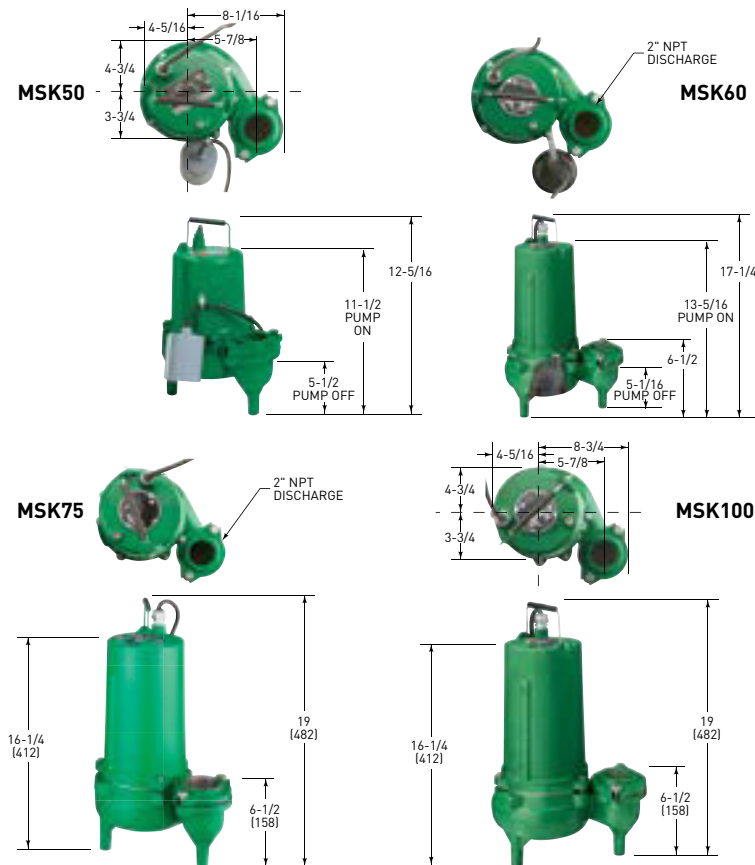

Materials of Construction

Handle	Steel
Lubricating Oil	Dielectric Oil
Motor Housing	Cast Iron
Pump Casing	Cast Iron
Shaft	Stainless Steel
Mechanical Shaft Seal	Seal Faces: Carbon/Ceramic Spring: Stainless Steel Bellows: Buna-N
Impeller	Cast Iron
Upper Bearing	Single Row Ball Bearing
Lower Bearing	Single Row Ball Bearing
Fasteners	Stainless Steel

All dimensions in inches. Metric for international use. Component dimensions may vary $\pm 1/8$ inch. Dimensional data not for construction purpose unless certified. Dimensions and weights are approximate. On/Off level adjustable.



USA
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM
PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA
490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO, N1T 0A5
PH: 519-896-2163 ORDERS FAX: 519-896-6337

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.