

# **BALDOR**® • **RELIANCE**

## **Product Information Packet**

# **EM2560T-4**

**150HP, 1190RPM, 3PH, 60HZ, 445T, 1896M, OPEN**

Part Detail							
Revision:	J	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	A44072M	Elec. Spec:	A44WG0914	CD Diagram:	416820-008
Enclosure:	DP	Mfg Plant:		Mech. Spec:		Layout:	617428-042
Frame:	445T	Mounting:	F1	Poles:	06	Created Date:	10-19-2010
Base:		Rotation:	R	Insulation:	F	Eff. Date:	09-26-2016
Leads:	6#2					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP2377L									
CAT.NO.	EM2560T-4	SPEC NO.	P44G1780						
HP	150	AMPS	175	VOLTS	460	DESIGN	B		
FRAME	445T	RPM	1185	HZ	60	AMB	40	SF	1.15
DRIVE END BEARING	90BC03J30X	PHASE	3	DUTY	CONT	INSUL.CLASS	F		
OPP D.E. BEARING	90BC03J30X	TYPE	P	ENCL	DP	CODE	G		
SER.NO.		POWER FACTOR	84	NEMA-NOM-EFFICIENCY	95.4				
		MAX CORR KVAR	35.0	GUARANTEED EFFICIENCY	95.0				
		NEMA NOM/CSA QUOTED EFF							
		MOTOR WEIGHT	1572						

Parts List		
Part Number	Description	Quantity
SA209188	SA P44G1780	1.000 EA
RA196450	RA P44G1780	1.000 EA
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 EA
000692000VD	LABEL WARNING	1.000 EA
NP2377L	SS SUPER-E CC CSA-C US CSA-EEV (LASER)	1.000 EA
421948044	LABEL, MYLAR	1.000 EA
004824015A	GREASE POLYREX EM	1.156 LB
032018005AK	HHCS 1/4-20X5/8 PLATED	4.000 EA
032018028EK	HHCS 5/8-11X3-1/2L PLTD	4.000 EA
032018036DK	HHCS 1/2-13X4-1/2 PLTD.	3.000 EA
034000012AB	WSHR 1/4 STD. PLATED	4.000 EA
034017012AB	LCKW 1/4 STD. PLATED	4.000 EA
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 EA
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 EA
089439051A	BRKT 440 089439051WCB	1.000 EA
089439051A	BRKT 440 089439051WCB	1.000 EA
415045002A	SLGR	1.000 EA
702611001A	BAFFL 440 SUB PAINT	1.000 EA
032018005AK	HHCS 1/4-20X5/8 PLATED	4.000 EA
032018028EK	HHCS 5/8-11X3-1/2L PLTD	4.000 EA
032018036DK	HHCS 1/2-13X4-1/2 PLTD.	3.000 EA
034000012AB	WSHR 1/4 STD. PLATED	4.000 EA
034017012AB	LCKW 1/4 STD. PLATED	4.000 EA
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 EA

<b>Parts List (continued)</b>		
<b>Part Number</b>	<b>Description</b>	<b>Quantity</b>
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 EA
410700004A	WSHR	1.000 EA
702611001A	BAFFL 440 SUB PAINT	1.000 EA
032018008BK	HHCS 5/16-18X1L PLATED	4.000 EA
032018008DK	HHCS 1/2-13X1 PLATED	4.000 EA
033512006LB	HHTTS 1/4-20X3/4 PLTD.	1.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
048897010DJ	BUSH - 445	1.000 EA
048977006J	GRFTG - 440	1.000 EA
067053001C	GASK 440	1.000 EA
076863000C	+CBCST BLKT - 440	1.000 EA
076864000A	CB CVRCST BLKT - 440	1.000 EA
406056007A	GASKET, 440	1.000 EA
415000103D	T/LUG #4AWG-1/0AWG W/HOLE FOR .250 BOLT	1.000 EA
418150003A	GREASE FITTING CAP	1.000 EA
418150003A	GREASE FITTING CAP	1.000 EA
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.250 GA
033775004EA	DRSCR #6-1/4 304 S.S.	2.000 EA
034180054KA	KEY 7/8X7/8X6-3/4 L	1.000 EA
PK5004A09	BASE 48 X 39-1/4 STACK 2 X 4 RUUNER	1.000 EA

REL. S.O.	FRAME	HP	TYPE	PHASE/HERTZ	RPM	VOLTS
	445T	150	P	3/60	1185	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
175	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C (BETWEEN LINES)		
599851	418143-81-AE	---	---	.0355		

PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER FACTOR %	EFFICIENCY %	
NO LOAD	0	66.0	1200	3.58	0	
1/4	37.6	77.8	1197	48.6	93.0	
2/4	75.0	104	1194	71.0	95.4	
3/4	112	137	1190	80.3	95.6	
4/4	150	175	1187	84.1	95.4	
5/4	188	217	1183	85.5	94.8	


SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	166	1104	1070		
PULL UP	453	158	1049	965		
BREAKDOWN	1134	253	1679	609		
FULL LOAD	1187	100	664	175		

AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE

REMARKS: TYPICAL DATA  
 XE MOTOR-TYPICAL DATA-NEMA NOM. EFF. 95.4 PCT.  
 GUARANTEED MIN. EFF. 95.0 PCT.

<b>BALDOR</b>	DR. BY T.G.KEALTI	<b>A-C MOTOR</b>
	CK. BY J.J.HARRISON	
	APP. BY T.G.KEALTI	
DATE 06/08/10	<b>PERFORMANCE DATA</b>	ISSUE DATE 12/17/10

REL. S.O. \_\_\_\_\_ RPM 1185 S.F. 1.15 ROTOR 418143-81-AE  
 FRAME 445T VOLTS 460 NEMA DESIGN B TEST S.O. TYPICAL DATA  
 HP 150 AMPS 175 DUTY CONT ENCLOSURE TFFC TEST DATE ---  
 TYPE P AMB C/INSUL 40/F E/S 599851 STATOR RES. @ 25 °C .0355  
 PHASE/HERTZ 3/60 OHMS (BETWEEN LINES)

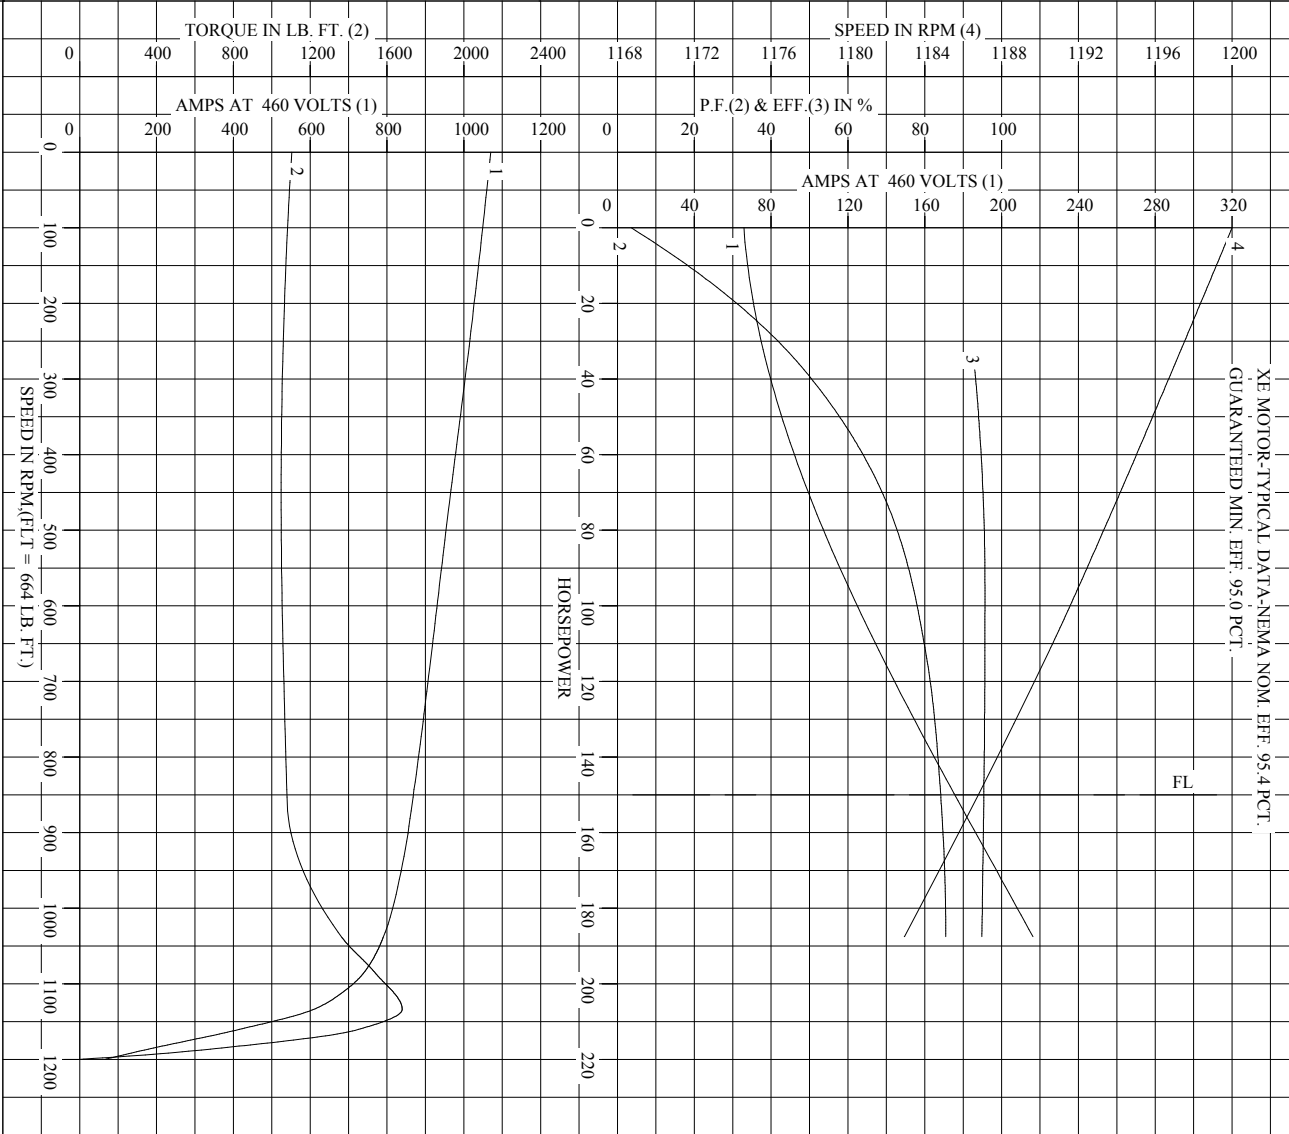


AMPERES SHOWN FOR \_\_\_\_\_ 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

**BALDOR**  
 DR. BY T.G. KEATTI  
 CK. BY J.H. HARRISON  
 APP. BY T.G. KEATTI  
 DATE 06/08/10

**A-C MOTOR PERFORMANCE CURVES**  
 A44W/G0914-R001  
 ISSUE DATE 12/17/10

Printed on 12/17/10 12:41 @ psecs-motorengr


RET. S.O. \_\_\_\_\_ RPM 1185 S.F. 1.15 ROTOR 418143-81-AE  
 FRAME 445T VOLTS 460 NEMA DESIGN B TEST S.O. TYPICAL DATA  
 HP 150 AMPS 175 CODE LETTER G TEST DATE ---  
 TYPE P DUTY CONT ENCLOSURE TEFEC STATOR RES. @ 25 °C. 0355  
 PHASE/HERTZ 3/60 AMB °C/INSUL 40/F E/S 599851 OHMS (BETWEEN LINES)

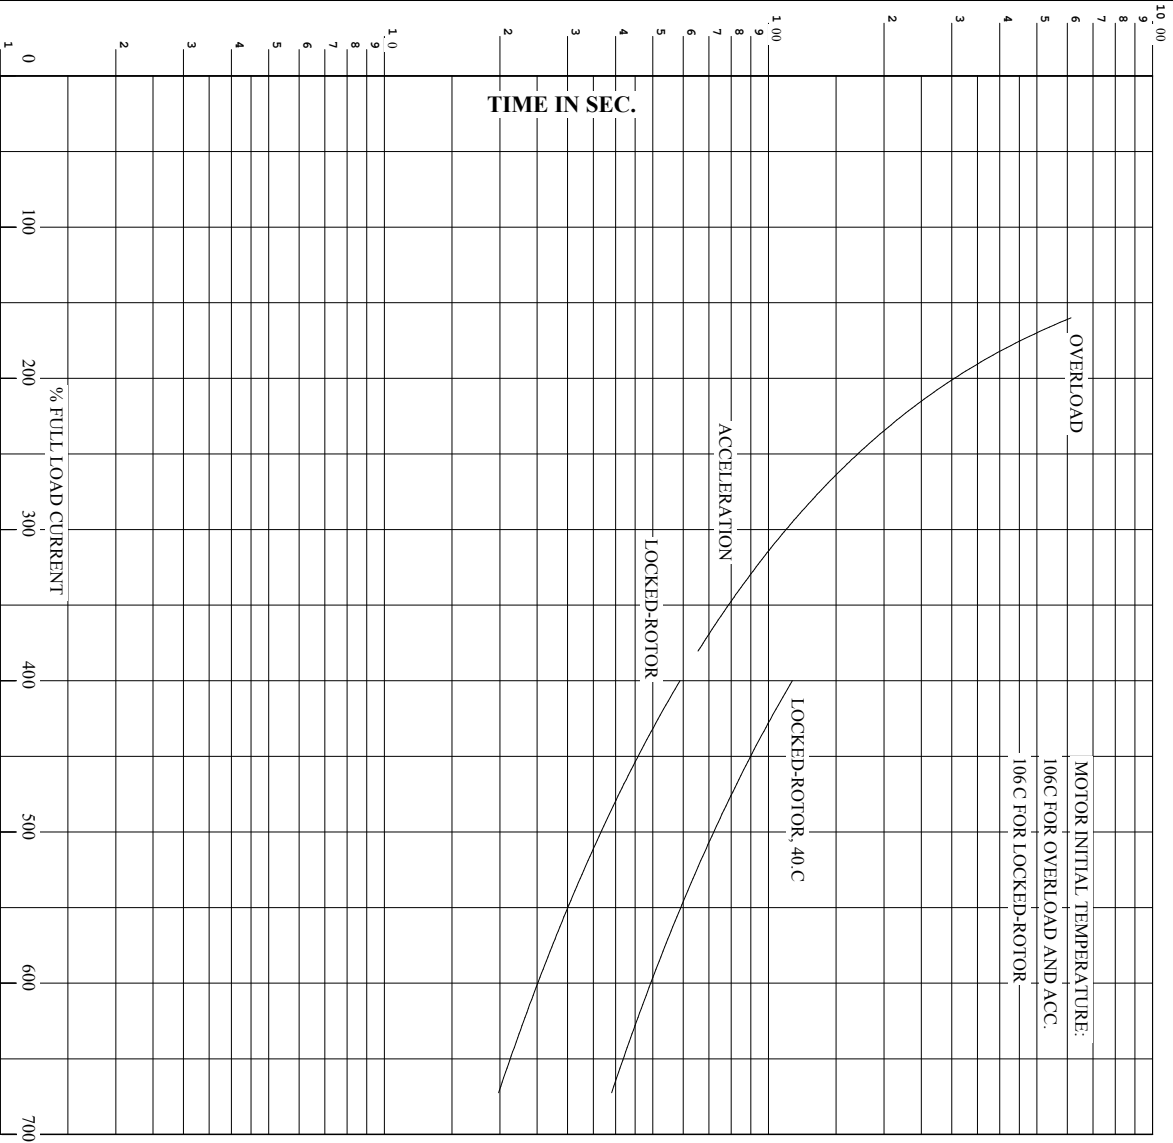

REMARKS: THERMAL LIMIT CURVE  
 XE MOTOR-TYPICAL DATA-NEMA NOM. EFF. 95.4 PCT.  
 GUARANTEED MIN. EFF. 95.0 PCT.

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

<b>BALDOR</b>	DR. BY	TKGHATI	<b>A-C MOTOR</b>
	CK. BY	JHARRISON	
	APP. BY	TKGHATI	<b>PERFORMANCE</b>
	DATE	060810	<b>CURVES</b>
			A44WG0914-R001
			ISSUE DATE 12/17/10



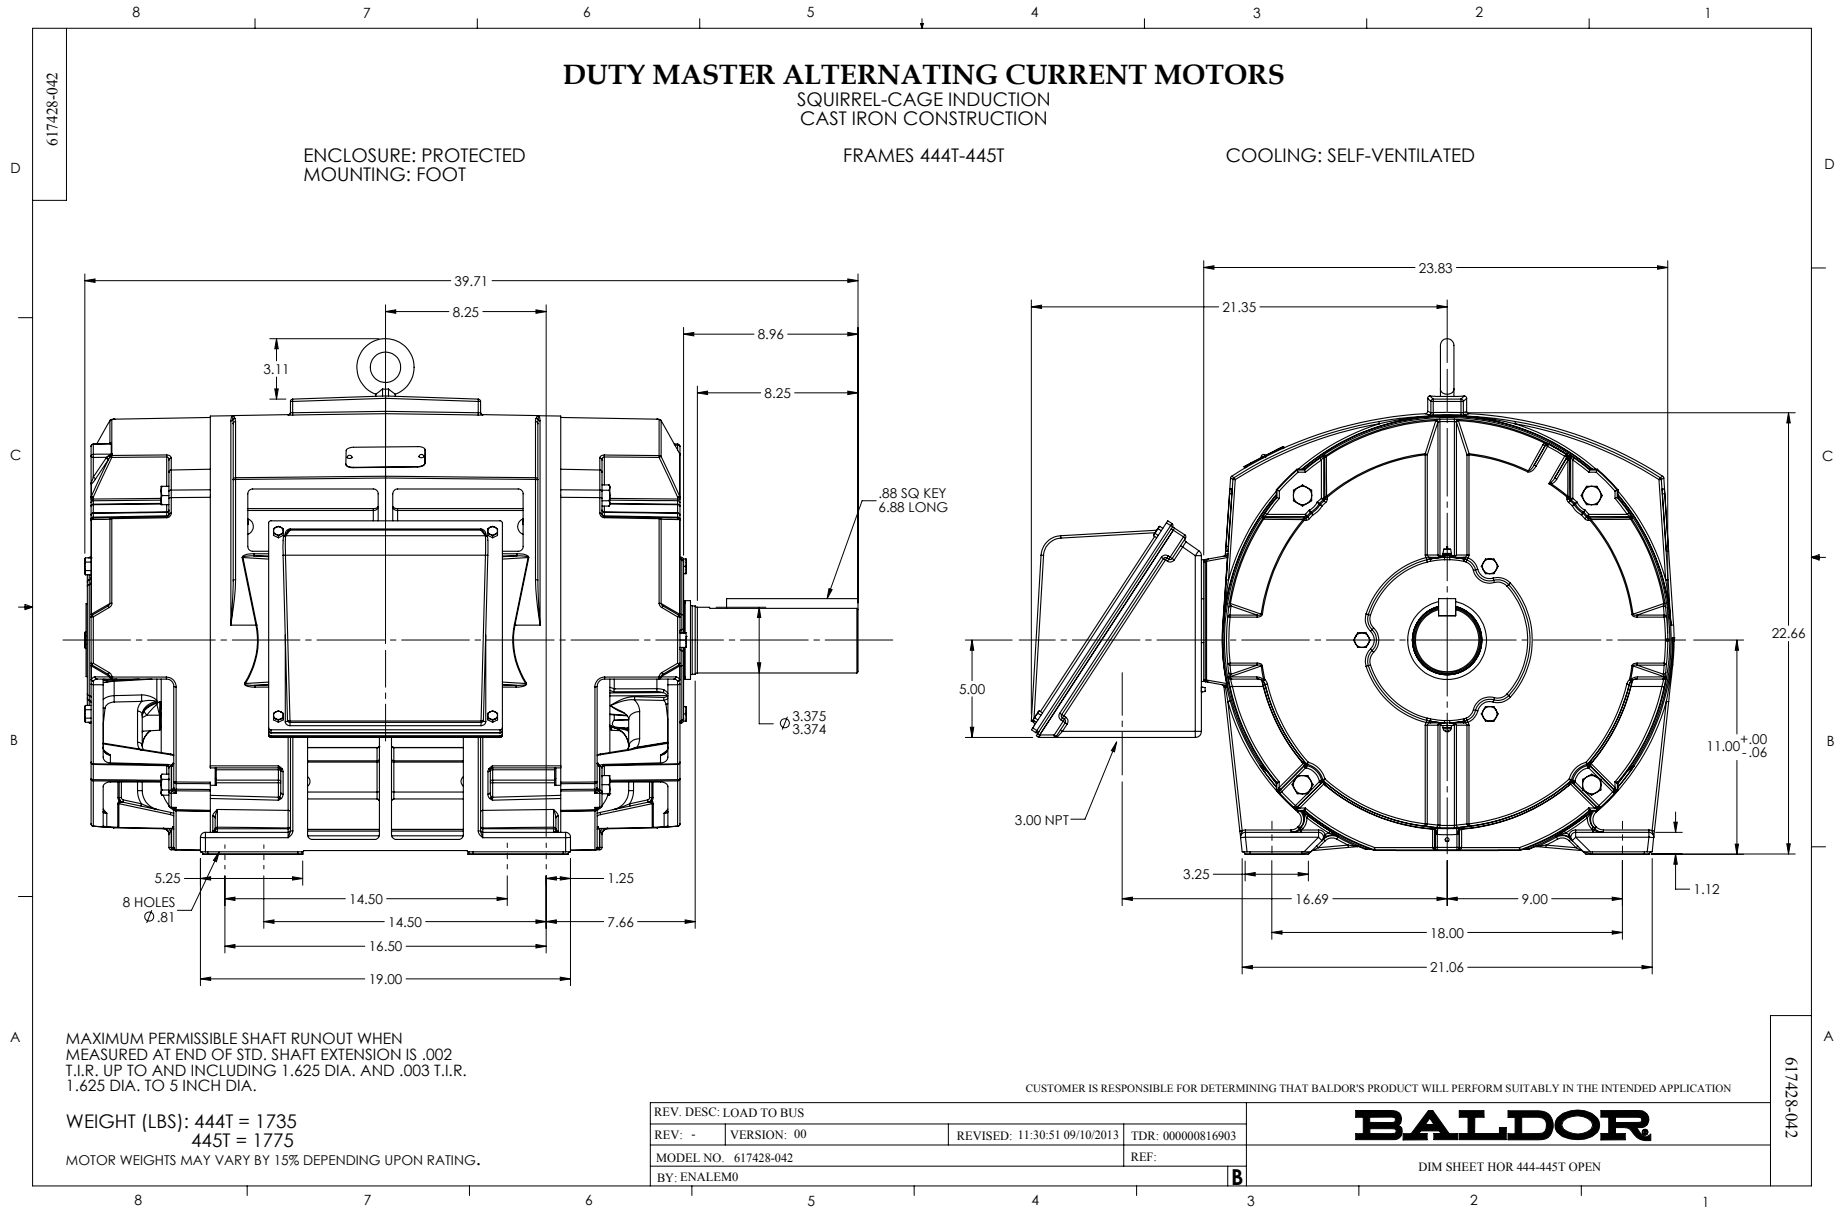


416820-008

# A-C MOTOR CONNECTION DIAGRAM

STANDARD 6 LEAD

Y START - DELTA RUN

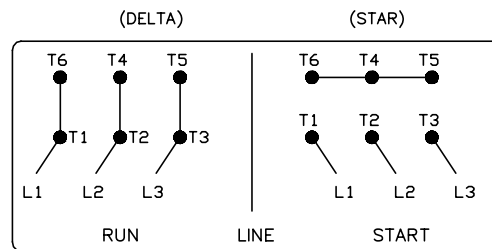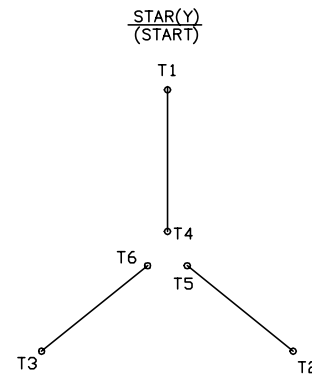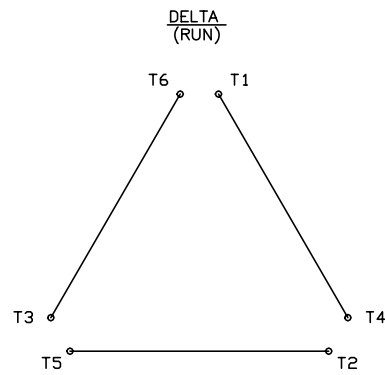

< N. P. 1767-DC >

416820-008

REV. DESC: ADDED T4 TO Y CONNECT DIAGRAM		
REV. LTR: D	VERSION: 04	TDR: 000000847713
FILE: \RAG\00001\808	REVISED: 10: 41: 26 04/08/2014	BY: RAGJSS1
MTL: -	⊙ □	



CONNECT DIAGRAM STD 6 LEAD Y START DELTA RUN

SH 1 of 1

Marketing maintained PDF of MN408:

<http://www.baldor.com/support/Literature/Load.ashx/MN408?ManNumber=MN408>

Marketing maintained PDF of MN416:

<http://www.baldor.com/support/Literature/Load.ashx/MN416?ManNumber=MN416>