

 INDUSTRIAL FLOW SOLUTIONS™	TECHNICAL DATA			BJM Pumps® KZN110HRF		
	Dwg:	DS-C18-015	Rev:	1	Date:	8/28/2025

GENERAL DATA

MAX. FLOW:	820 GPM (3104 L/min)
MAX. HEAD:	88' (26.8m)
MAX. SUBMERSION DEPTH:	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	HIGH TEMPERATURE SLURRY HANDLING, TOP DISCHARGE
MINIMUM SUBMERSION DEPTH: FOR CONT. DUTY ¹	43.31" (1100 mm)
PUMP DOWN WATER LEVEL:	16" (406 mm)
SOLID SIZE:	1.38" (34.9 mm)
STRAINER OPENING:	1.38" (34.9 mm)
IMPELLER DIAMETER:	11.62" (295 mm)
DISCHARGE SIZE	4" NPT-MALE
PUMP WEIGHT (without cable):	582 lbs (264.1 kg)
SHIPPING WEIGHT:	687 lbs (311.4 kg)

CONSTRUCTION / MATERIAL DATA

DUAL MECHANICAL SEAL	SILICON CARBIDE/ SILICONE CARBIDE, FKM
MOTOR HOUSING	CAST IRON
PUMP VOLUTE	DUCTILE IRON WITH INTERIOR HARDNESS COATING TO 1180 DPH(Rc 71)
WEAR PLATE	HI-CHROME
AGITATOR	HI-CHROME
IMPELLER	HI-CHROME
STRAINER/STAND	STEEL
LIP SEAL & O-RINGS	FKM
ROTOR SHAFT	410 SS
EXTERNAL HARDWARE	304 SS
BALL BEARING: OIL LUBRICATED UPPER	6306
BALL BEARING: OIL LUBRICATED LOWER	6310

ELECTRICAL / MOTOR DATA

MOTOR: HP, TYPE, RATING	15, SUBMERSIBLE OIL FILLED, (CONT. DUTY ¹)	
MOTOR RPM	1750	
MOTOR INSULATION CLASS	R, 428°F (220°C)	
MOTOR SERVICE FACTOR	1.15	
VOLTAGE - 60Hz	460V	575V
CURRENT F.L.A.	17.5	13.7
LOCKED ROTOR CURRENT (LRA)	110	85
POWER CABLE: GAUGE-LENGTH	AWG 8/4, 50' (15m) HIGH TEMP RATED CABLE	
SENSOR CABLE: ² GAUGE-LENGTH	AWG 18/4, 50' (15m) HIGH TEMP RATED CABLE	
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)	
SEAL LEAK DETECTOR ²	Seal Minder® MOISTURE SENSING PROBE	
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)	

1 - Continuous duty motor - see minimum submersion depth above

2 - Requires a seal fail and thermal circuit in control panel for warranty validity

©2025 Industrial Flow Solutions Operating, LLC. All rights reserved.

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

(860) 631-3618 • www.flowsolutions.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL
FLOW
SOLUTIONS™

PERFORMANCE CURVE

BJM Pumps® KZN110HRF

Dwg:




DS-C18-008

Rev:

1

Date:

6/12/2025

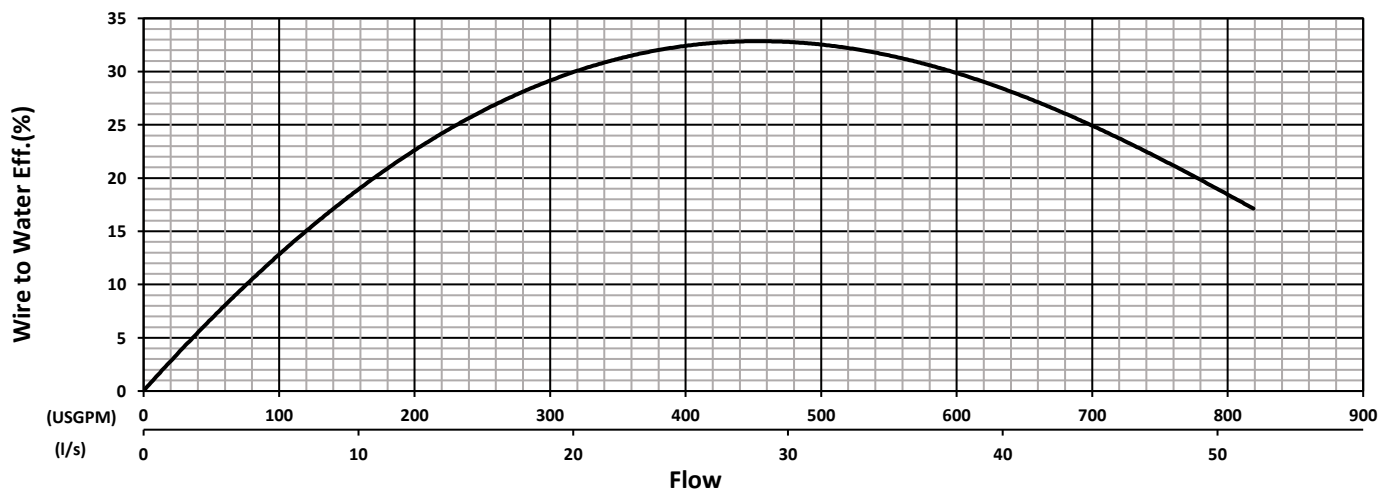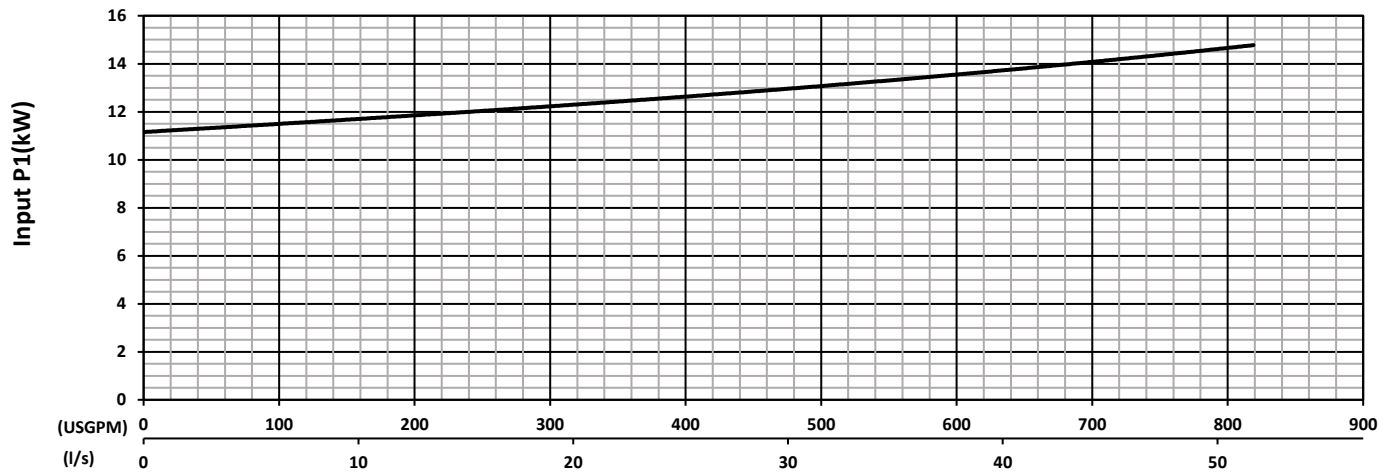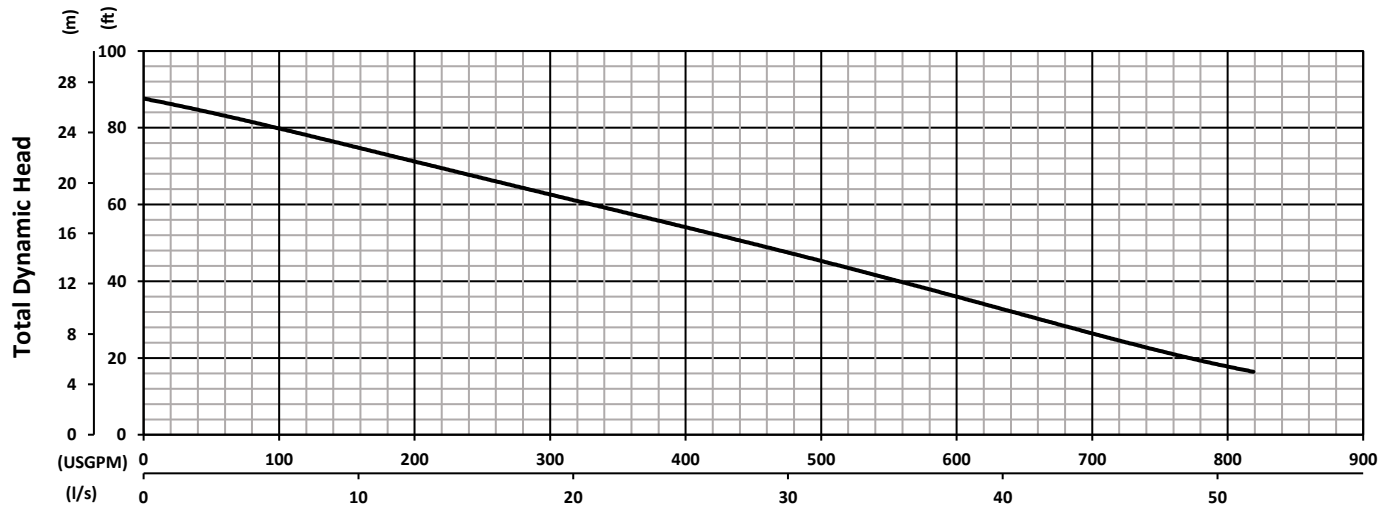

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

110HRF - Dual Units

Frequency 60 Hz
Pump Speed 1750 RPM
Impeller 295mm

Specifications subject to change without notice