

PENTEK® XE Series™ Motors

Stainless steel



Introducing the new Pentek® XE Series™ 4" submersible high-thrust motors. Built with the latest design, manufacturing and testing technology, they feature laser-welded 304L stainless steel construction, higher thrust capacities and higher efficiencies. The Pentek XE Series submersible motors incorporate “encapsulated, epoxy stator design,” and professional-grade Class F insulation provides longer life in harsh environments. Each motor is 100% factory pressure and run tested to support our quality standards.

APPLICATIONS

Water systems...for residential, industrial, commercial, multiple housing and farm clean water use.

SPECIFICATIONS

End Bell: 304 stainless steel

Shell: 304 stainless steel

Motor Shaft: 17-4 precipitation hardened stainless steel

Insulation: Class F, 311°F (155°C)

Max. Water Temp: 86°F (30°C)

Fasteners: 304 stainless steel

Sand Boot: Nitrile

Cable: Field-serviceable, Controlled Compression Design, UL and CSA Approved

Cable Length: 48"

Diaphragm: EPDM

Thrust Bearings: Kingsbury-type, pivot shoe, carbon graphite mating ring

Thrust Load Capacity: 700 lbs.

FEATURES

700# Rated Kingsbury Thrust Bearing Design: Large high-performance bearings are standard on all HPs allowing for higher thrust loads, providing many years of trouble-free service under severe-duty operation.

2-Wire Permanent Split Capacitor: Design insures quiet operation and improved operating efficiency.

3-Wire Motors: Operate with Pentek SMC and other single-phase motor controls.

All Stainless Steel Exterior

Professional-Grade Class F-Compliant Motor Insulation: Allows for longer service life.

UL, CSA Approved and NSF/ANSI 61 Certified

100% Factory Pressure and Run Tested

Equipped with Surge Arrestor

Automatic Thermal Protection on 1/2 – 1 HP Models

PENTEK® XE Series™ Motors

Stainless steel

ORDERING INFORMATION


RATING				SERVICE FACTOR	CATALOG NUMBER	FULL LOAD AMPS	MAX. LOAD (SF LOAD) AMPS	LOCKED ROTOR AMPS	WINDING		THRUST RATING	LENGTH		WEIGHT				
HP	KW	VOLTS	HZ						MAIN RESISTANCE	START RESISTANCE		IN.	MM	LB.	KG			
PERMANENT SPLIT CAPACITOR (PSC) 2 WIRE																		
1/2	0.37	115	60	1.6	P42B0005A1	7.4	9.5	36.4	1.3-1.8	700	11.0	279	19.2	8.7				
		230		1.6	P42B0005A2	3.7	4.7	19.5	4.5-5.2		11.0	279	19.2	8.7				
3/4	0.55	230	1.5	P42B0007A2	5.0	6.4	24.8	3.0-4.8	12.4		314	22.7	10.3					
1	0.75	230	1.4	P42B0010A2	7.9	9.1	21.7	4.2-5.2	13.0		337	24.5	11.1					
1-1/2	1.1	230	60	1.3	P42B0015A2	9.2	11.0	42.0	1.9-2.3		14.9	378	28.9	13.1				
				1.6	P42B0020A2	11.0	12.6	49.6	0.9-1.6		5.7-7.0	10.0	253	18.9	8.6			
CAPACITOR START/INDUCTION RUN (CSIR) 3 WIRE																		
1/2	0.37	115	60	1.6	P43B0005A1	11.0	12.6	49.6	0.9-1.6	5.7-7.0	700	10.0	253	18.9	8.6			
		230		1.6	P43B0005A2	5.5	6.3	22.3	4.2-4.9	17.4-18.7		9.7	246	18.1	8.2			
3/4	0.55	230	1.5	P43B0007A2	7.2	8.3	32.0	2.6-3.6	11.8-13.0	10.8		275	21.4	9.7				
1	0.75	230	1.4	P43B0010A2	8.4	9.7	41.2	2.2-3.2	11.3-12.3	11.7		297	23.1	10.5				
CAPICITOR START/CAPACITOR RUN (CSCR) 3 WIRE																		
1/2	0.37	230	60	1.6	P43B0005A2	4.1	4.9	22.3	4.2-4.9	17.4-18.7		700	9.7	246	18.1	8.2		
3/4	0.55			1.5	P43B0007A2	5.1	6.3	32.0	2.6-3.6	11.8-13.0	10.8		275	21.4	9.7			
1	0.75			1.4	P43B0010A2	6.1	7.2	41.2	2.2-3.2	11.3-12.3	11.7		297	23.1	10.5			
1-1/2	1.1			1.3	P43B0015A2	9.7	11.1	47.8	1.6-2.3	7.9-8.7	13.6		345	27.4	12.4			
2	1.5			1.25	P43B0020A2	9.9	12.2	49.4	1.6-2.2	10.8-12.0	900	15.1	383	31.0	14.1			
3	2.2			1.15	P43B0030A2	14.3	16.5	76.4	1.1-1.4	2.0-2.5		18.3	466	40.0	18.1			
5	3.7			60	1.15	1.15	P43B0050A2	24.0	27.0	101.0		0.62-0.76	1.36-1.66	1500	27.7	703	70.0	31.8
						1.6	P43B0005A8	2.9	3.4	4.1-5.2		22.0	10.0		254	18.9	8.6	
3 PHASE																		
RATING				SERVICE FACTOR	CATALOG NUMBER	FULL LOAD AMPS	MAX. LOAD (SF LOAD) AMPS	LINE TO LINE RESISTANCE OHMS	LOCKED ROTOR AMPS	THRUST RATING	LENGTH		WEIGHT					
HP	KW	VOLTS	HZ								IN.	MM	LB.	KG				
1/2	0.37	200	60	1.6	P43B0005A8	2.9	3.4	4.1-5.2	22.0	700	10.0	254	18.9	8.6				
		230			P43B0005A3	2.4	2.9	5.72-7.2	17.3		10.0	254	18.9	8.6				
		460			P43B0005A4	1.3	1.5	23.6-26.1	9.0		10.0	254	18.9	8.6				
3/4	0.55	200	60	1.5	P43B0007A8	3.8	4.5	2.6-3.0	32.0		10.8	274	21.4	9.7				
		230			P43B0007A3	3.3	3.9	3.3-4.3	27.0		10.8	274	21.4	9.7				
		460			P43B0007A4	1.7	2.0	14.4-16.2	14.0		10.8	274	21.4	9.7				
1	0.75	200	60	1.4	P43B0010A8	4.6	5.5	3.4-3.9	29.0	700	11.7	297	23.1	10.5				
		230			P43B0010A3	4.0	4.7	4.1-5.1	26.1		11.7	297	23.1	10.5				
		460			P43B0010A4	2.2	2.5	17.8-18.8	13.0		11.7	297	23.1	10.5				
1-1/2	1.1	200	60	1.3	P43B0015A8	6.3	7.2	1.9-2.5	40.0		700	11.7	297	23.1	10.5			
		230			P43B0015A3	5.2	6.1	2.8-3.4	32.4			11.7	297	23.1	10.5			
		460			P43B0015A4	2.8	3.2	12.3-13.1	16.3			11.7	297	23.1	10.5			
		575			P43B0015A5	2.0	2.4	19.8-20.6	11.5	11.7		297	23.1	10.5				
2	1.5	200	60	1.25	P43B0020A8	7.5	8.8	1.4-2.0	51.0	900		13.8	351	27.4	12.4			
		230			P43B0020A3	6.5	7.6	1.8-2.4	44.0			13.8	351	27.4	12.4			
		460			P43B0020A4	3.3	3.8	8.00-8.67	23.0		13.8	351	27.4	12.4				
		575			P43B0020A5	2.7	3.3	9.4-9.7	21.4		15.3	389	32.0	14.5				
3	2.2	200	60	1.15	P43B0030A8	10.9	12.0	0.9-1.3	71.0		900	15.3	389	32.0	14.5			
		230			P43B0030A3	9.2	10.1	1.3-1.7	58.9			15.3	389	32.0	14.5			
		460			P43B0030A4	4.8	5.3	5.9-6.5	30.0	15.3		389	32.0	14.5				
		575			P43B0030A5	3.7	4.1	9.4-9.7	21.4	15.3		389	32.0	14.5				
					200	P43B0050A8	18.3	20.2	0.4-0.8	113.0		21.7	551	55.0	24.9			
5	3.7	230	60	1.15	P43B0050A3	15.7	17.5	0.85-1.25	93.0	1500		21.7	551	55.0	24.9			
		460			P43B0050A4	7.6	8.5	3.58-4.00	48.0		21.7	551	55.0	24.9				
		575			P43B0050A5	7.0	7.6	3.6-4.2	55.0		27.7	703	70.0	31.8				
		200			P43B0075A8	27.0	30.0	0.5-0.6	165.0		27.7	703	70.0	31.8				
7-1/2	5.6	230	60	1.15	P43B0075A3	24.0	26.4	0.55-0.85	140.0		1500	27.7	703	70.0	31.8			
		460			P43B0075A4	12.2	13.5	1.9-2.3	87.0			27.7	703	70.0	31.8			
		575			P43B0075A5	9.1	10.0	3.6-4.2	55.0	27.7		703	70.0	31.8				
10	7.5	460	60	1.15	P43B0100A4	15.6	17.2	1.8-2.2	110.0	30.7		780	78.0	35.4				

NOTE: Amp ratings on 3-wire motors reflect use with CSIR controls. A CSCR control is recommended for lower values.

PENTEK® XE Series™ Motors

Stainless steel

OUTLINE DIMENSIONS

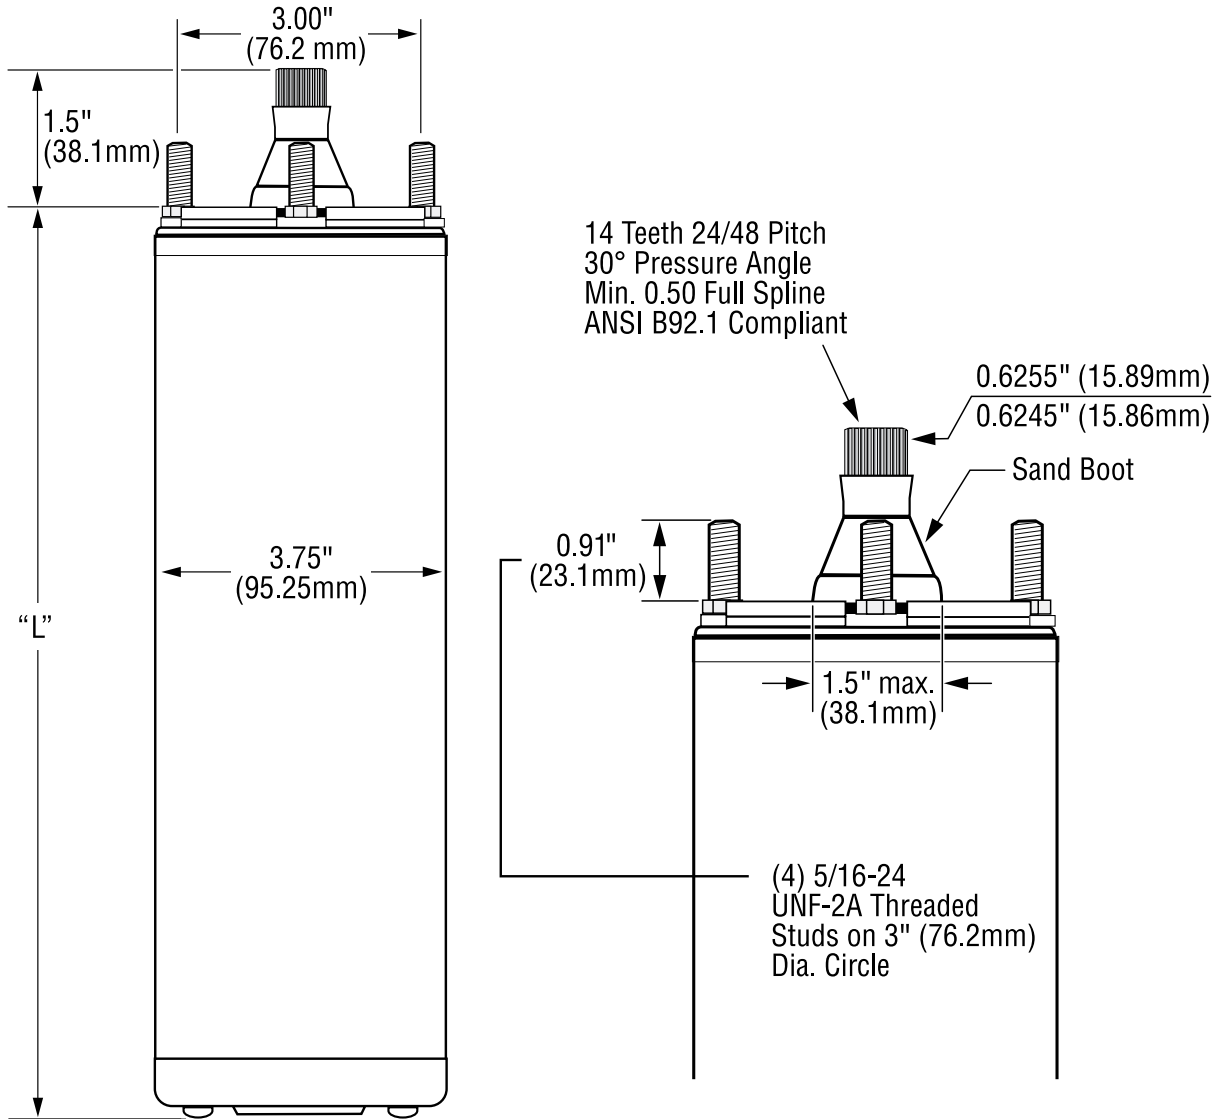

Dimensions (in inches) are for estimating purposes only.

LEAD LENGTH

CATALOG NUMBER	# OF WIRES	TYPE	LENGTH	GAUGE
XE SERIES REPLACEMENT MOTOR LEADS				
P18-1485K	2 Wire	XLPE	48"	14 Ga
P18-1486K	3 Wire	XLPE	48"	14 Ga
P18-1486K	3 Wire	XLPE	48"	14 Ga
P18-1486K	3 Wire	XLPE	48"	14 Ga



293 WRIGHT STREET, DELAVAN, WI 53115 WWW.STA-RITE.COM PH: 888-782-7483 ORDERS FAX: 800-426-9446
Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

S6305WS (05/23/13)