

MODEL NO	PART NO	HP	VOLT/PH	Hz	RPM (Nom)	NEMA START CODE	FULL LOAD AMPS	LOCKED ROTOR AMPS	CORD SIZE	CORD TYPE	CORD O.D inch (mm)
SE51HT	104876	0.5	120/1	60	1750	R	17.0	63.8	14/3	SOW	0.530 (13.5)
SE51HTA	104877	0.5	120/1	60	1750	R	17.0	63.8	14/3	SOW	0.530 (13.5)
SE51HTAU	104878	0.5	120/1	60	1750	R	17.0	63.8	14/3	SOW	0.530 (13.5)
SE52HT	104879	0.5	240/1	60	1750	R	8.5	30.1	14/3	SOW	0.530 (13.5)
SE52HTAU	104880	0.5	240/1	60	1750	R	8.5	30.1	14/3	SOW	0.530 (13.5)

Mechanical Switch on SE51HTA, cord 16/2, SJOW, 0.320 (8.1mm) O.D. Piggy-Back Plug
Mechanical Switch on SE51HTAU, cord 14/2, SJOW, 0.345 (8.8mm) O.D.

IMPORTANT !

- 1.) PUMP MAY BE OPERATED "DRY" FOR EXTENDED PERIODS WITHOUT DAMAGE TO MOTOR AND/OR SEALS.
- 2.) THIS PUMP IS NOT APPROPRIATE FOR THOSE APPLICATIONS SPECIFIED AS CLASS I DIVISION I HAZARDOUS LOCATIONS.
- 3.) INSTALLATIONS SUCH AS DECORATIVE FOUNTAINS OR WATER FEATURES PROVIDED FOR VISUAL ENJOYMENT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE ANSI/NFPA 70 AND/OR THE AUTHORITY HAVING JURISDICTION. THIS PUMP IS NOT INTENDED FOR USE IN SWIMMING POOLS, RECREATIONAL WATER PARKS, OR INSTALLATIONS IN WHICH HUMAN CONTACT WITH PUMPED MEDIA IS A COMMON OCCURRENCE.
- 4.) MUST USE A **HIGH TEMPERATURE** WIDE ANGLE LEVEL CONTROL IN HIGH TEMPERATURE APPLICATIONS.

Series SE-HT


Performance Curve

.5HP, 1750RPM, 60Hz, High Temperature

BARNES®

www.cranepumps.com

1½", 2" & 3" Discharge

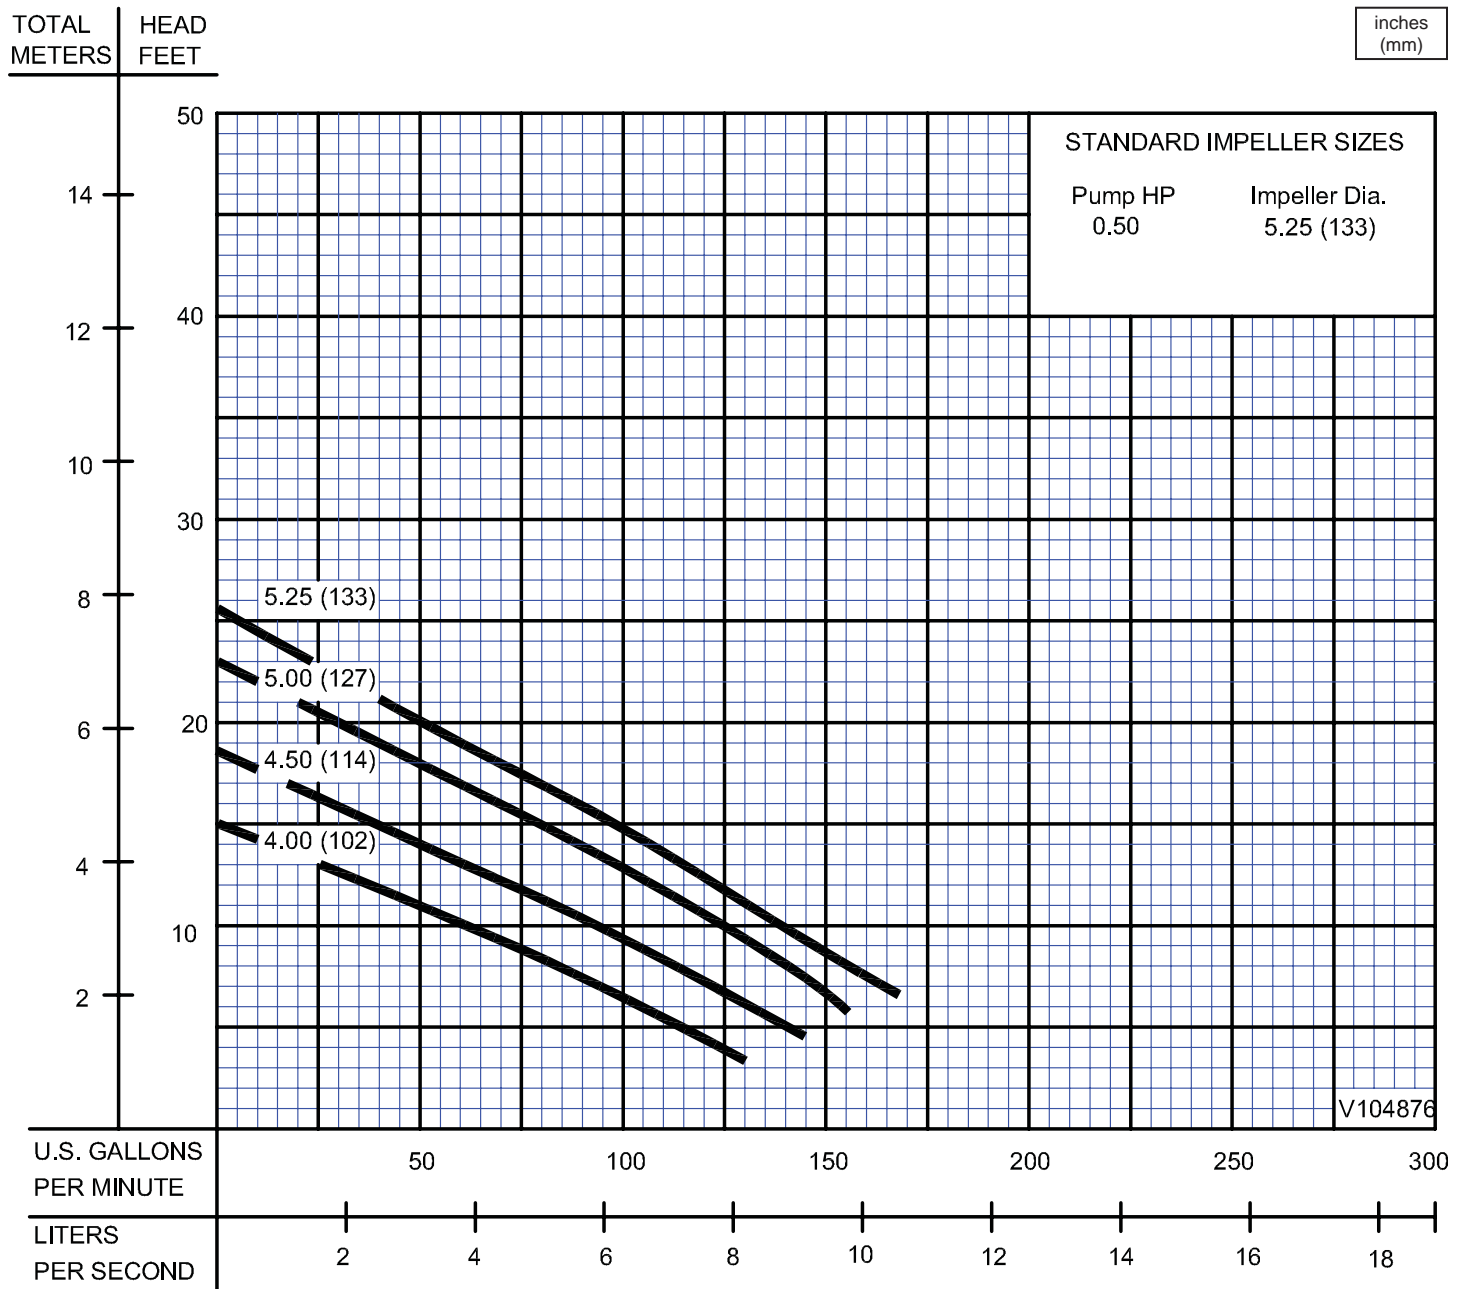

Testing is performed with water, specific gravity 1.0 @ 68° F @ (20°C), other fluids may vary performance

SECTION 1B
 PAGE 18
 DATE 6/04

CRANE®

A Crane Co. Company

PUMPS & SYSTEMS

USA: (937) 778-8947 • Canada: (905) 457-6223 • International: (937) 615-3598