

ULTRACHEM® SERIES CURVE BOOK

CATALOG ID #FT01-835D, Rev. 16



FINISH THOMPSON INC.

Order Online: www.PumpCatalog.com

TABLE OF CONTENTS
Model UC1516

3500 rpm, 60 Hz, 1-1/2" x 1"	4
1750 rpm, 60 Hz, 1-1/2" x 1"	5
2900 rpm, 50 Hz, 1-1/2" x 1"	6
1450 rpm, 50 Hz, 1-1/2" x 1"	7

Model UC1516L

3500 rpm, 60 Hz, 1-1/2" x 1"	8
1750 rpm, 60 Hz, 1-1/2" x 1"	9
2900 rpm, 50 Hz, 1-1/2" x 1"	10
1450 rpm, 50 Hz, 1-1/2" x 1"	11

Model UC1518

3500 rpm, 60 Hz, 1-1/2" x 1"	12
1750 rpm, 60 Hz, 1-1/2" x 1"	13
2900 rpm, 50 Hz, 1-1/2" x 1"	14
1450 rpm, 50 Hz, 1-1/2" x 1"	15

Model UC1518L

3500 rpm, 60 Hz, 1-1/2" x 1"	16
1750 rpm, 60 Hz, 1-1/2" x 1"	17
2900 rpm, 50 Hz, 1-1/2" x 1"	18
1450 rpm, 50 Hz, 1-1/2" x 1"	19

Model UC2110

3500 rpm, 60 Hz, 2" x 1"	20
1750 rpm, 60 Hz, 2" x 1"	21
2900 rpm, 50 Hz, 2" x 1"	22
1450 rpm, 50 Hz, 2" x 1"	23

Model UC2110L

3500 rpm, 60 Hz, 2" x 1"	24
1750 rpm, 60 Hz, 2" x 1"	25
2900 rpm, 50 Hz, 2" x 1"	26
1450 rpm, 50 Hz, 2" x 1"	27

Model UC3110

3500 rpm, 60 Hz, 3" x 1"	28
1750 rpm, 60 Hz, 3" x 1"	29
2900 rpm, 50 Hz, 3" x 1"	30
1450 rpm, 50 Hz, 3" x 1"	31

Model UC3156

3500 rpm, 60 Hz, 3" x 1.5"	32
1750 rpm, 60 Hz, 3" x 1.5"	33
2900 rpm, 50 Hz, 3" x 1.5"	34
1450 rpm, 50 Hz, 3" x 1.5"	35

Model UC326/326H

3500 rpm, 60 Hz, 3" x 2"	36
1750 rpm, 60 Hz, 3" x 2"	37
2900 rpm, 50 Hz, 3" x 2"	38
1450 rpm, 50 Hz, 3" x 2"	39

Order Online: www.PumpCatalog.com

Model UC328

3500 rpm, 60 Hz, 3" x 2"	40
1750 rpm, 60 Hz, 3" x 2"	41
2900 rpm, 50 Hz, 3" x 2"	42
1450 rpm, 50 Hz, 3" x 2"	43

Model UC3158

3500 rpm, 60 Hz, 3" x 1-1/2"	44
1750 rpm, 60 Hz, 3" x 1-1/2"	45
2900 rpm, 50 Hz, 3" x 1-1/2"	46
1450 rpm, 50 Hz, 3" x 1-1/2"	47

Model UC3210

3500 rpm, 60 Hz, 3" x 2"	48
1750 rpm, 60 Hz, 3" x 2"	49
2900 rpm, 50 Hz, 3" x 2"	50
1450 rpm, 50 Hz, 3" x 2"	51

Model UC436

3500 rpm, 60 Hz, 4" x 3"	52
1750 rpm, 60 Hz, 4" x 3"	53
2900 rpm, 50 Hz, 4" x 3"	54
1450 rpm, 50 Hz, 4" x 3"	55

Model UC436L

3500 rpm, 60 Hz, 4" x 3"	56
1750 rpm, 60 Hz, 4" x 3"	57
2900 rpm, 50 Hz, 4" x 3"	58
1450 rpm, 50 Hz, 4" x 3"	59

Model UC438

3500 rpm, 60 Hz, 4" x 3"	60
1750 rpm, 60 Hz, 4" x 3"	61
2900 rpm, 50 Hz, 4" x 3"	62
1450 rpm, 50 Hz, 4" x 3"	63

Model UC4310H

1750 rpm, 60 Hz, 4" x 3"	64
1450 rpm, 50 Hz, 4" x 3"	65

Model UC6410

1750 rpm, 60 Hz, 6" x 4"	65
1450 rpm, 50 Hz, 6" x 4"	66

Headquarters Information:


Finish Thompson Inc.
 921 Greengarden Road
 Erie, PA 16501 USA
 PH 814-455-4478
 FAX 814-455-8518
 EMAIL fti@finishthompson.com

Europe Center Information:

Otto-Hahn-Strasse 16
 Maintal, D-63477 DEU
 P: +49 (0)6181-90878-0
 F: +49 (0)6181-90878-18
 EMAIL europecenter@finishthompson.com

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC1516
3500 rpm, 60 Hz
Suction: 1.5"
Discharge: 1"
S.G. 1.0

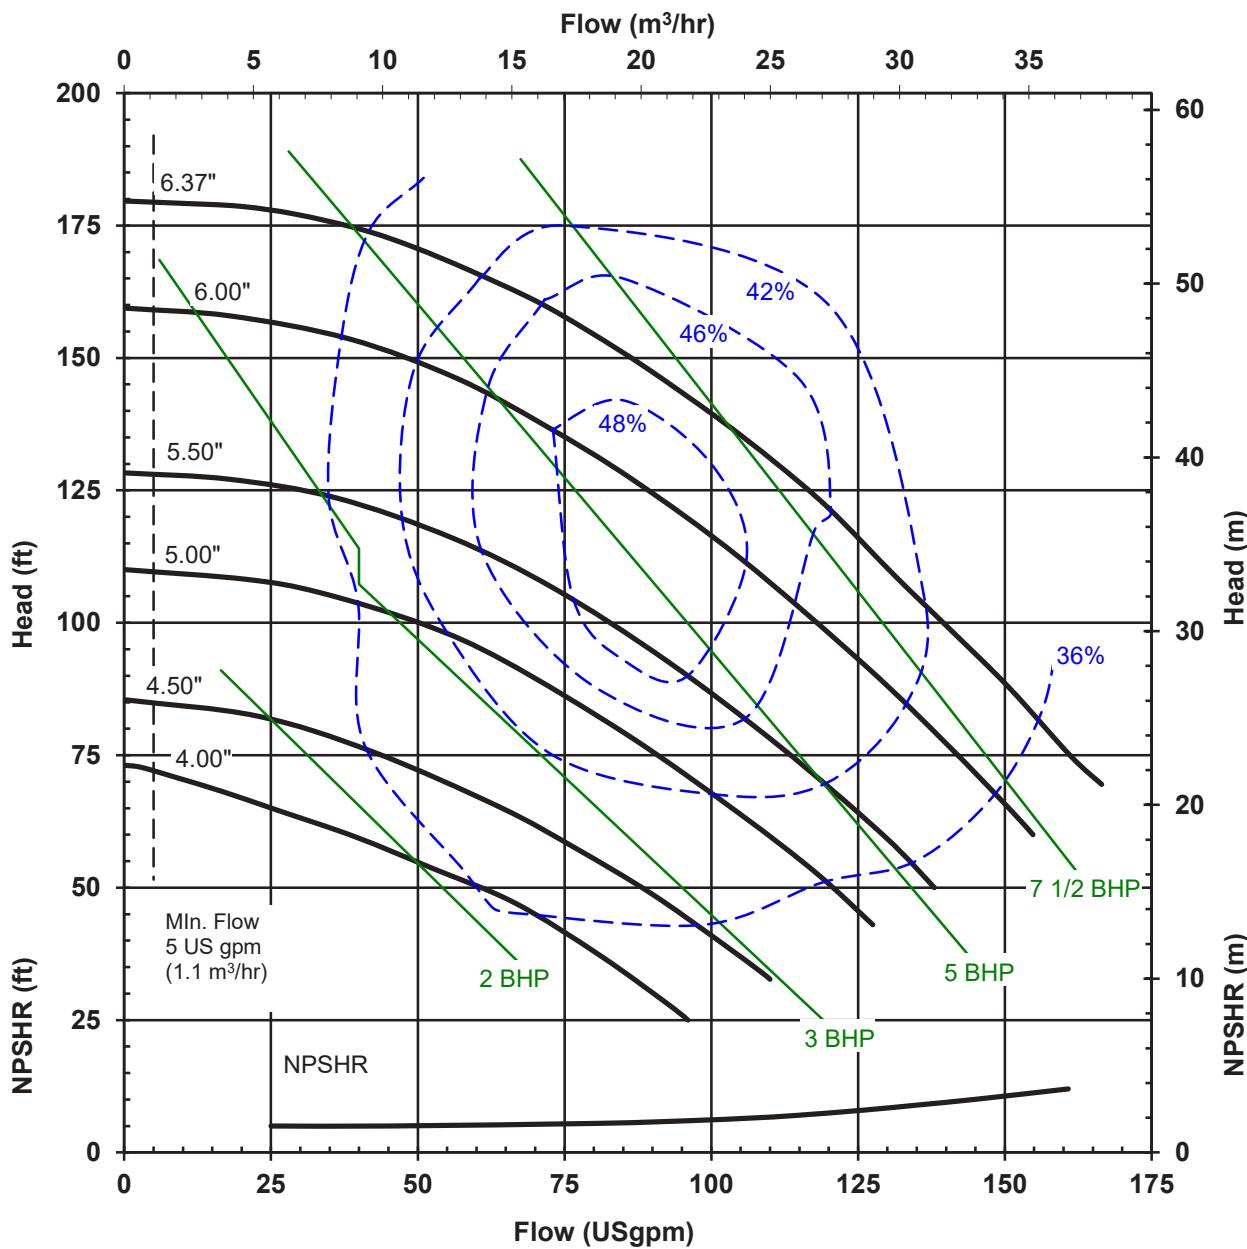

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC1516
 1750 rpm, 60 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

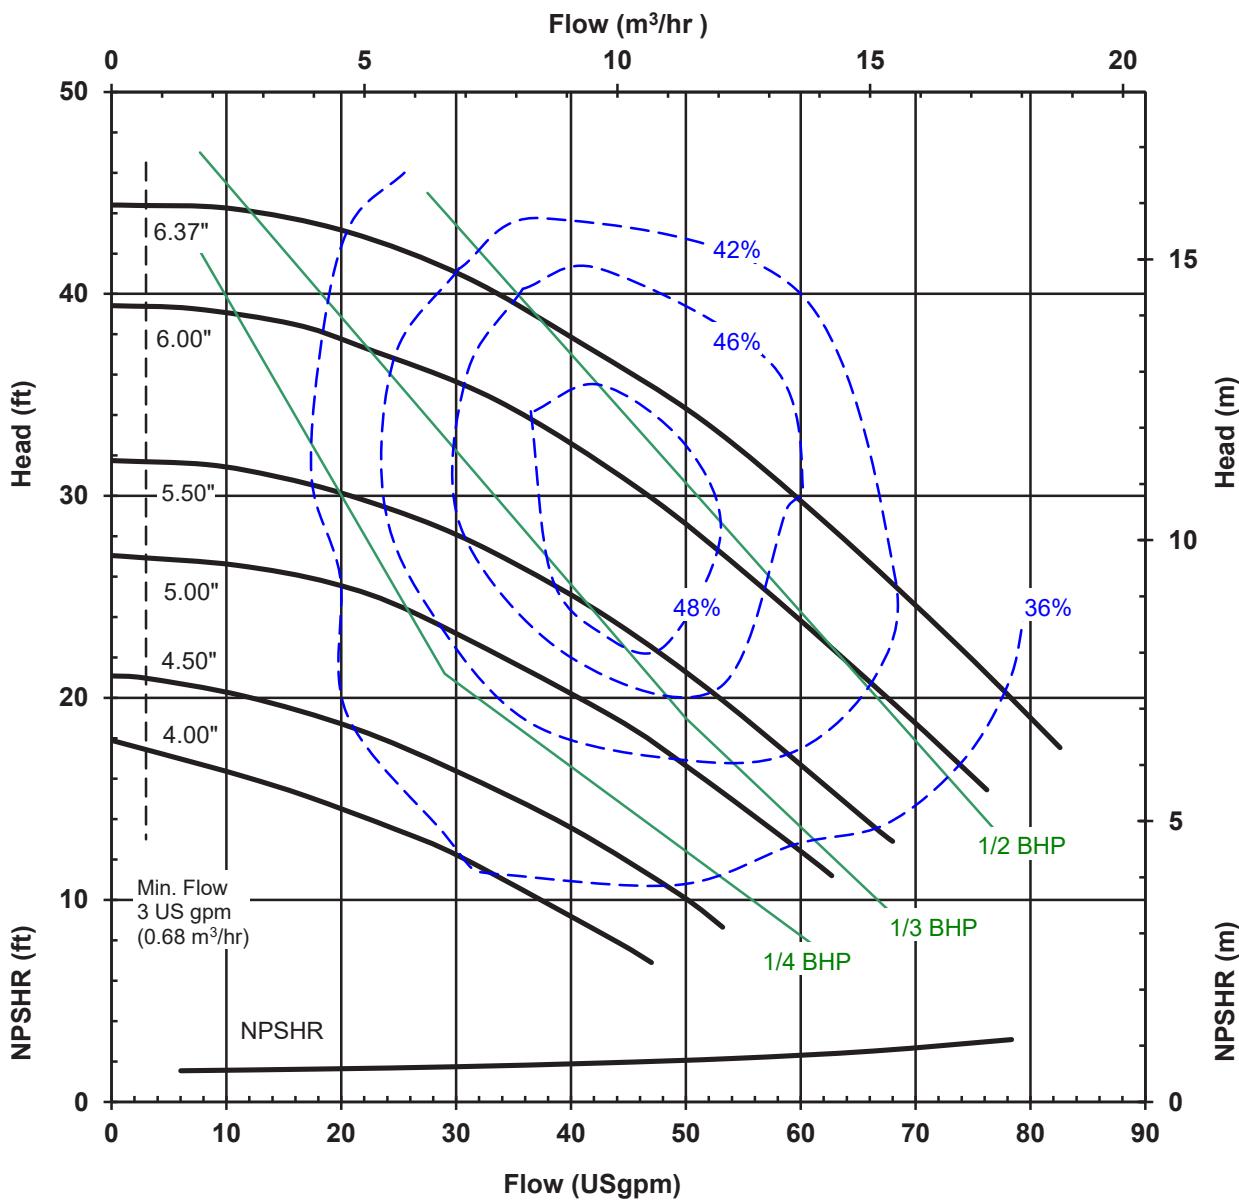

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1516
2900 rpm, 50 Hz
Suction: 1.5"
Discharge: 1"
S.G. 1.0

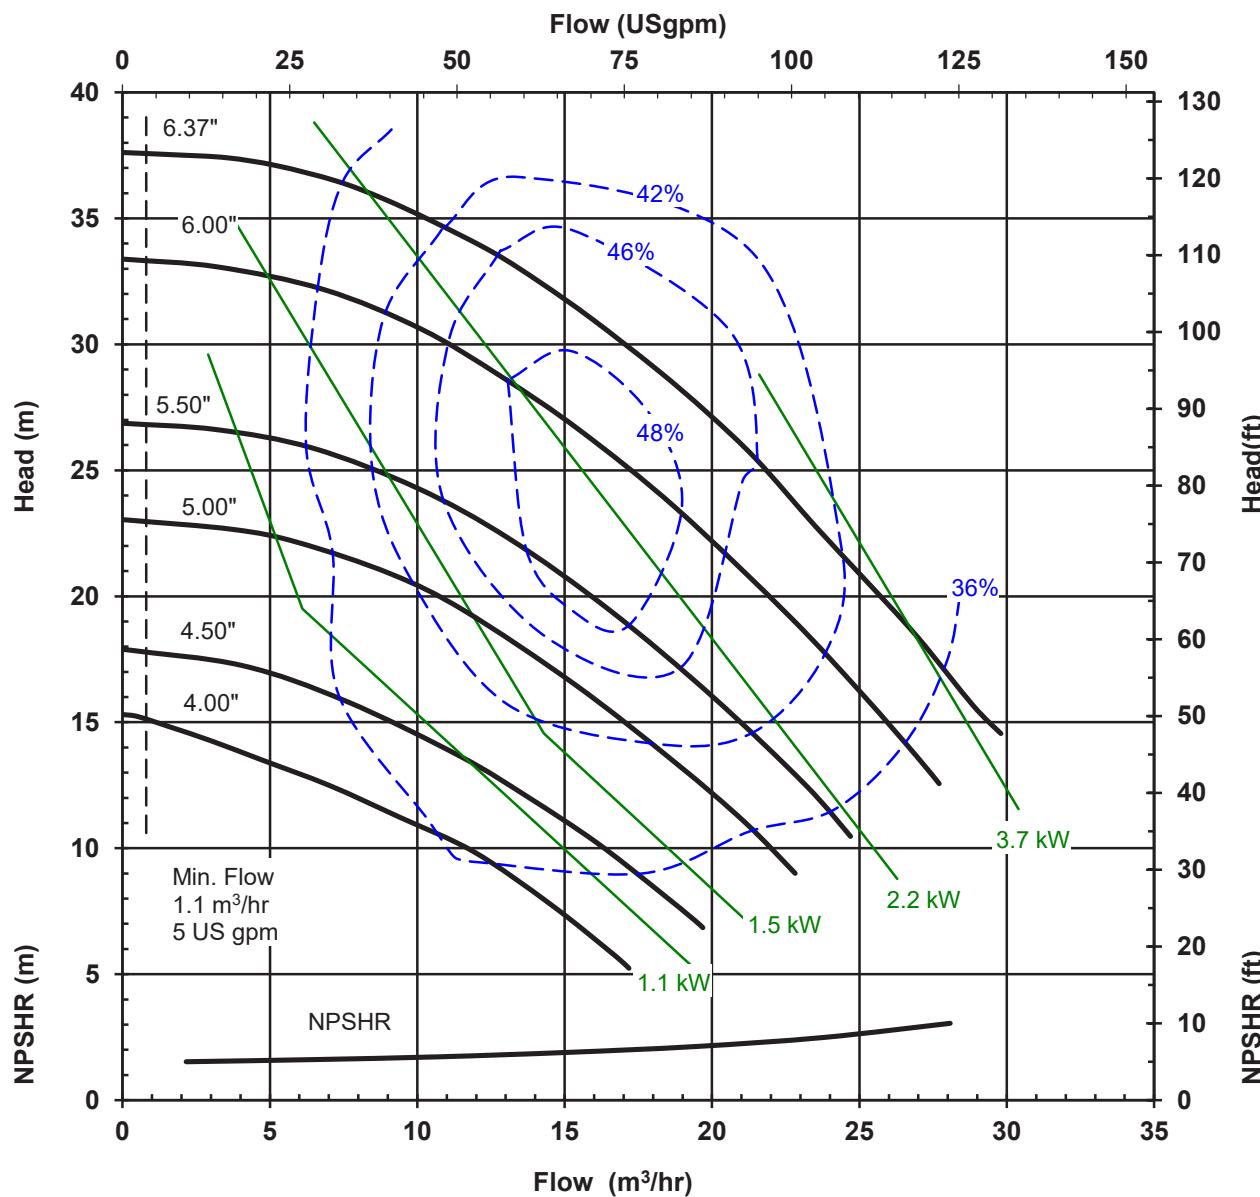

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC1516
 1450 rpm, 50 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

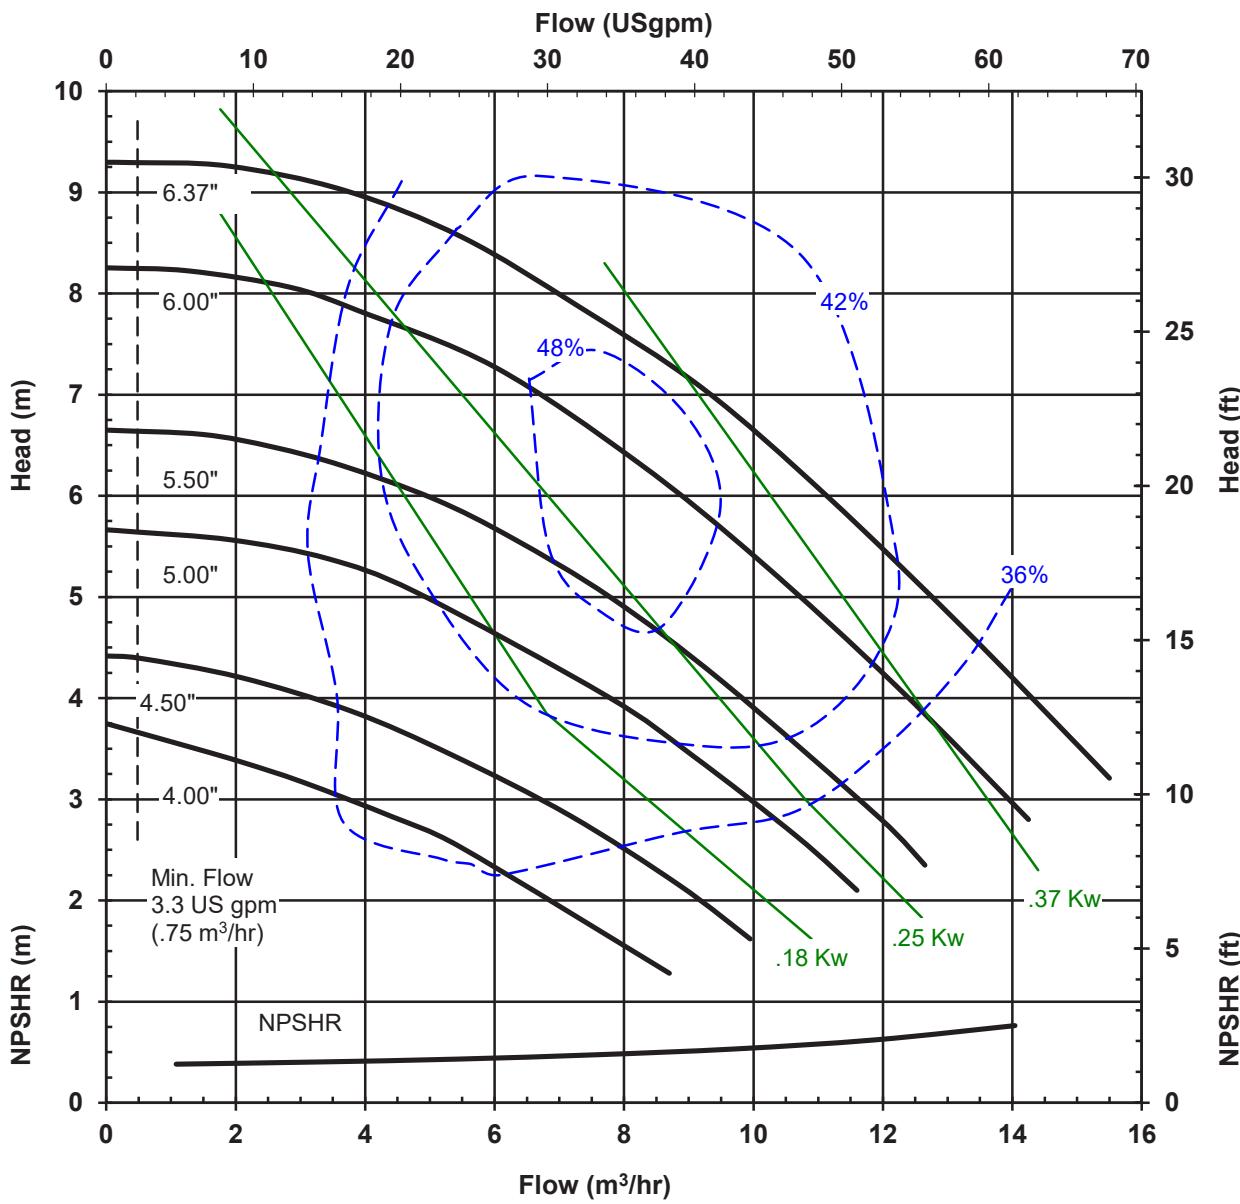

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC1516L
 3500 rpm, 60 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

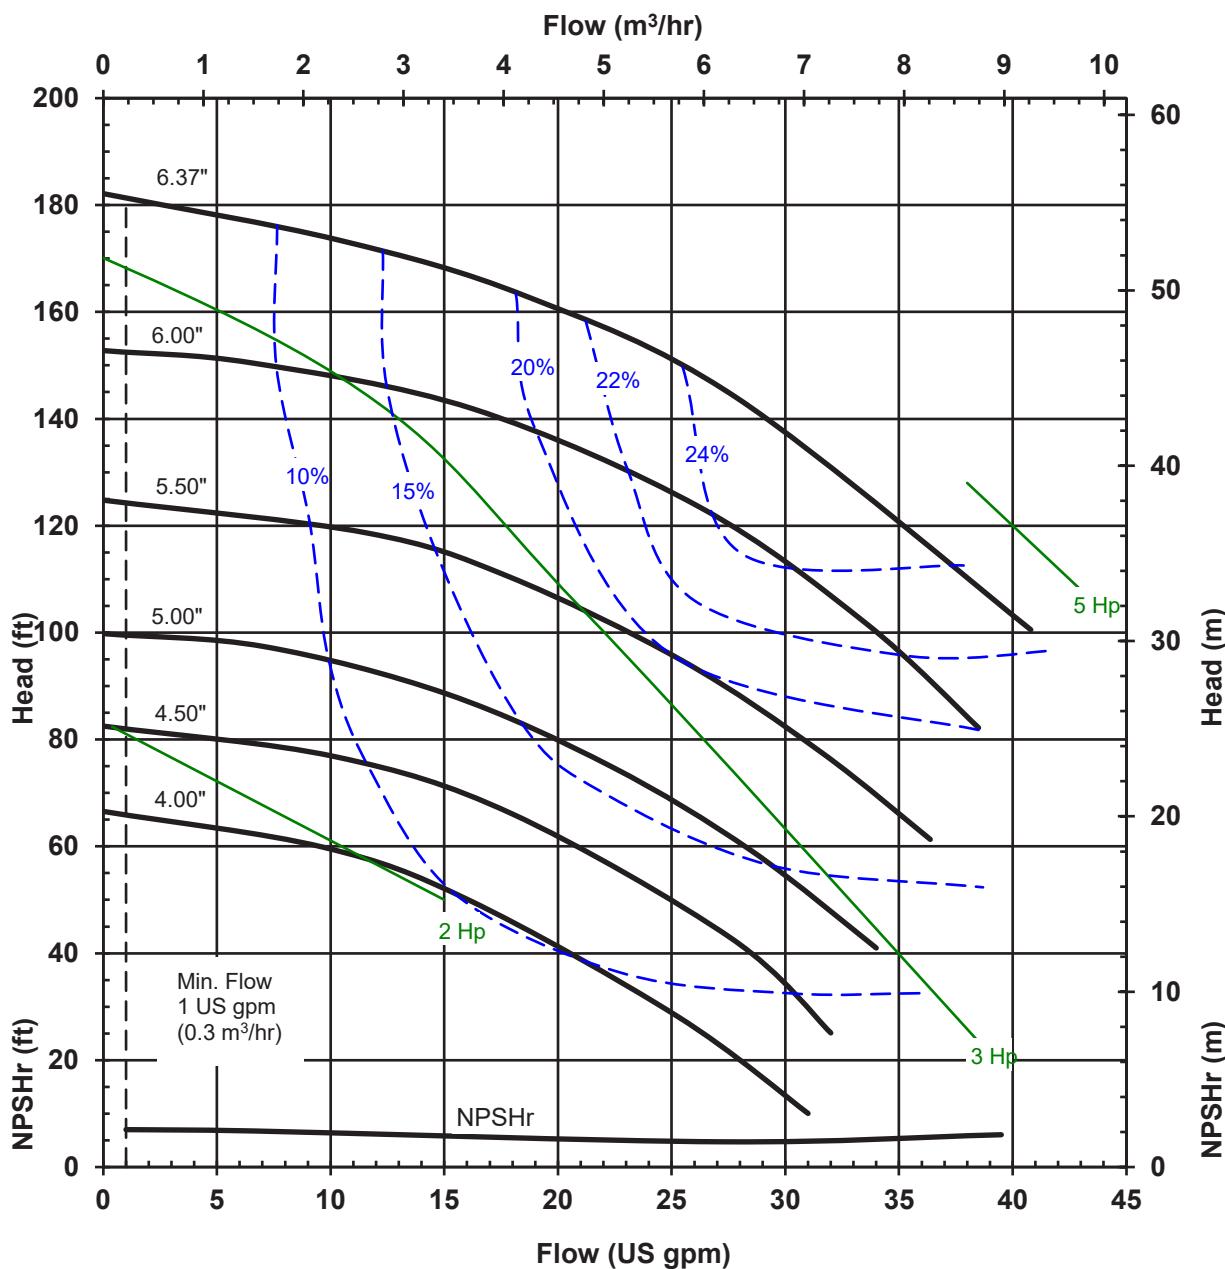

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1516L
1750 rpm, 60 Hz
Suction: 1.5"
Discharge: 1"
S.G. 1.0

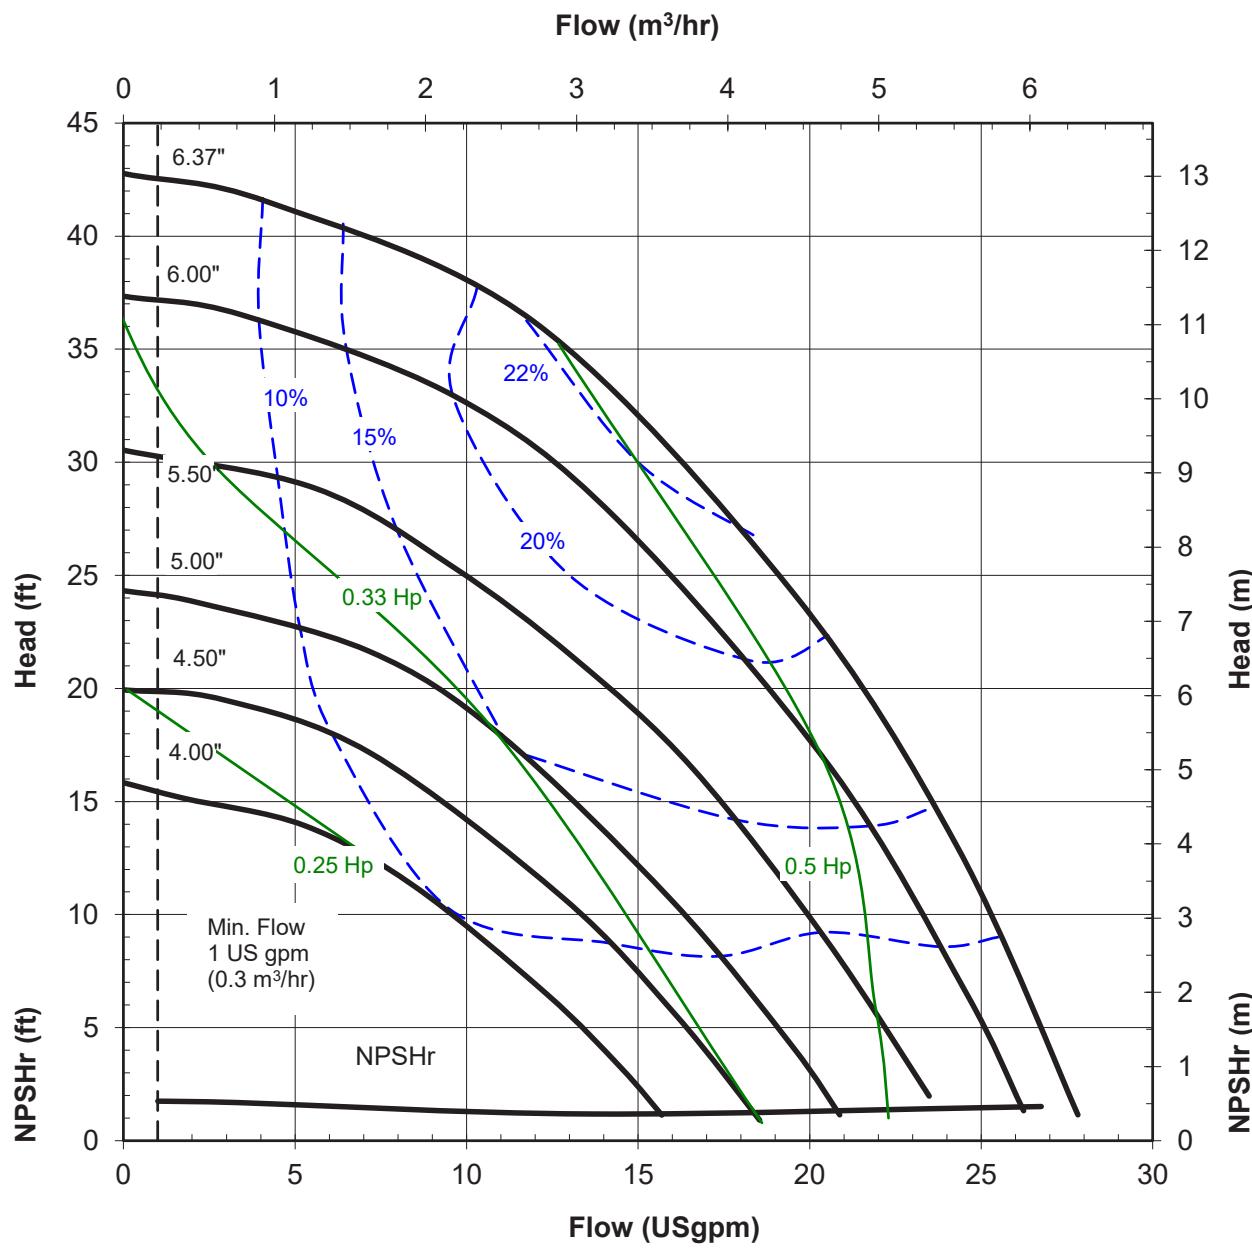

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC1516L
 2900 rpm, 50 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

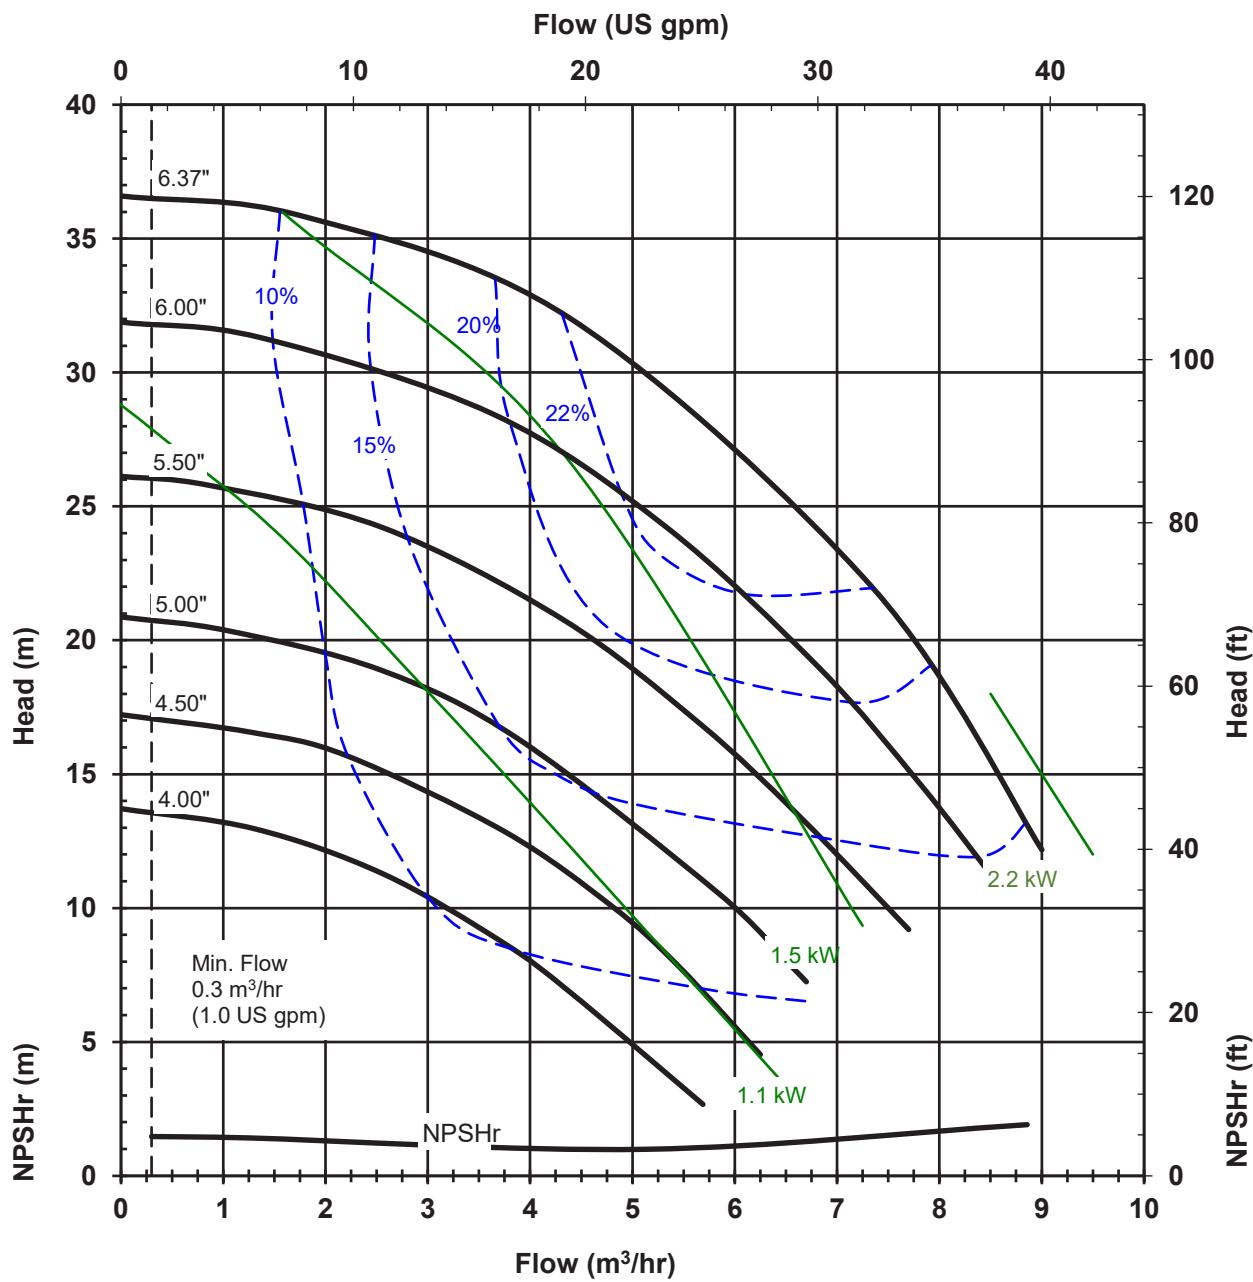

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1516L
 1450 rpm, 50 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

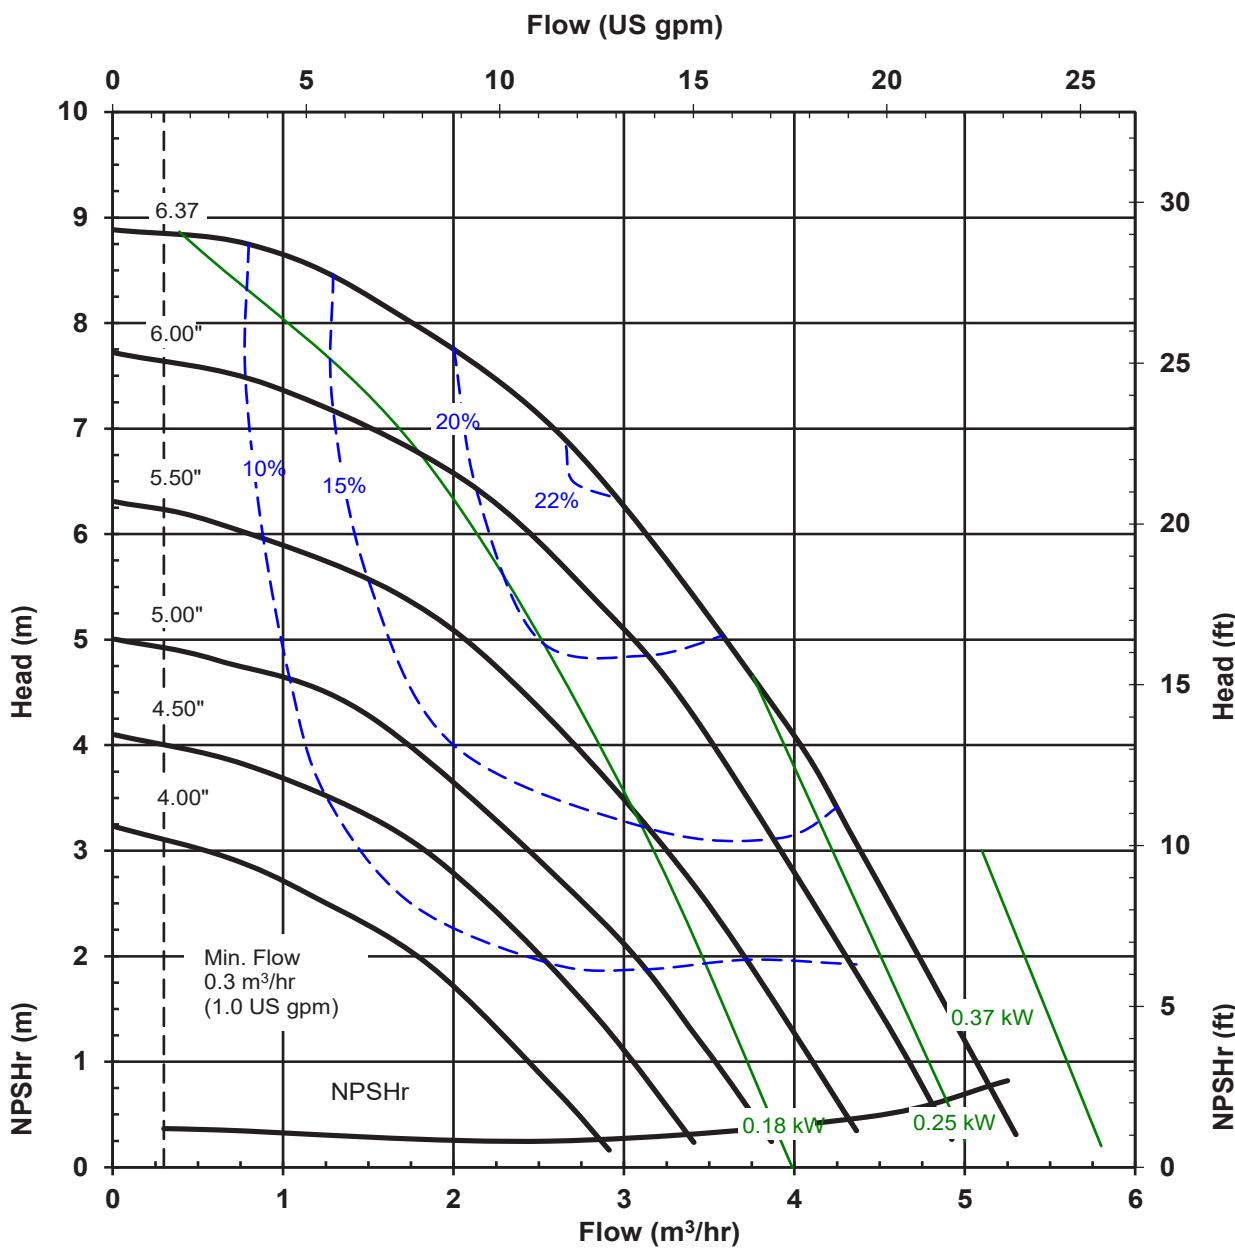

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**

MODEL: UC1518
 3500 rpm, 60 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

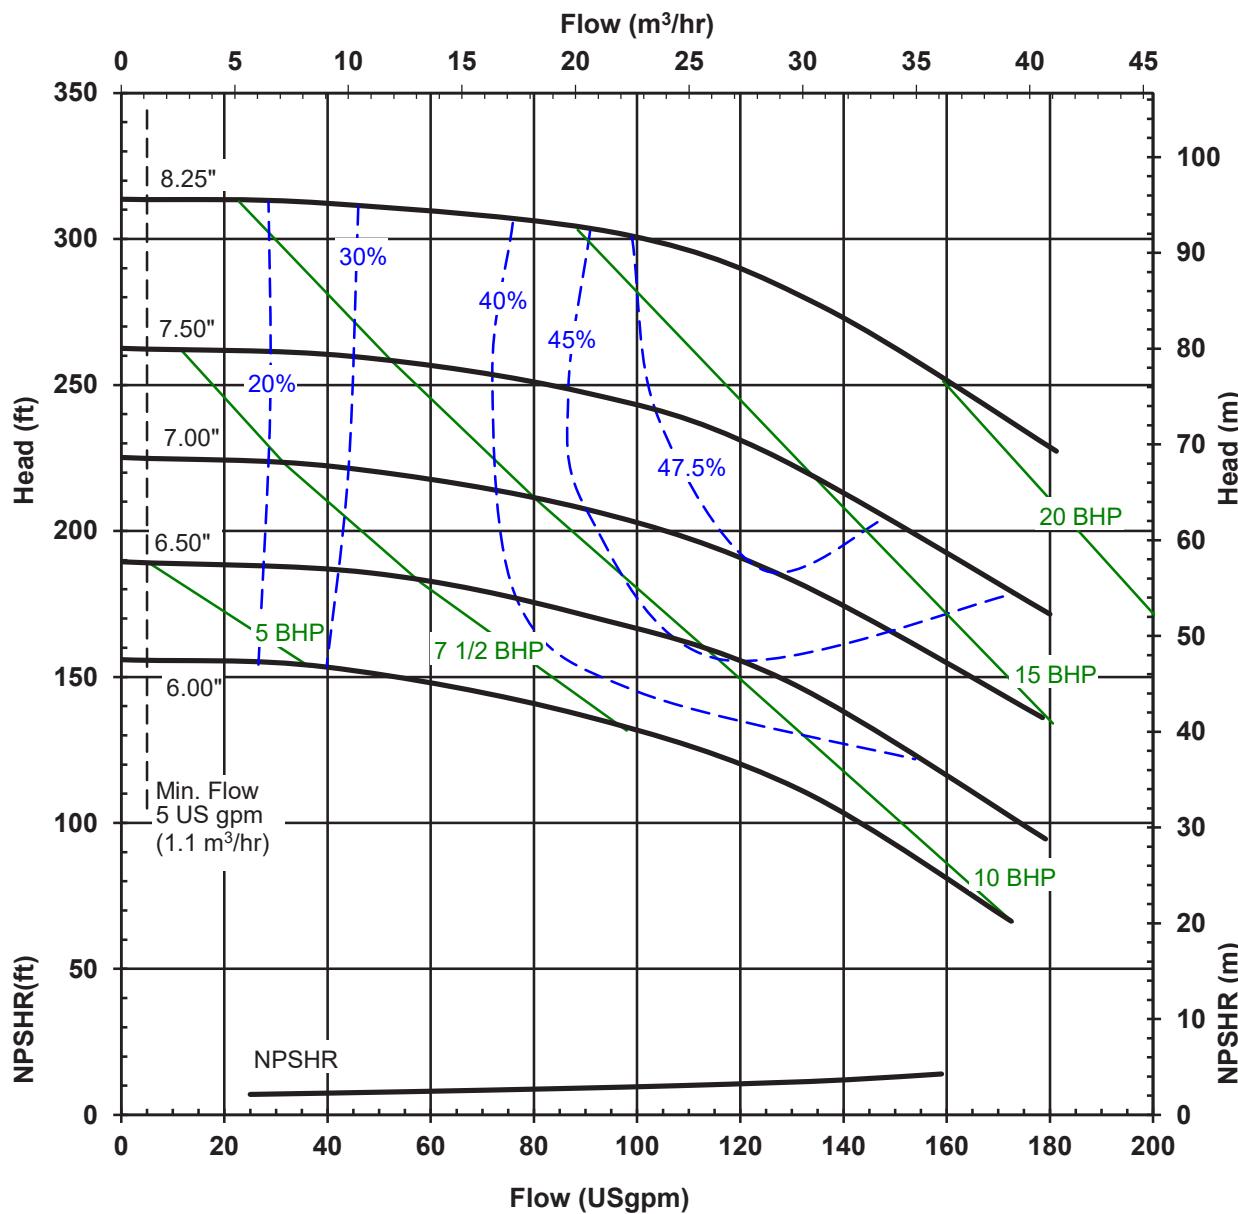

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1518

1750 rpm, 60 Hz

Suction: 1.5"

Discharge: 1"


S.G. 1.0

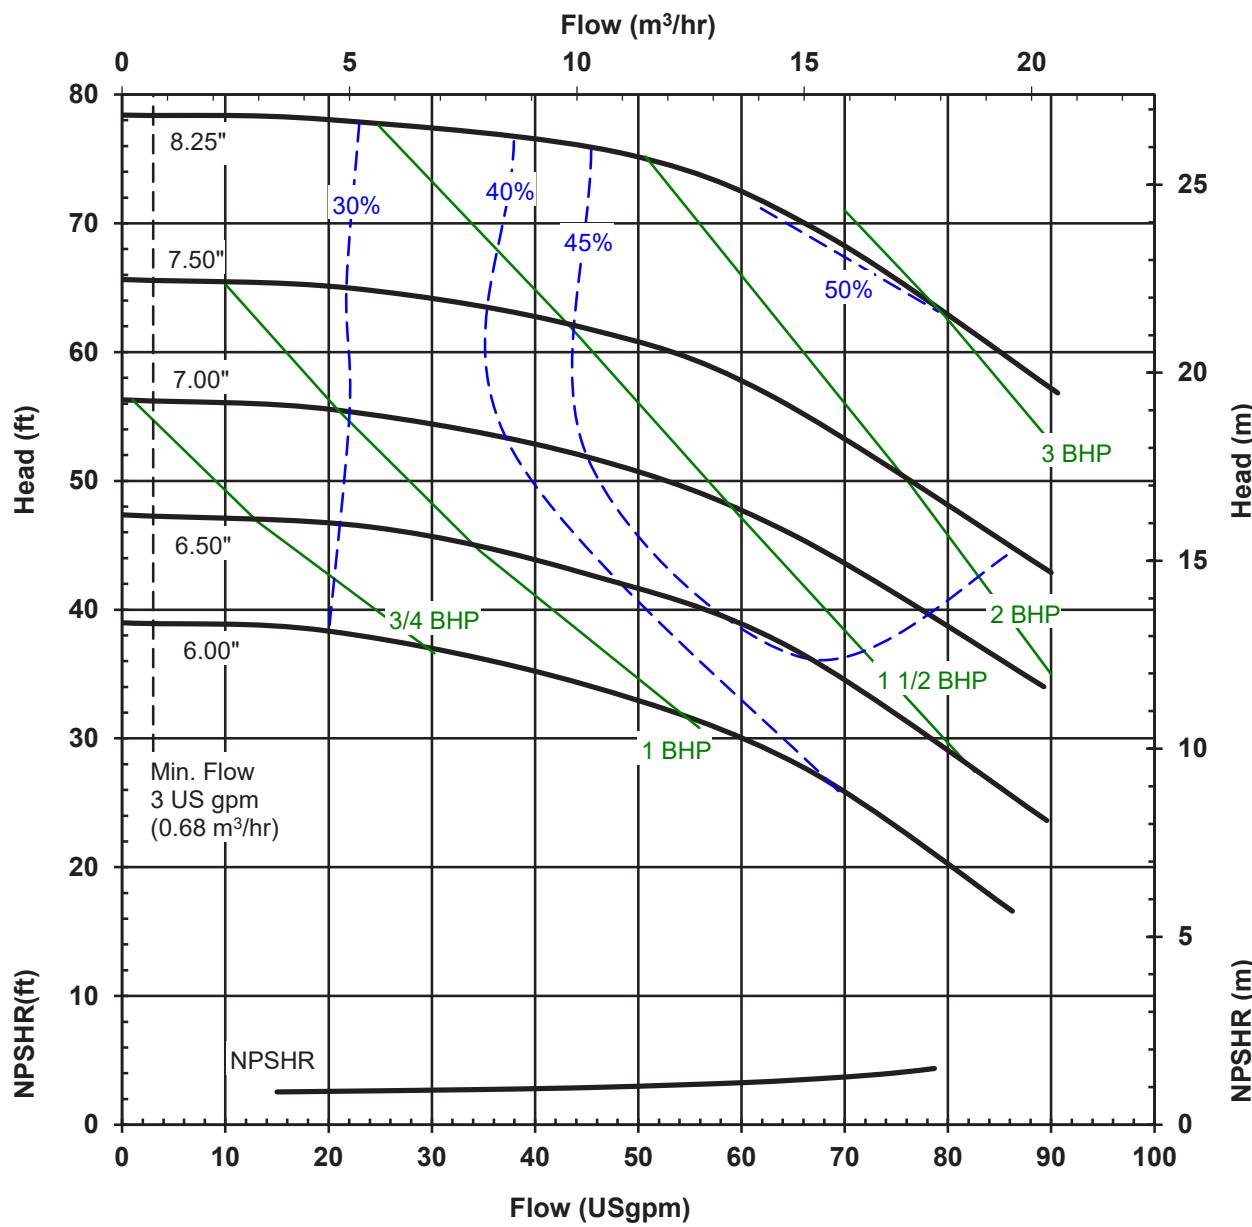

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1518
2900 rpm, 50 Hz
Suction: 1.5"
Discharge: 1"
S.G. 1.0

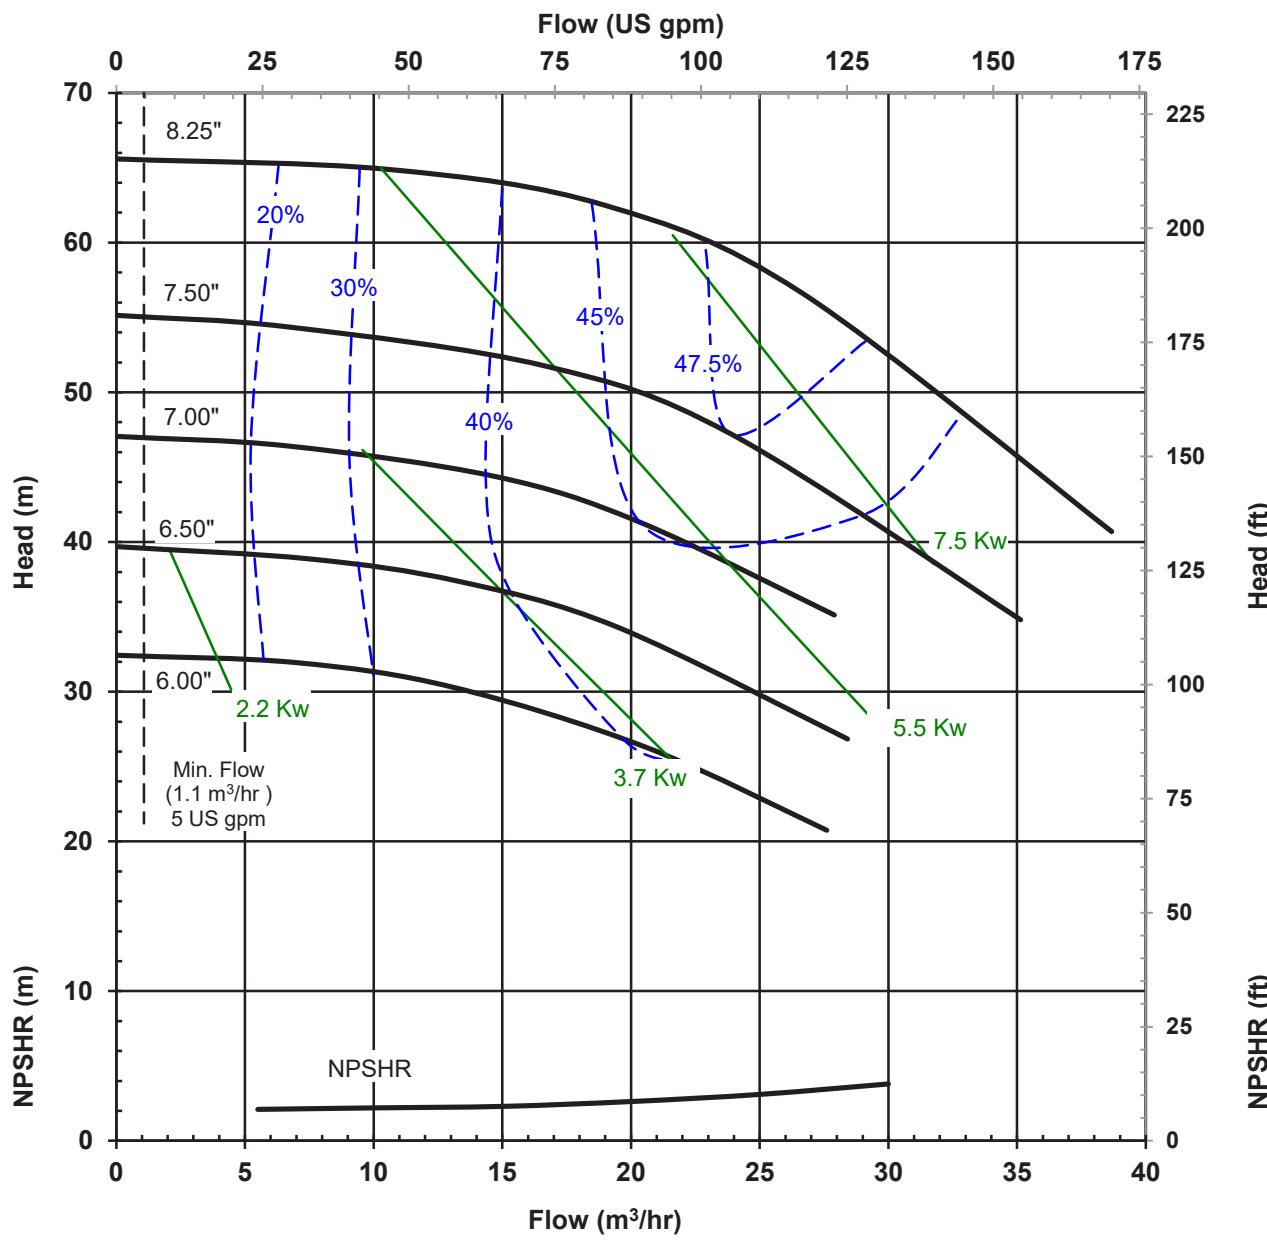

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC1518
 1450 rpm, 50 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

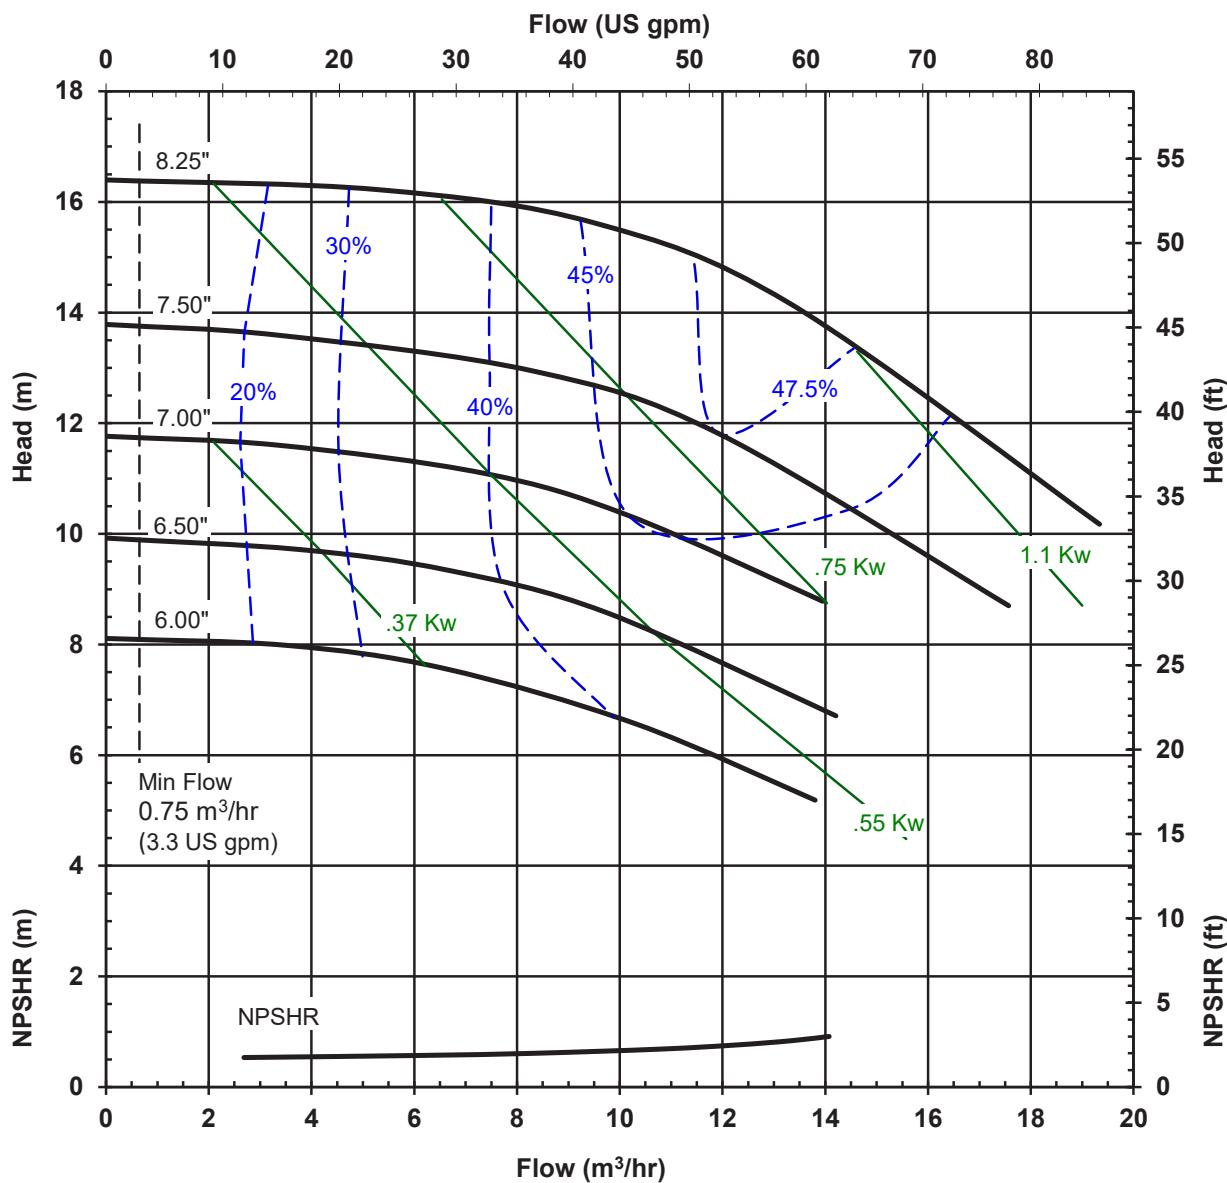

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC1518L
 3500 rpm, 60 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

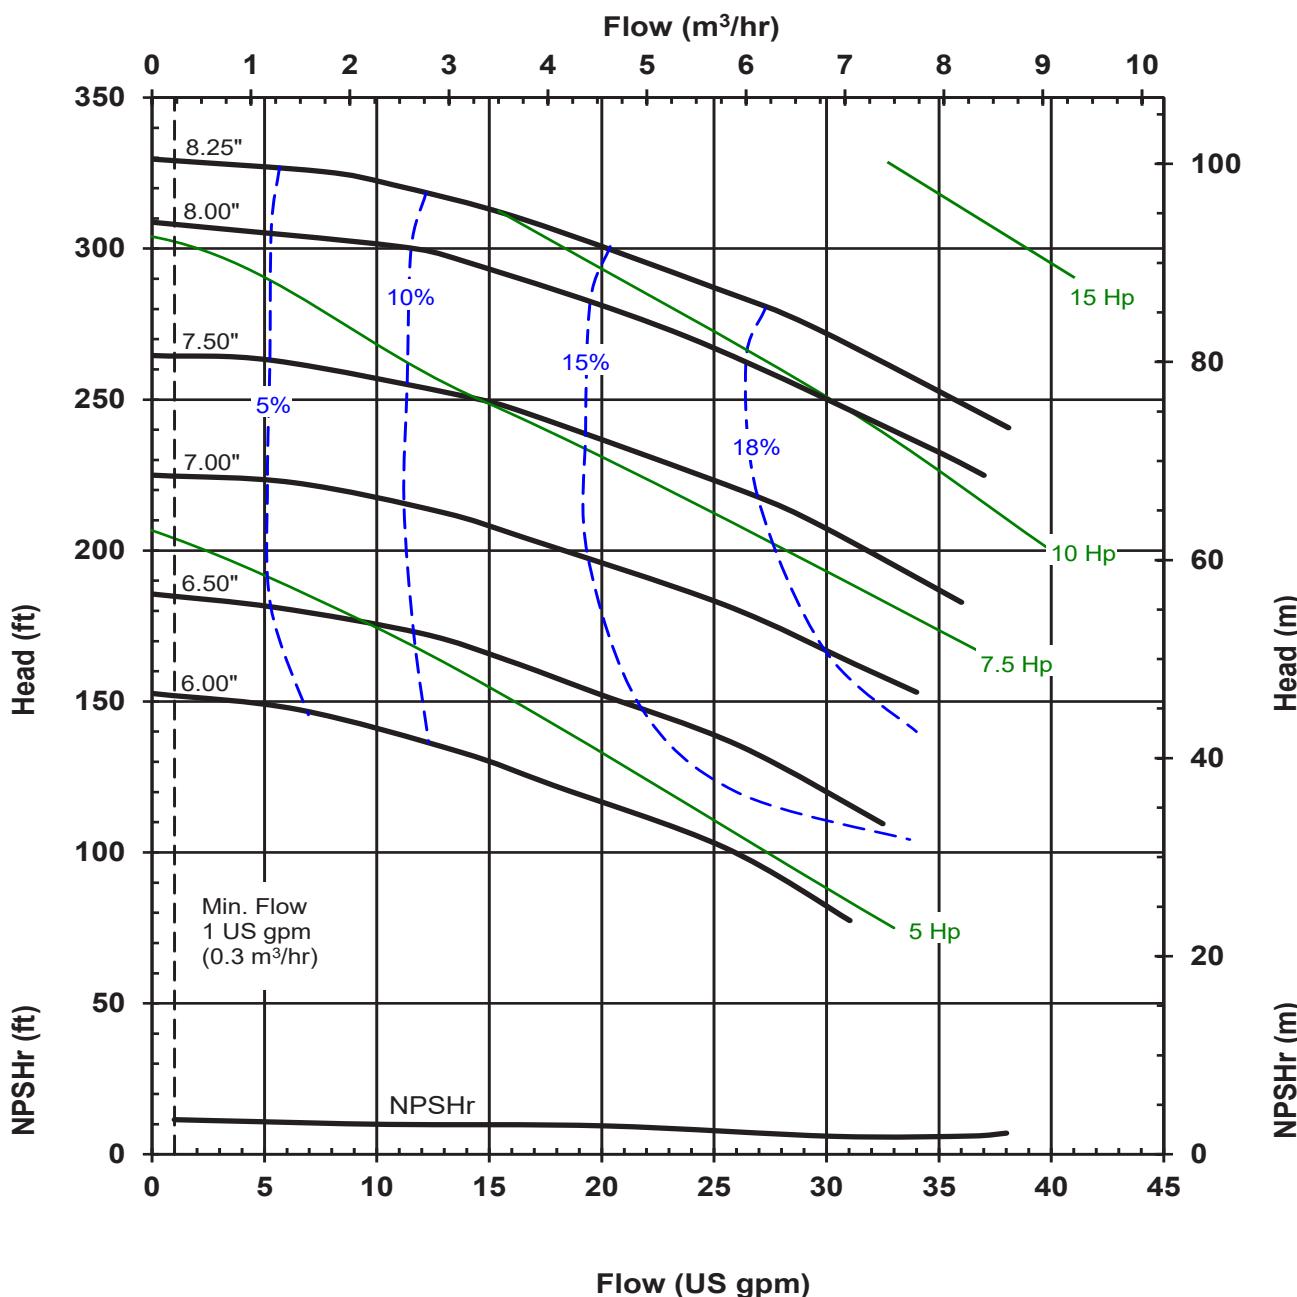

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1518L
 1750 rpm, 60 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

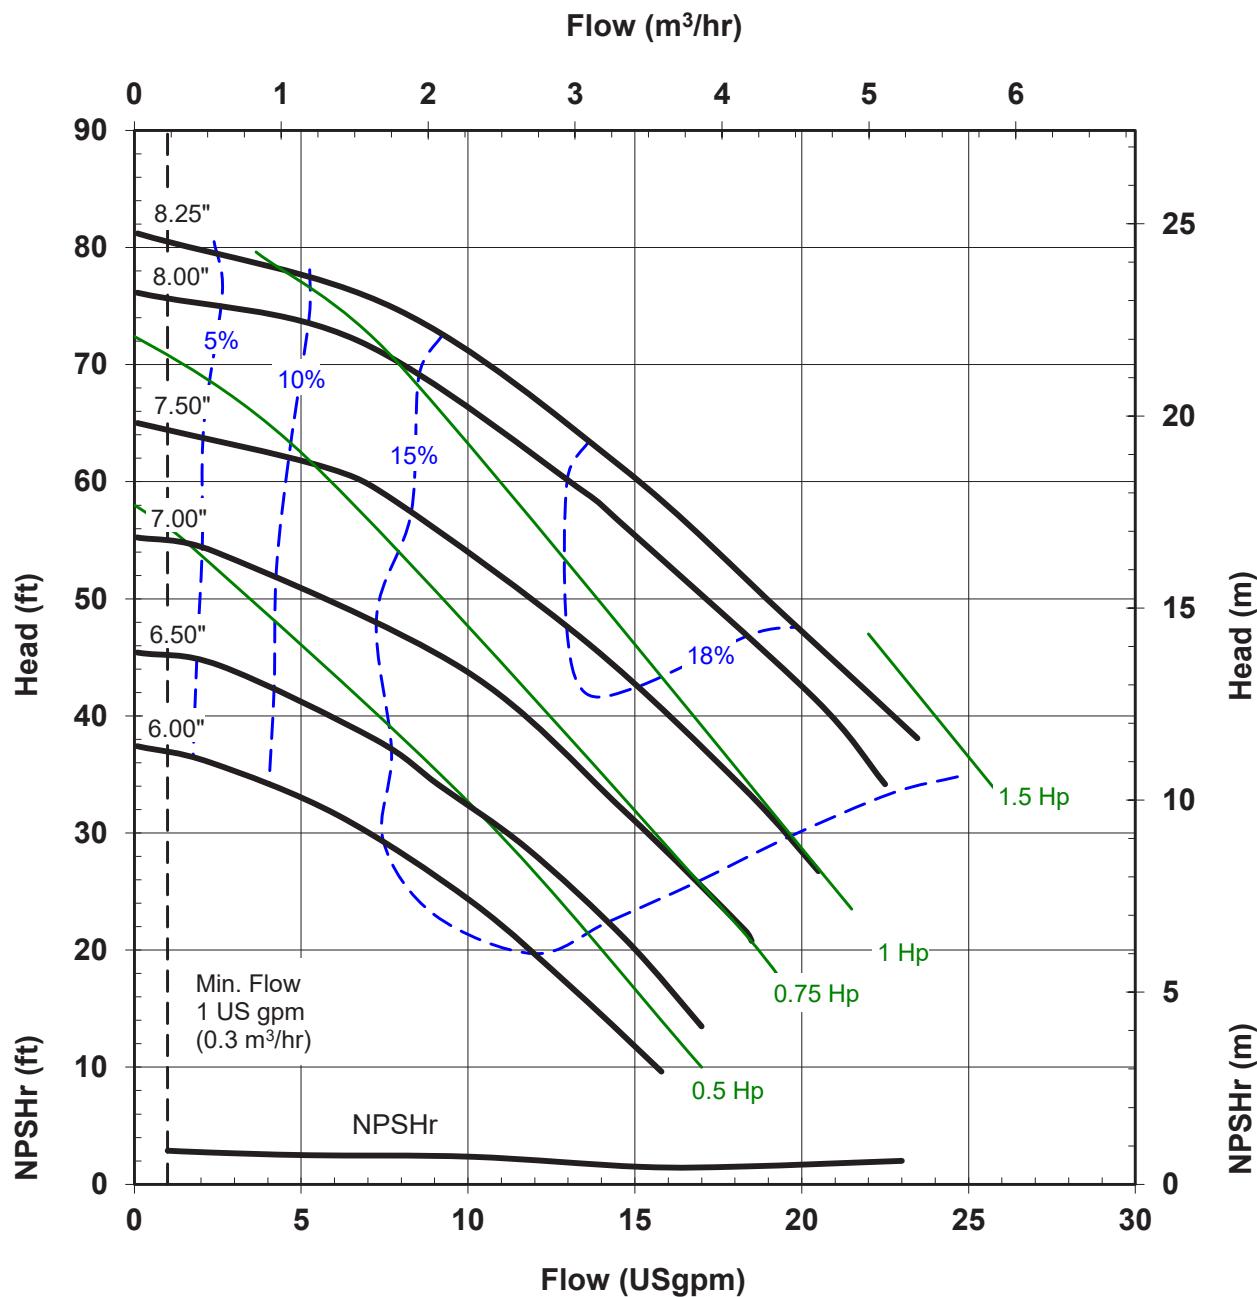

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC1518L
 2900 rpm, 50 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

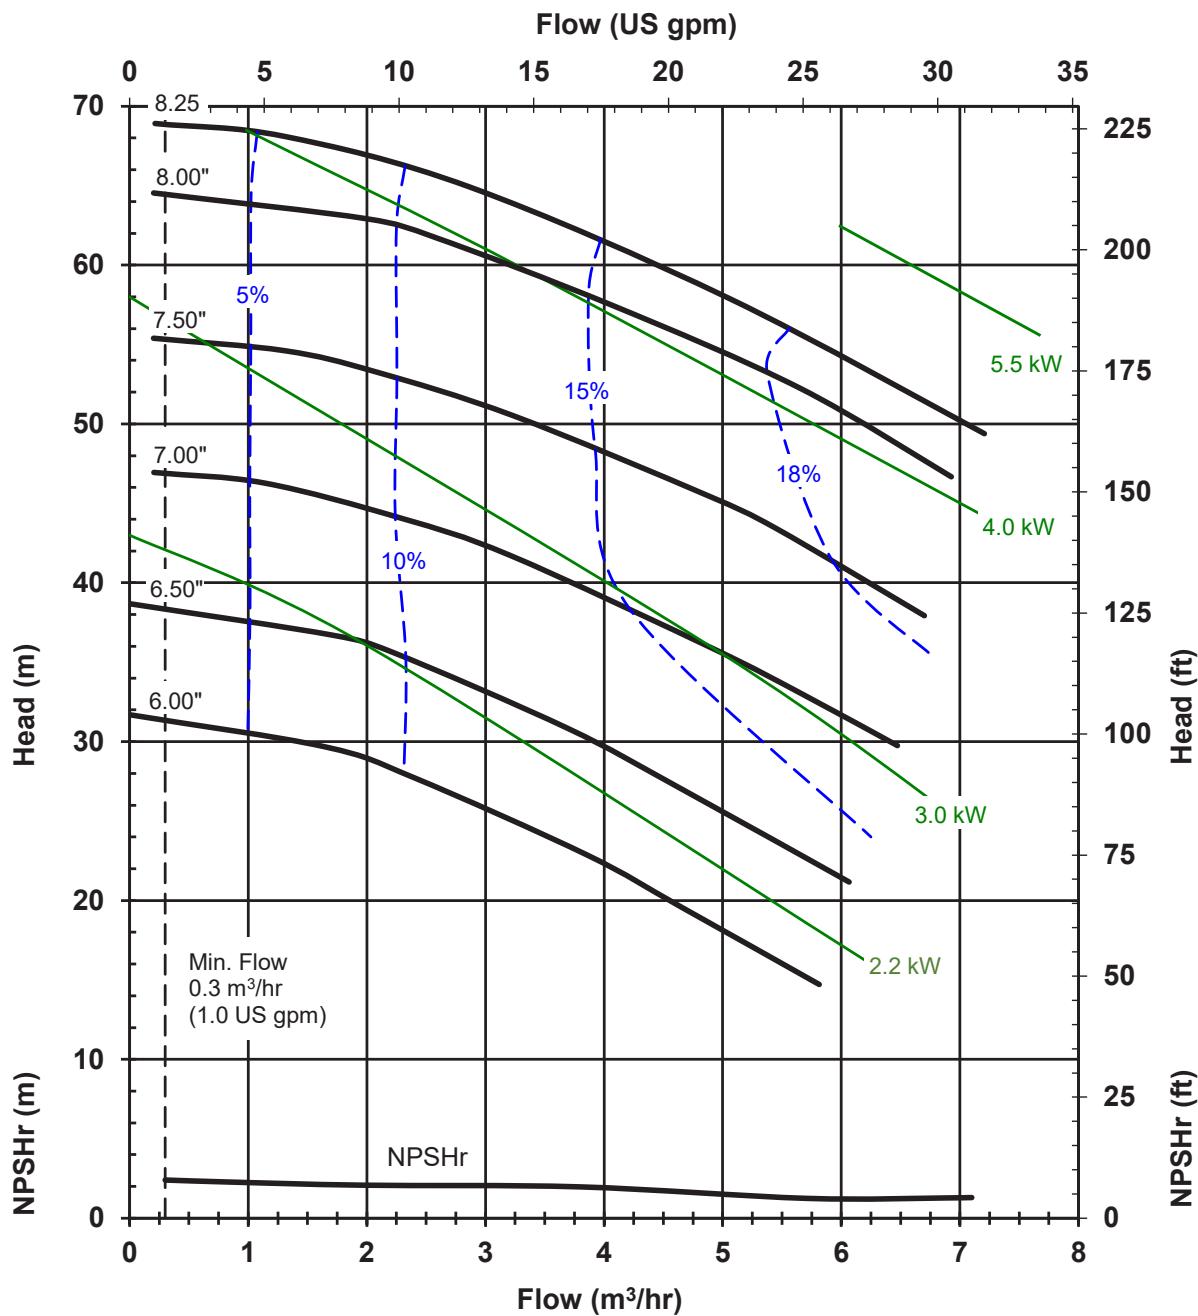

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC1518L
 1450 rpm, 50 Hz
 Suction: 1.5"
 Discharge: 1"
 S.G. 1.0

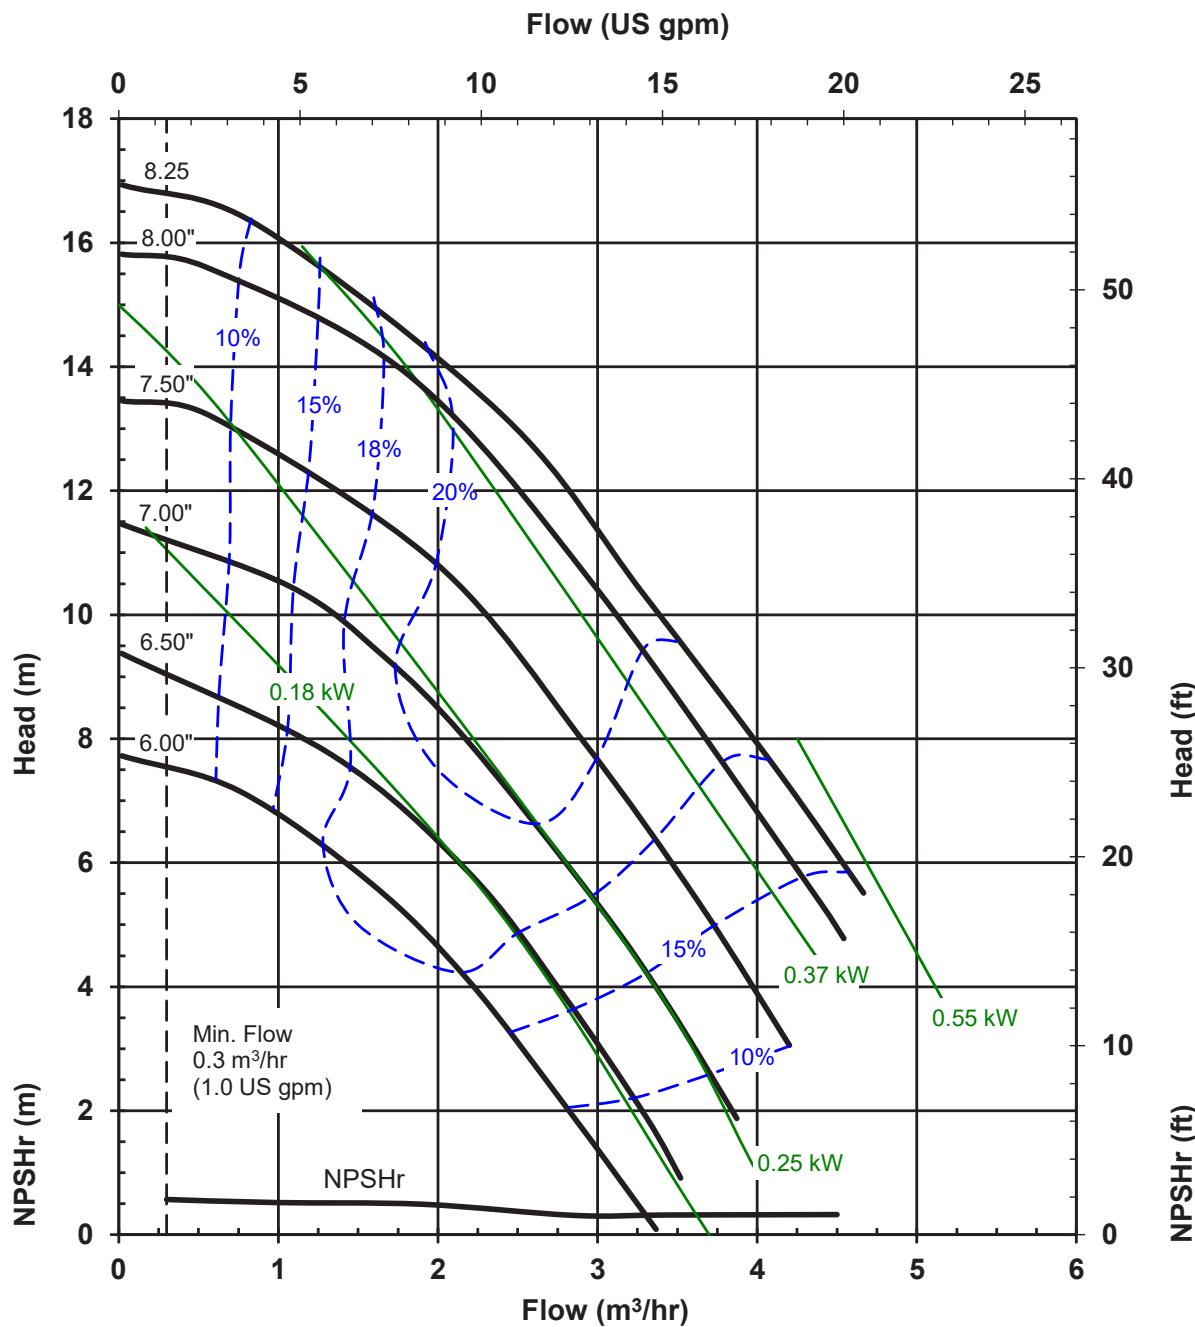

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC2110
 3500 rpm, 60 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

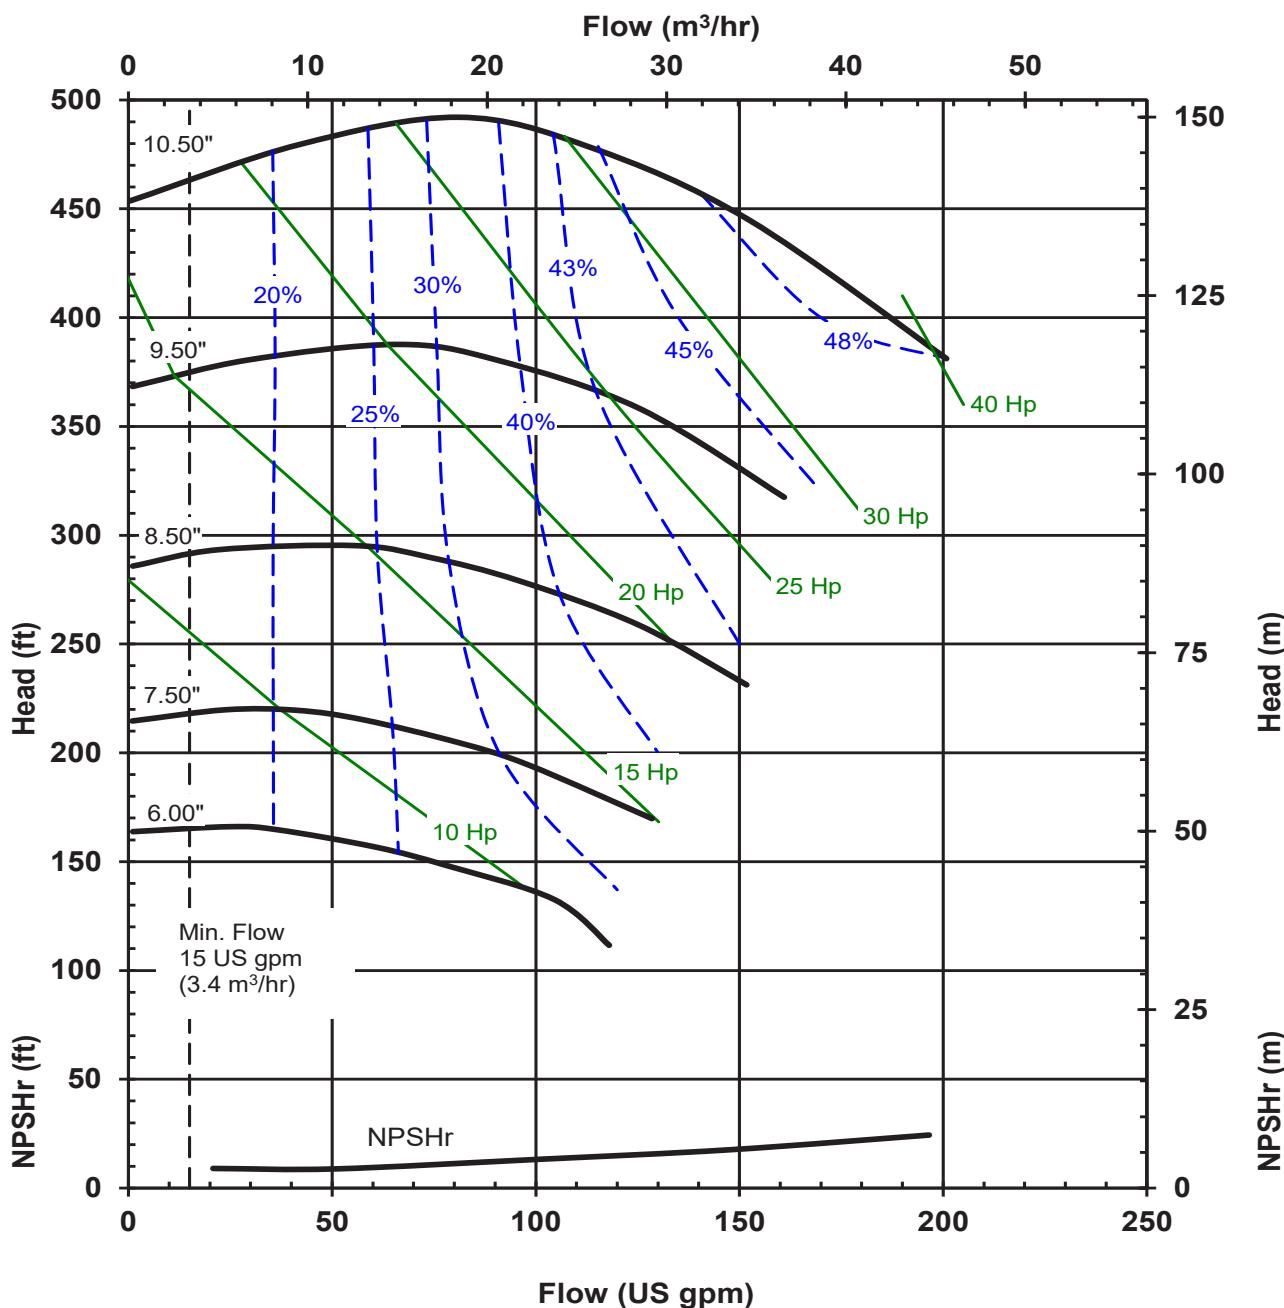

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC2110
 1750 rpm, 60 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

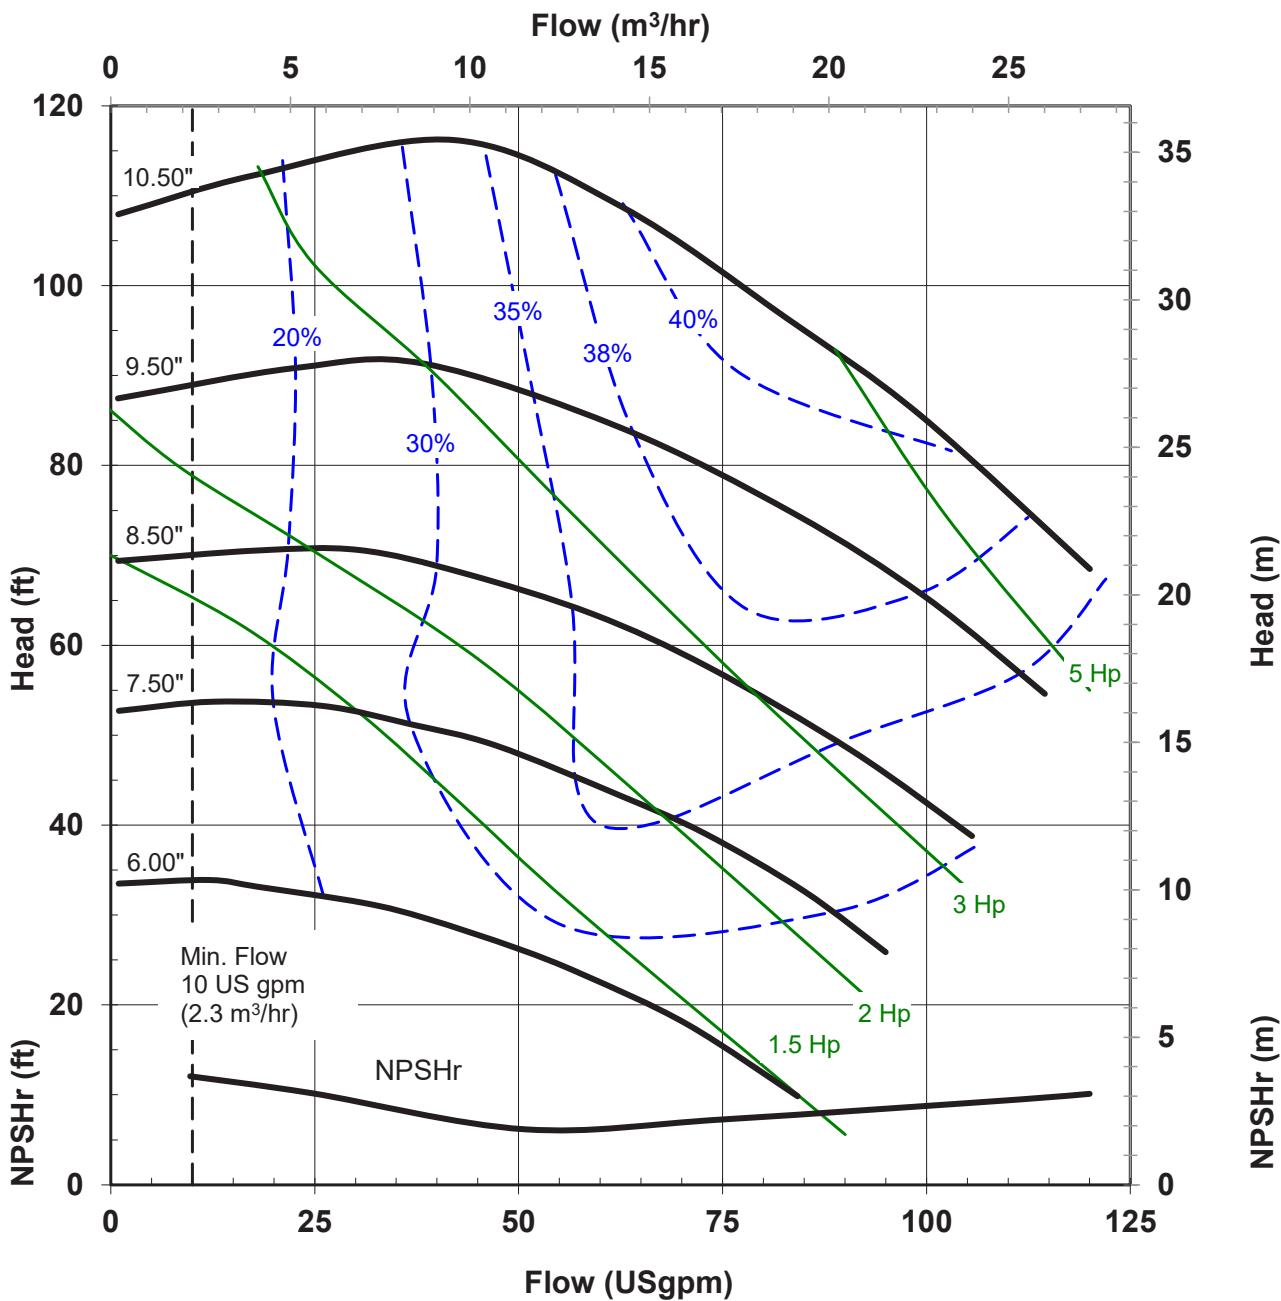

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC2110
 2900 rpm, 50 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

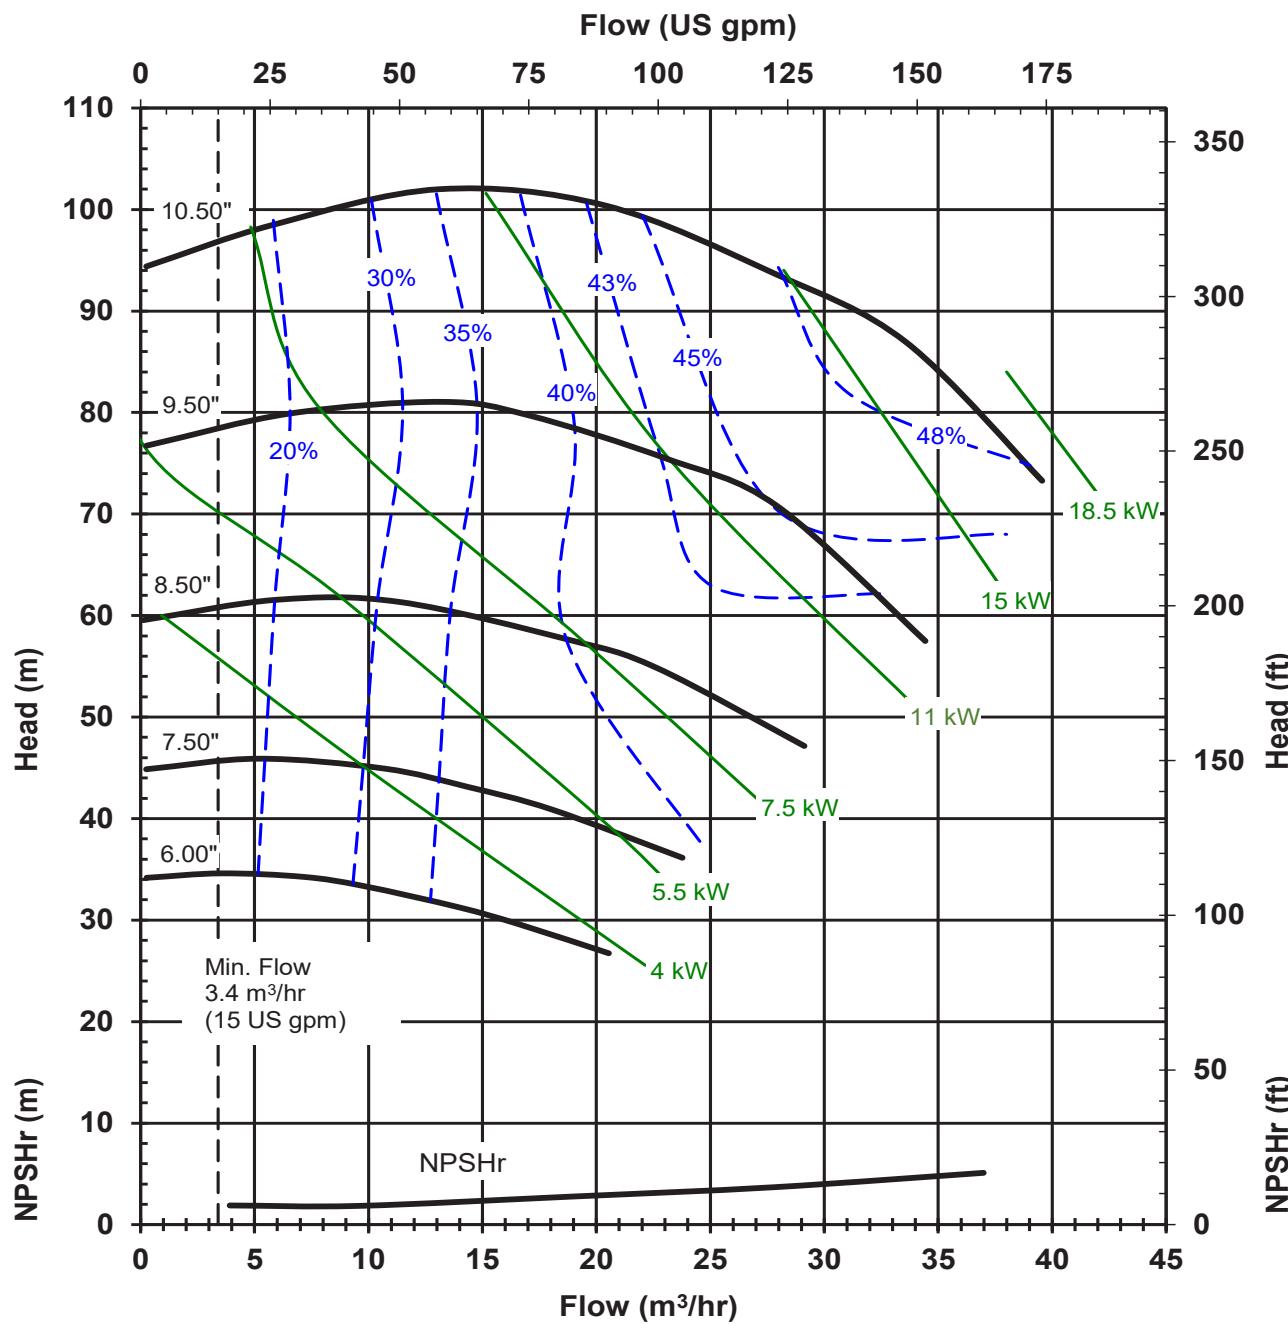

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC2110
 1450 rpm, 50 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

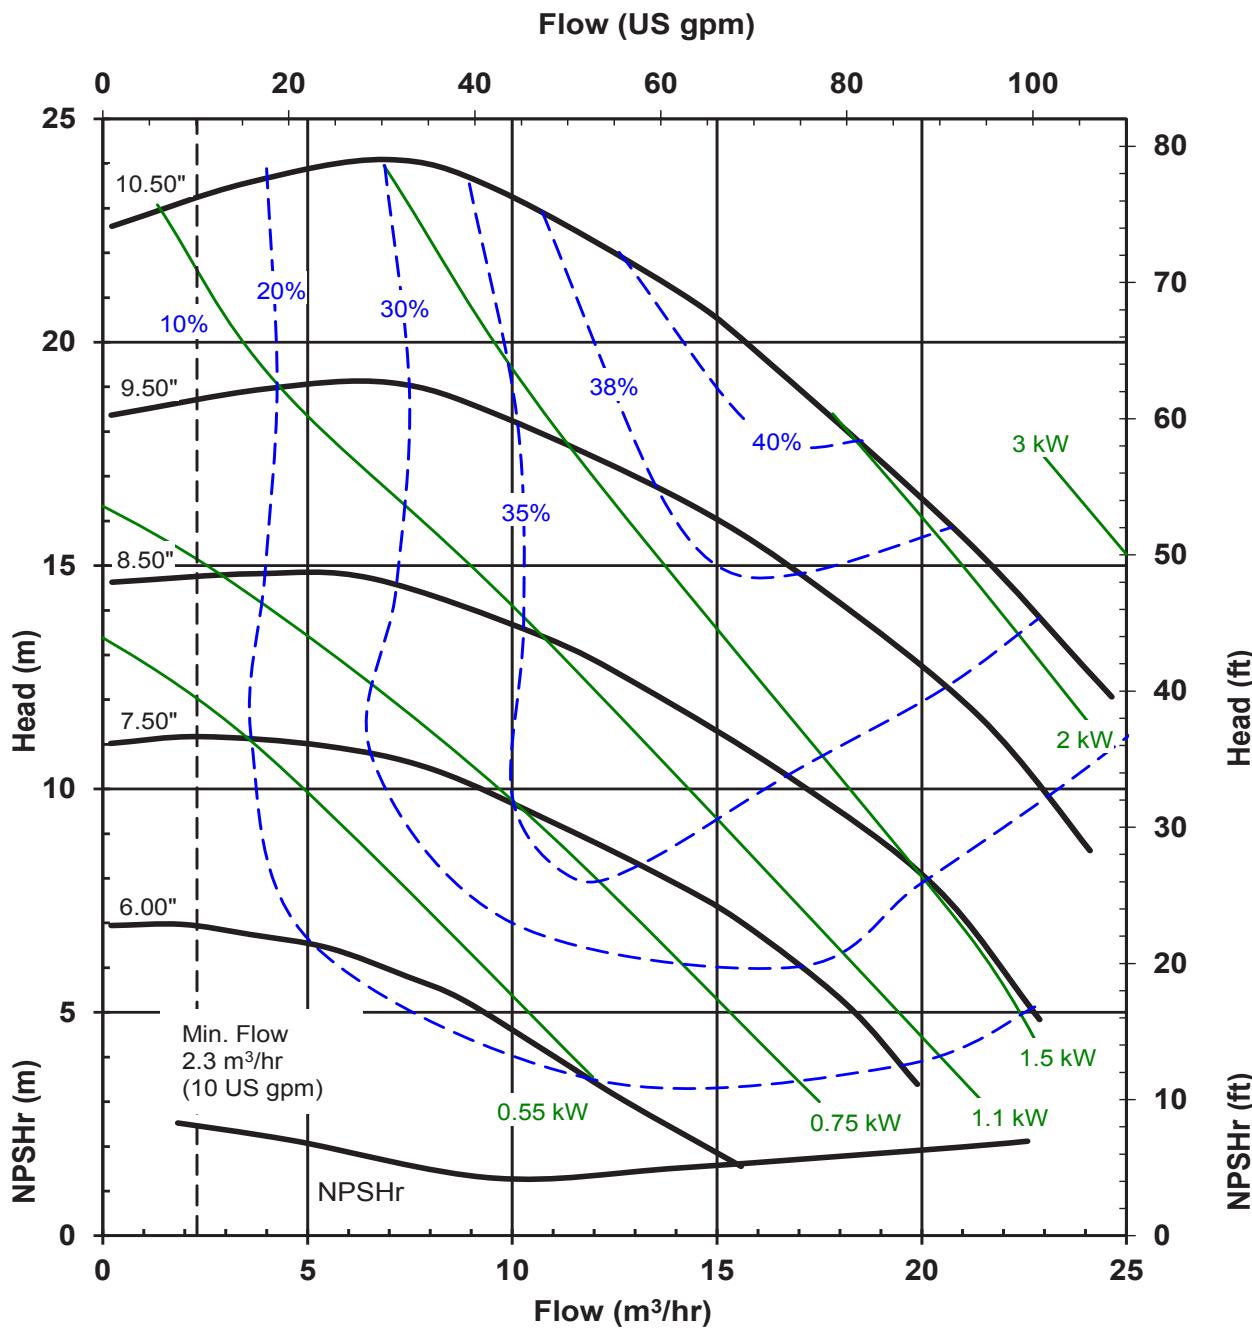

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC2110L
 3500 rpm, 60 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

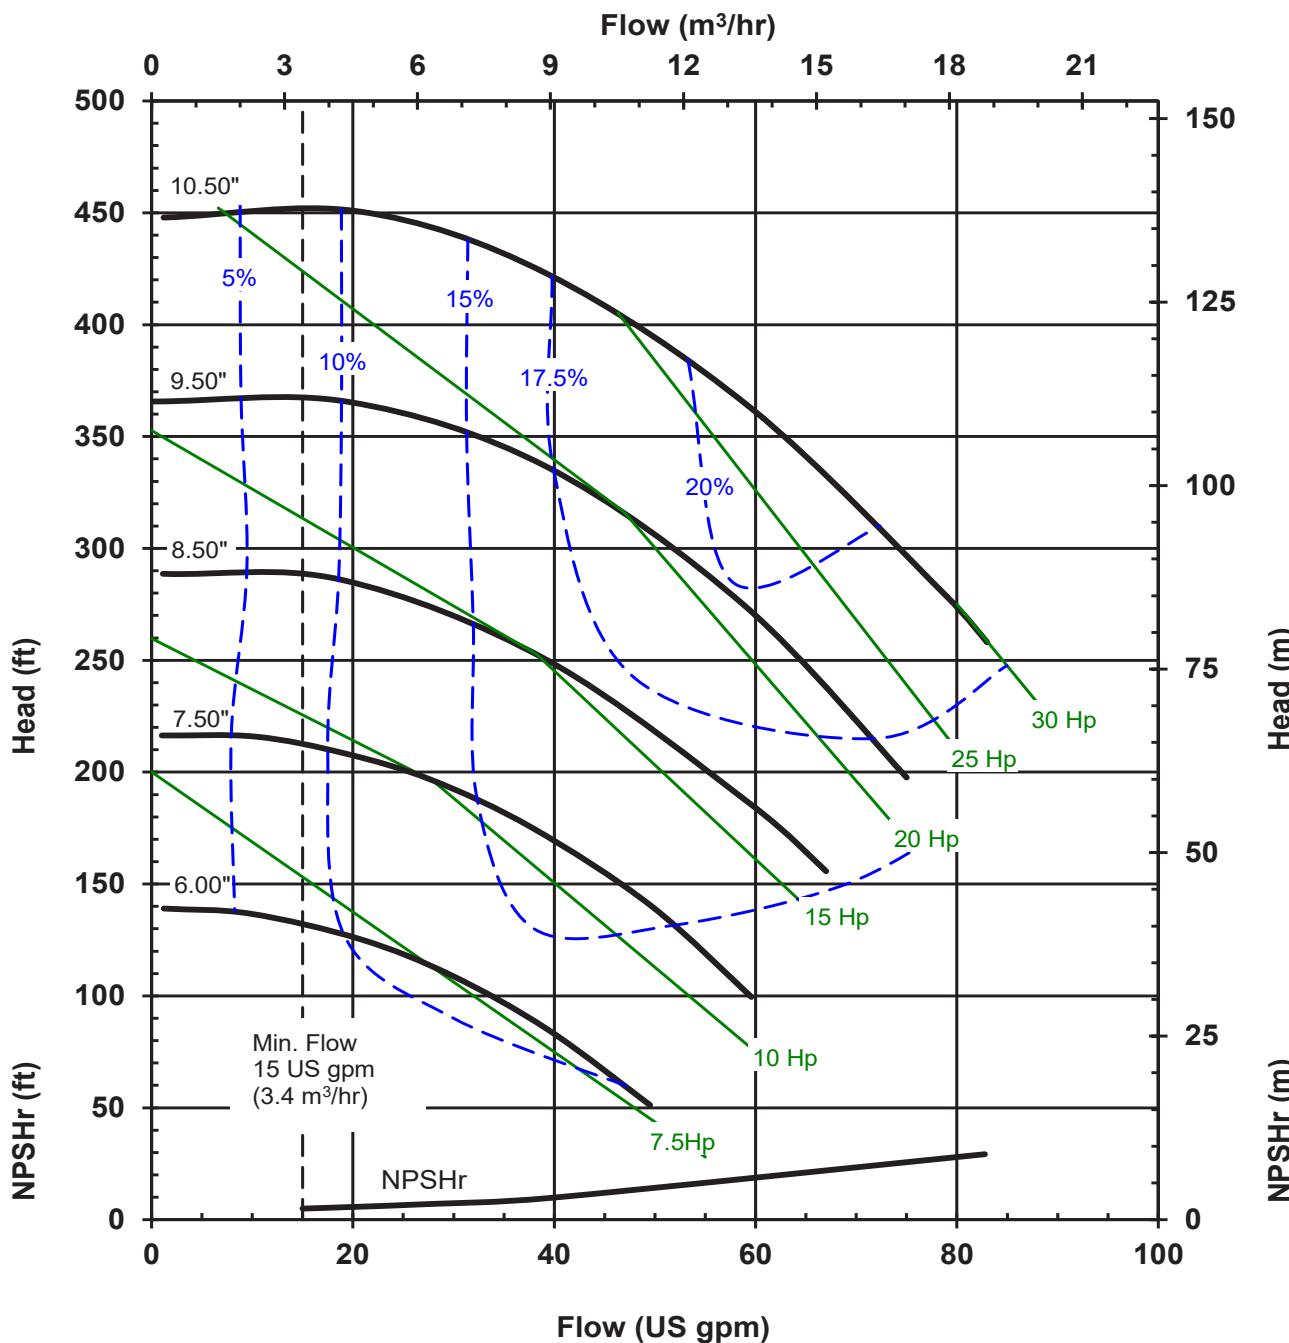

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC2110L
 1750 rpm, 60 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

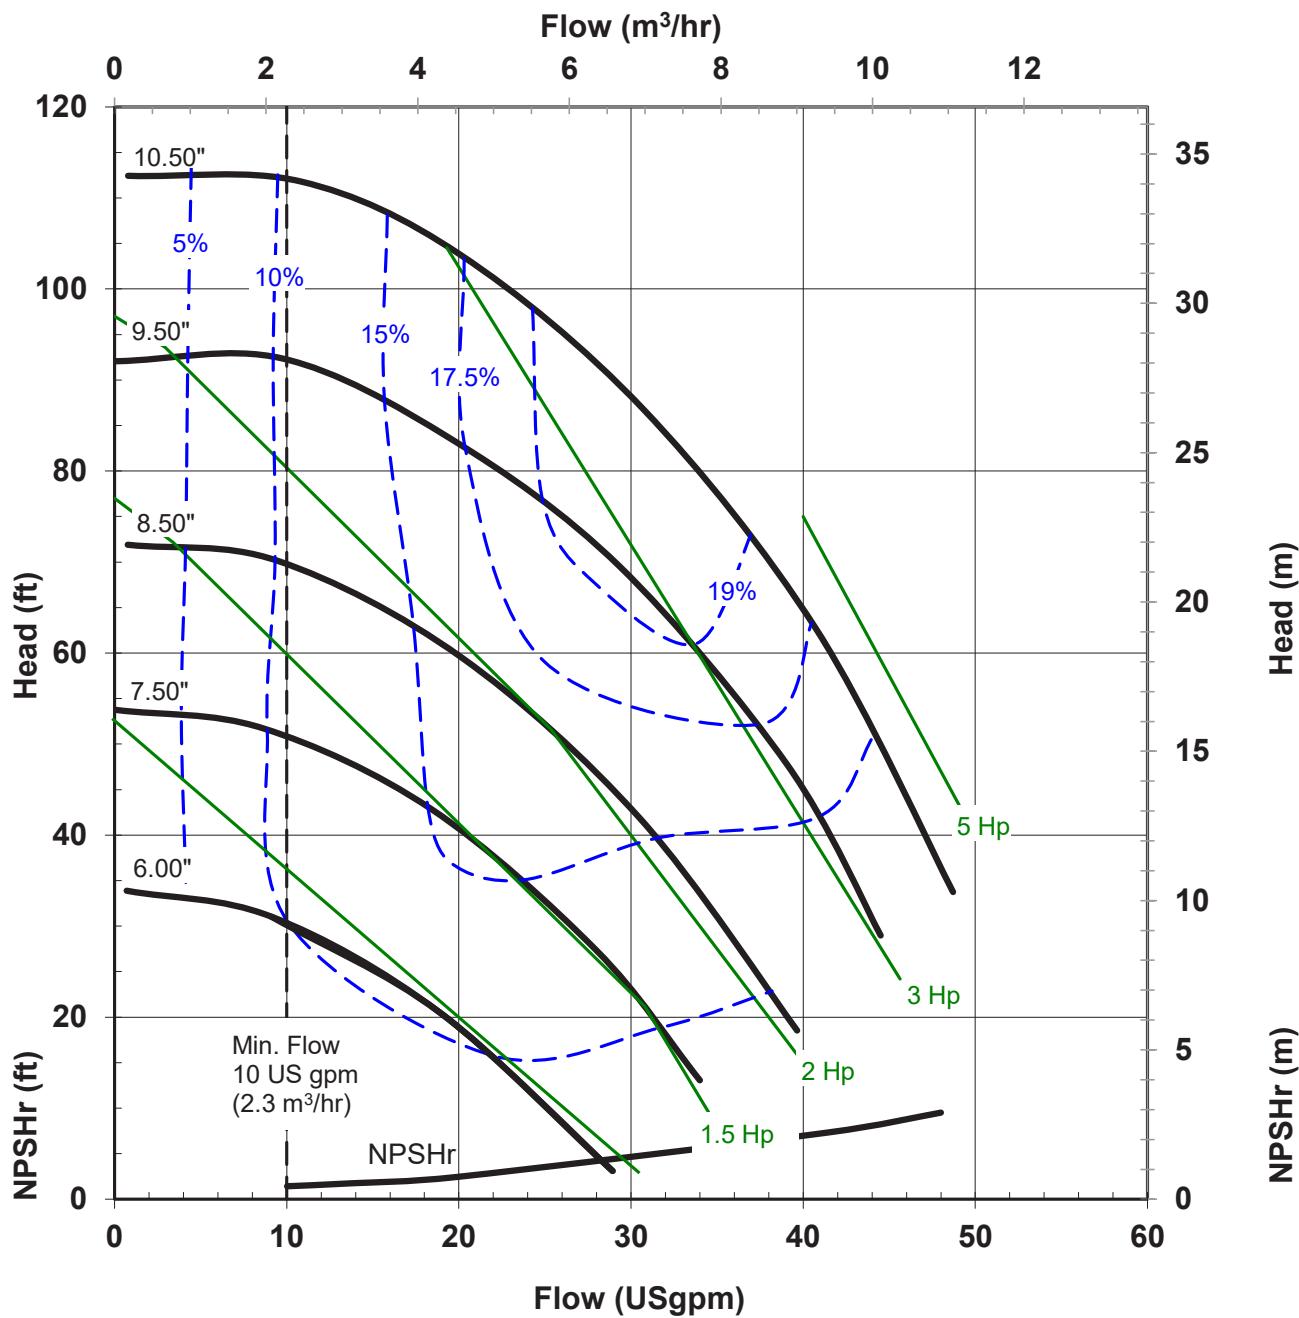

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC2110L
 2900 rpm, 50 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

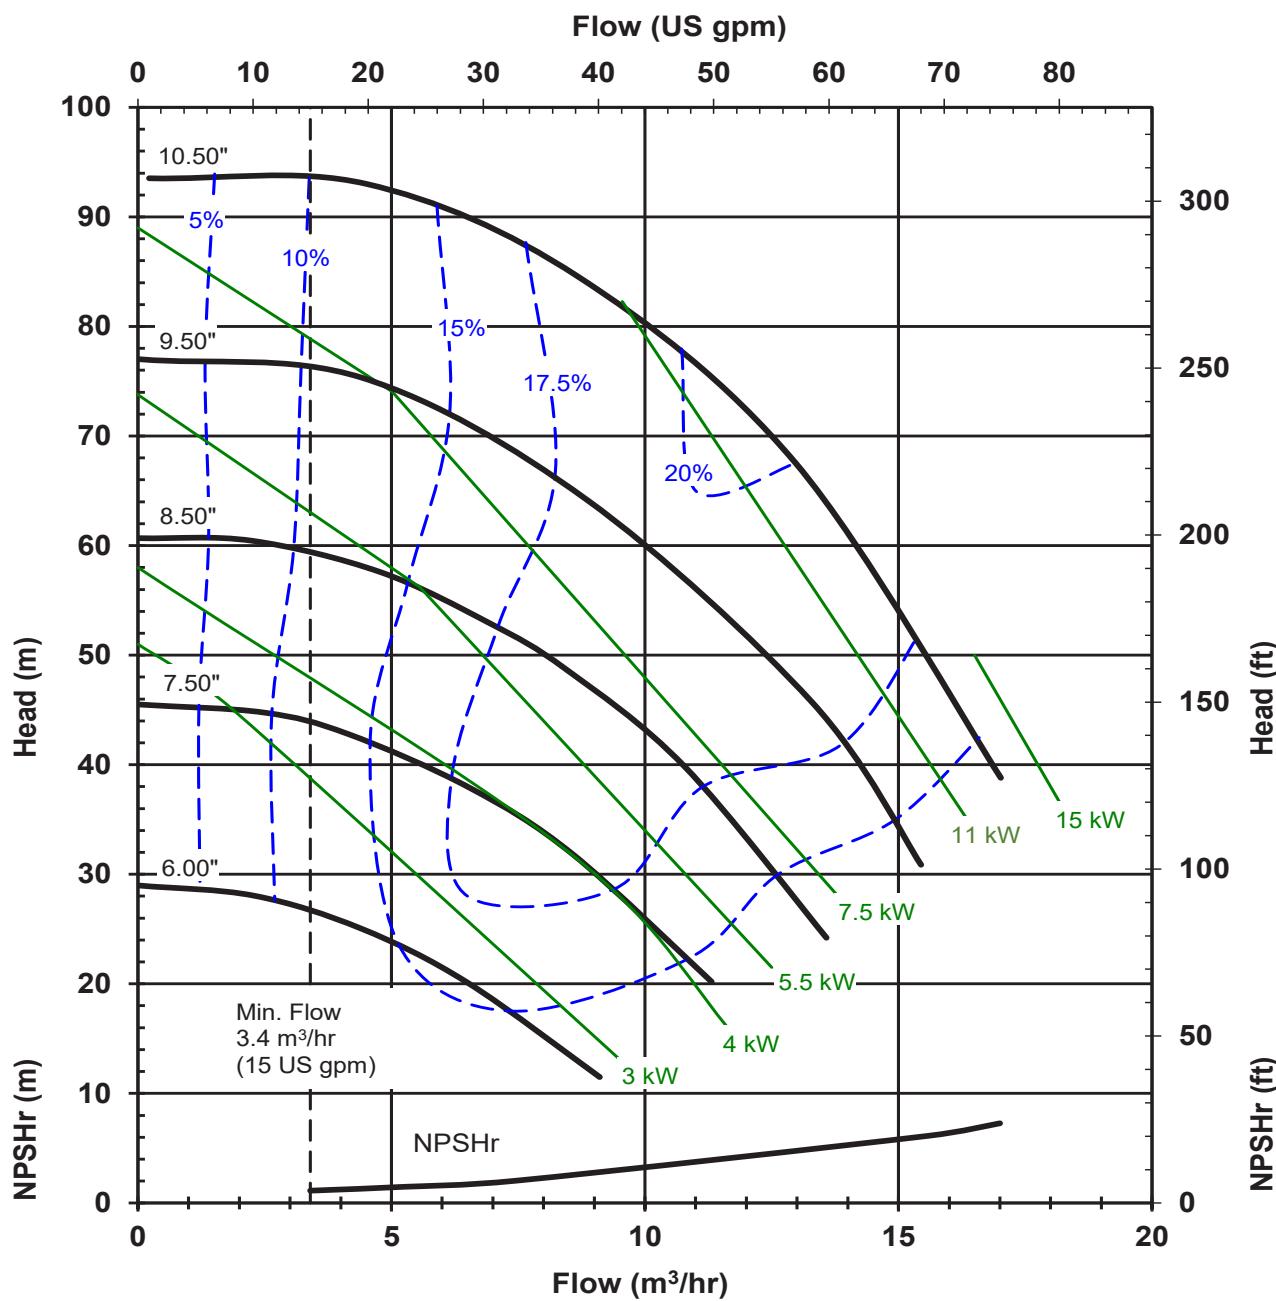

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC2110L
 1450 rpm, 50 Hz
 Suction: 2"
 Discharge: 1"
 S.G. 1.0

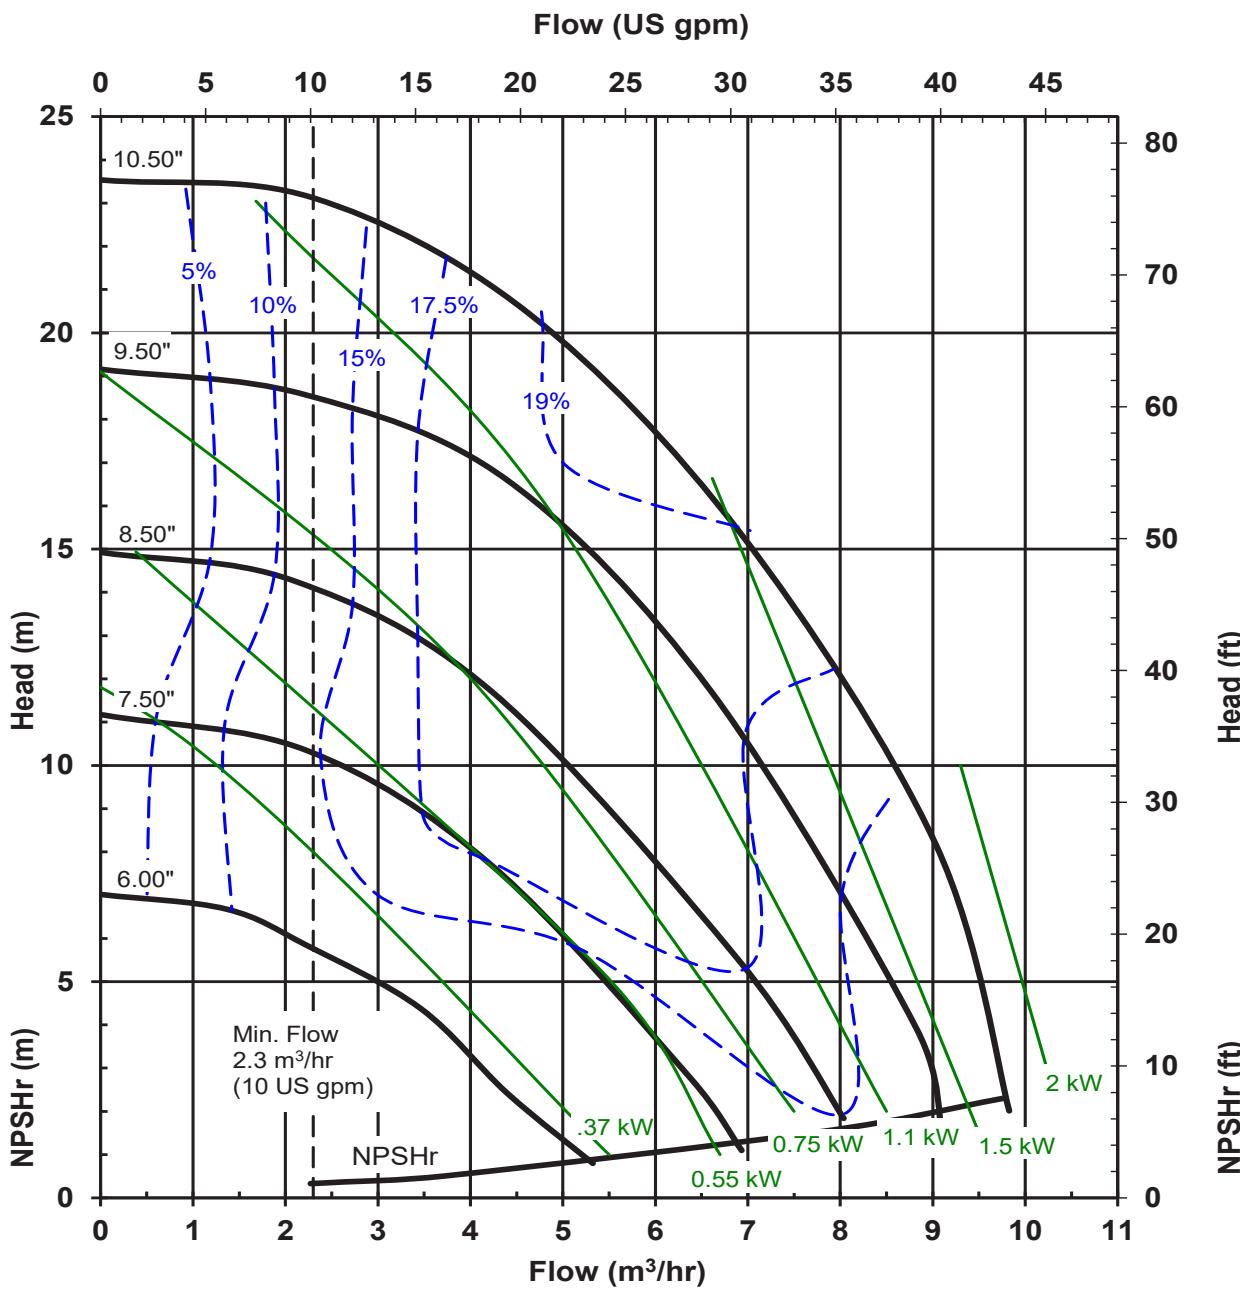

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC3110
 3500 rpm, 60 Hz
 Suction: 3"
 Discharge: 1"
 S.G. 1.0

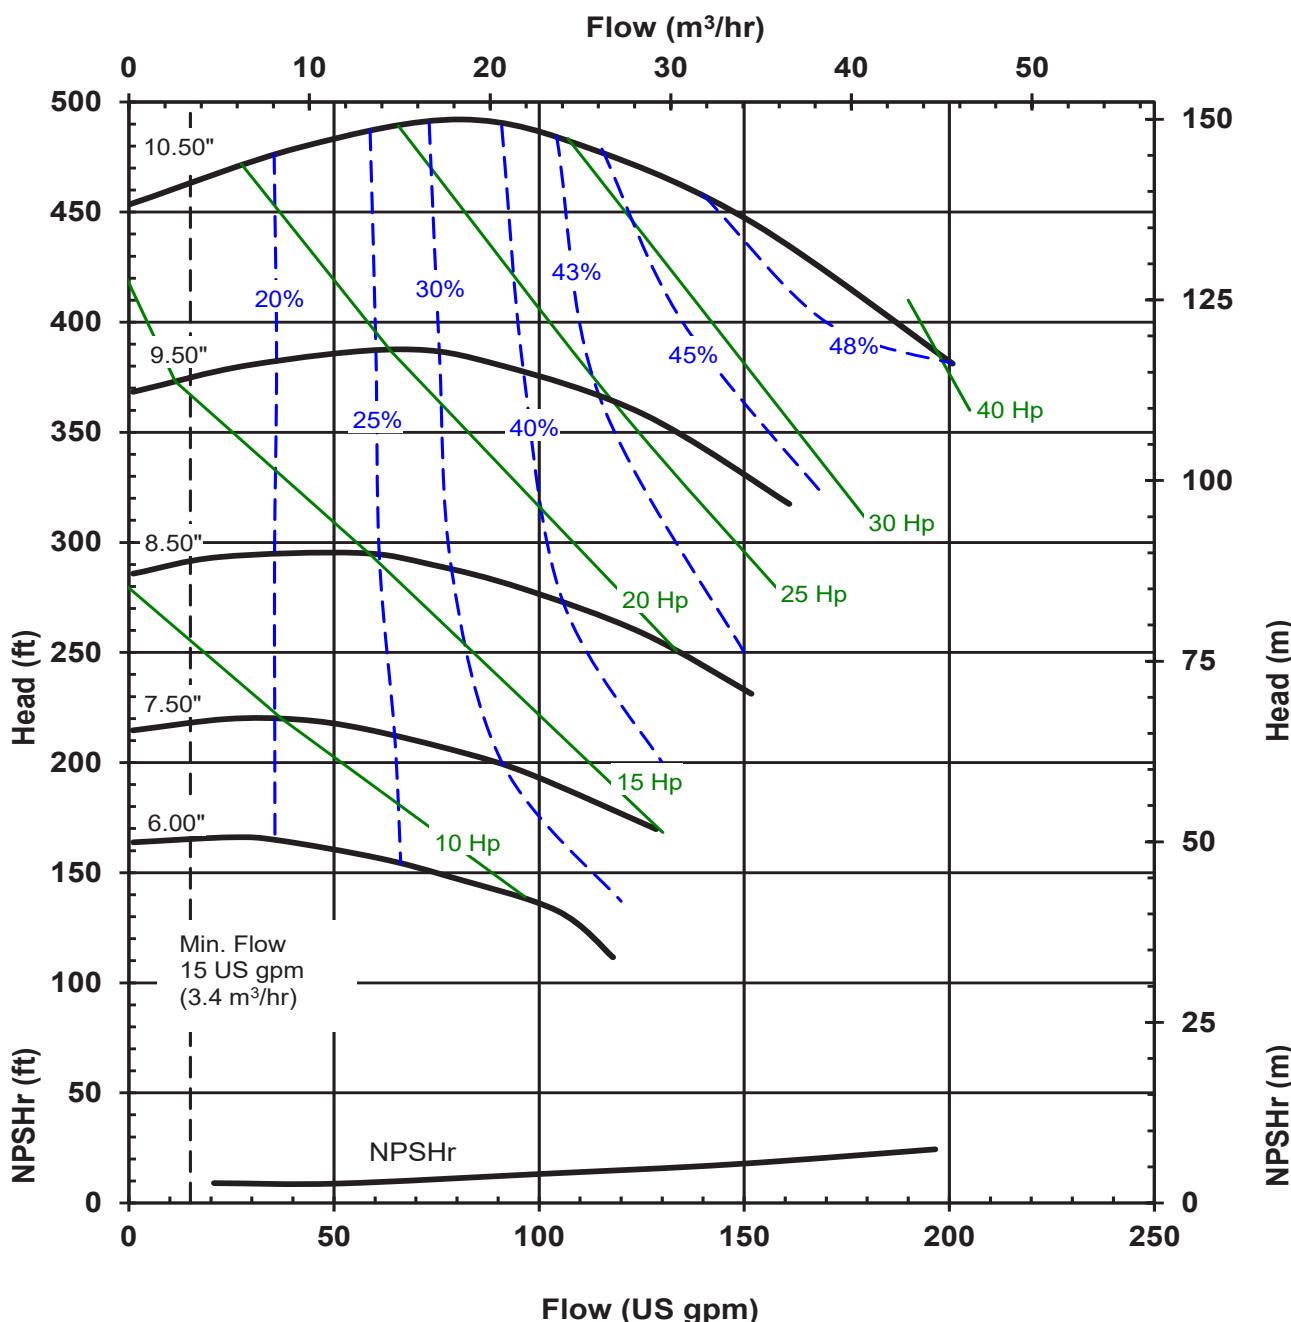

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC3110
 1750 rpm, 60 Hz
 Suction: 3"
 Discharge: 1"
 S.G. 1.0

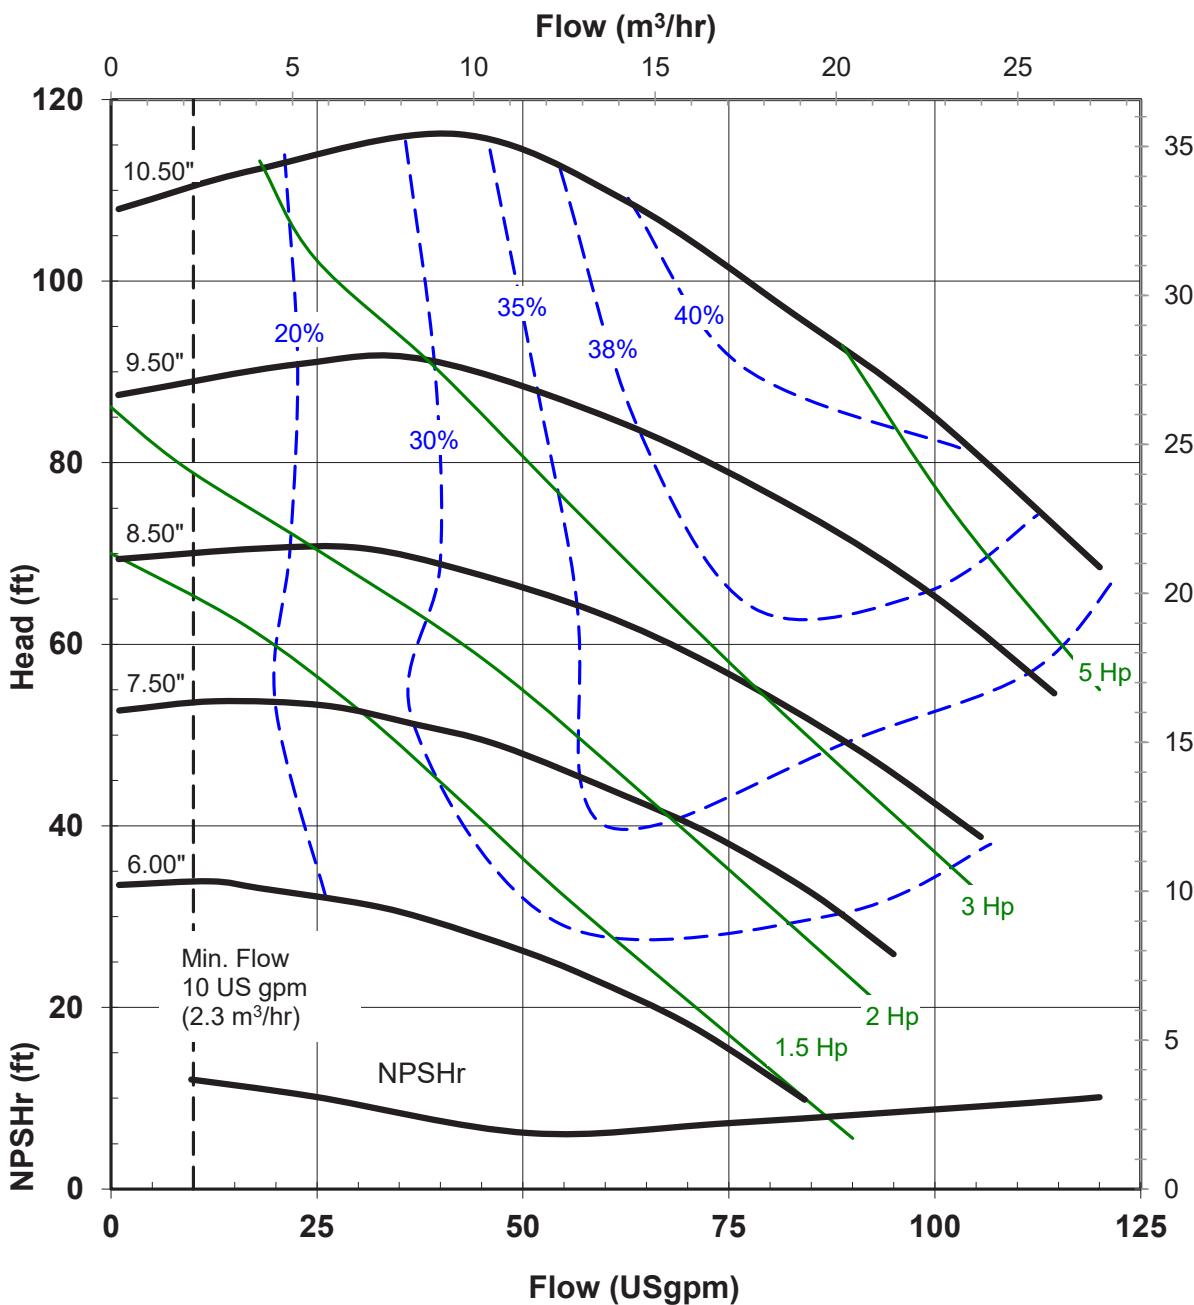

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC3110
 2900 rpm, 50 Hz
 Suction: 3"
 Discharge: 1"
 S.G. 1.0

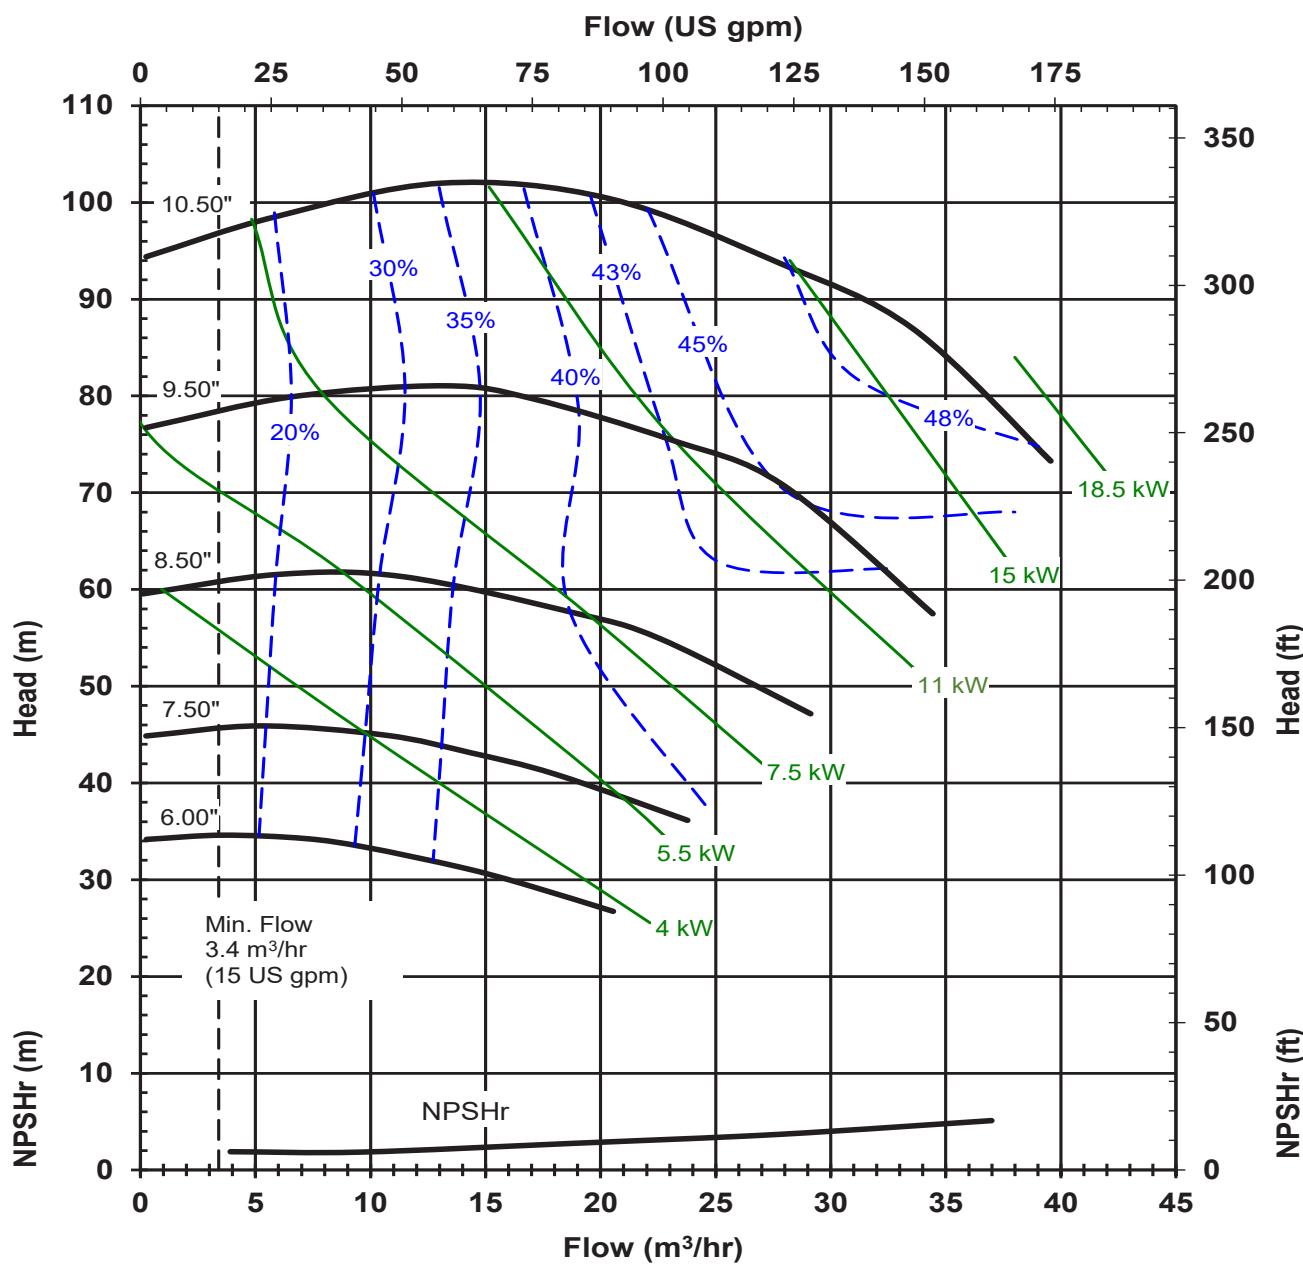

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC3110
 1450 rpm, 50 Hz
 Suction: 3"
 Discharge: 1"
 S.G. 1.0

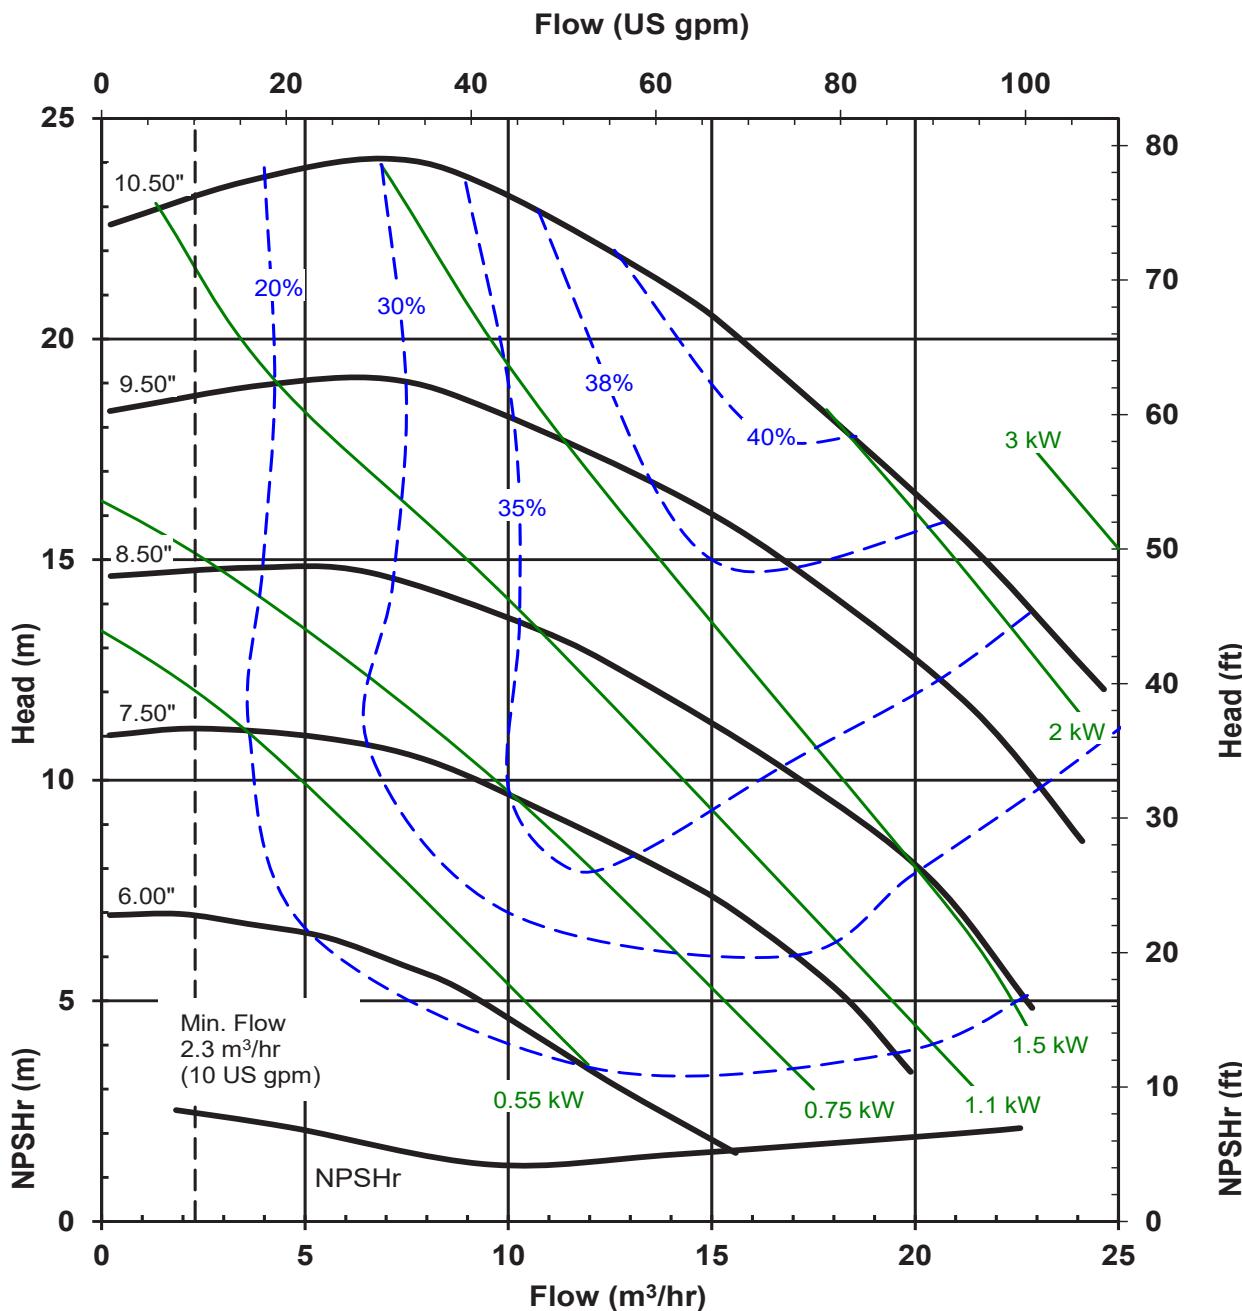

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE

MODEL: UC3156
 3500 rpm, 60 Hz
 Suction: 3"
 Discharge: 1.5"
 S.G. 1.0

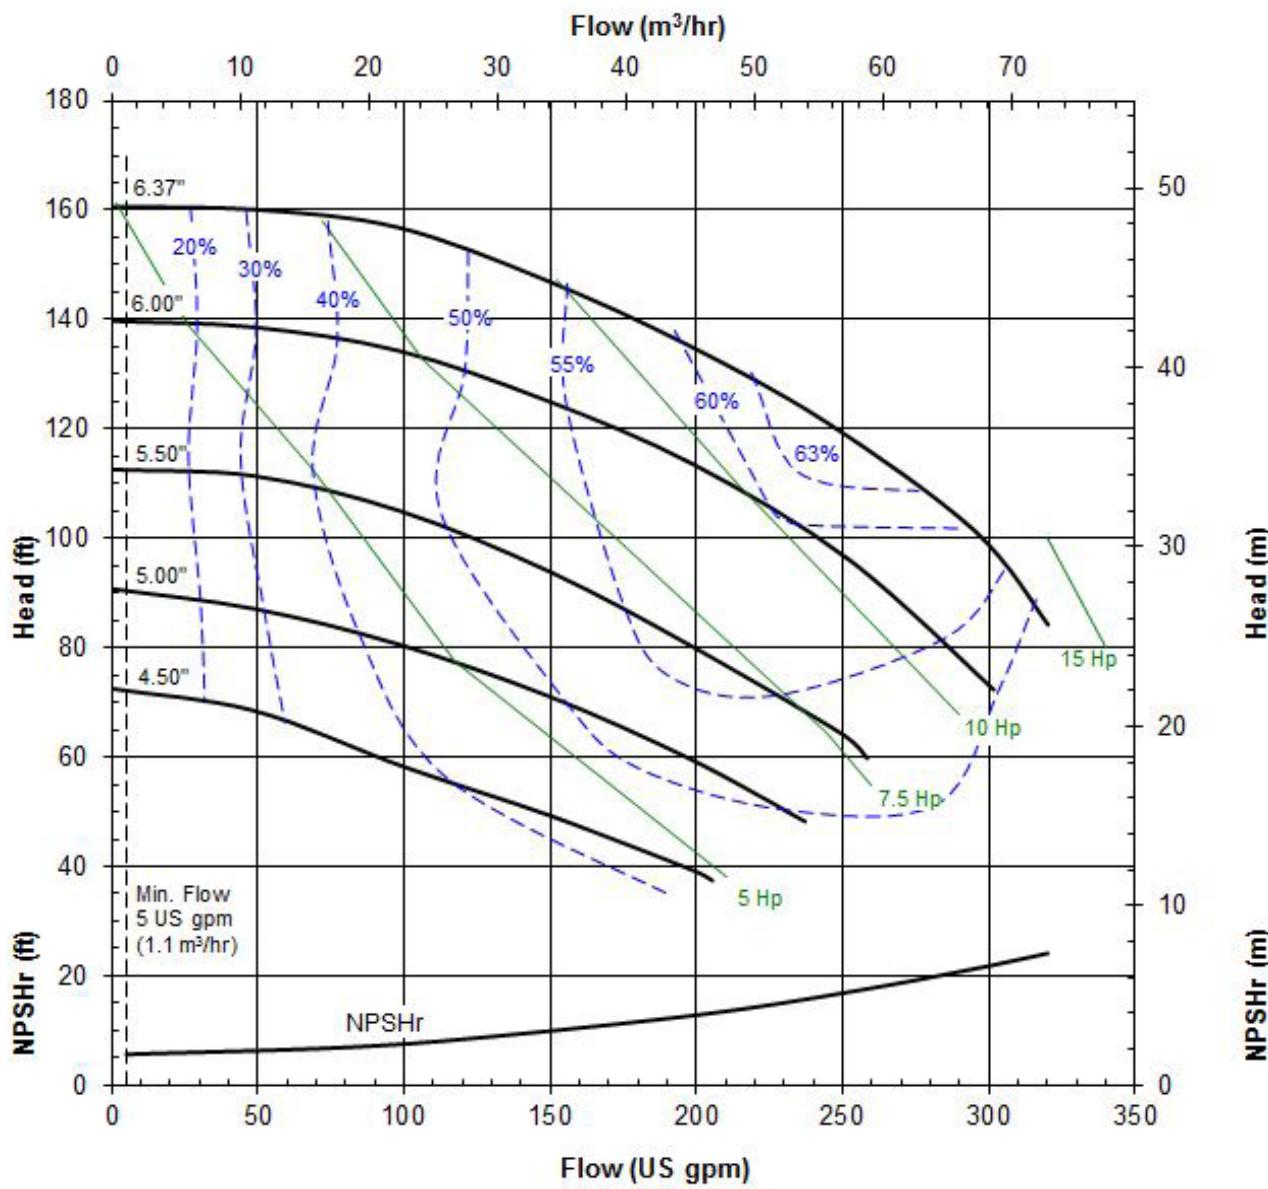

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC3156

1750 rpm, 60 Hz


Suction: 3"

Discharge: 1.5"


S.G. 1.0

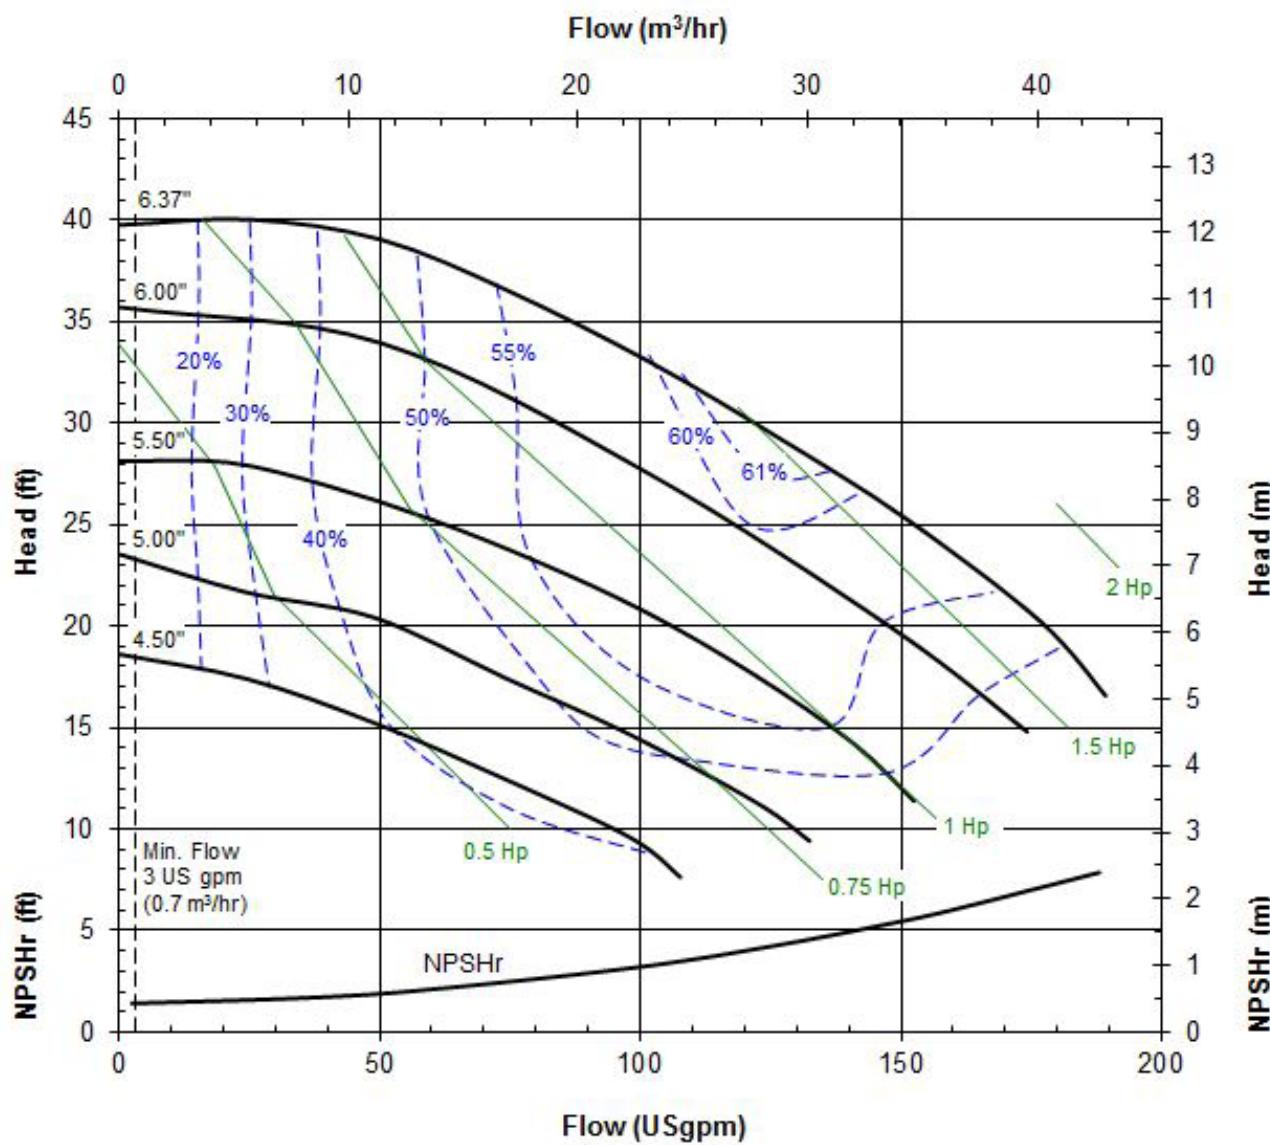

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

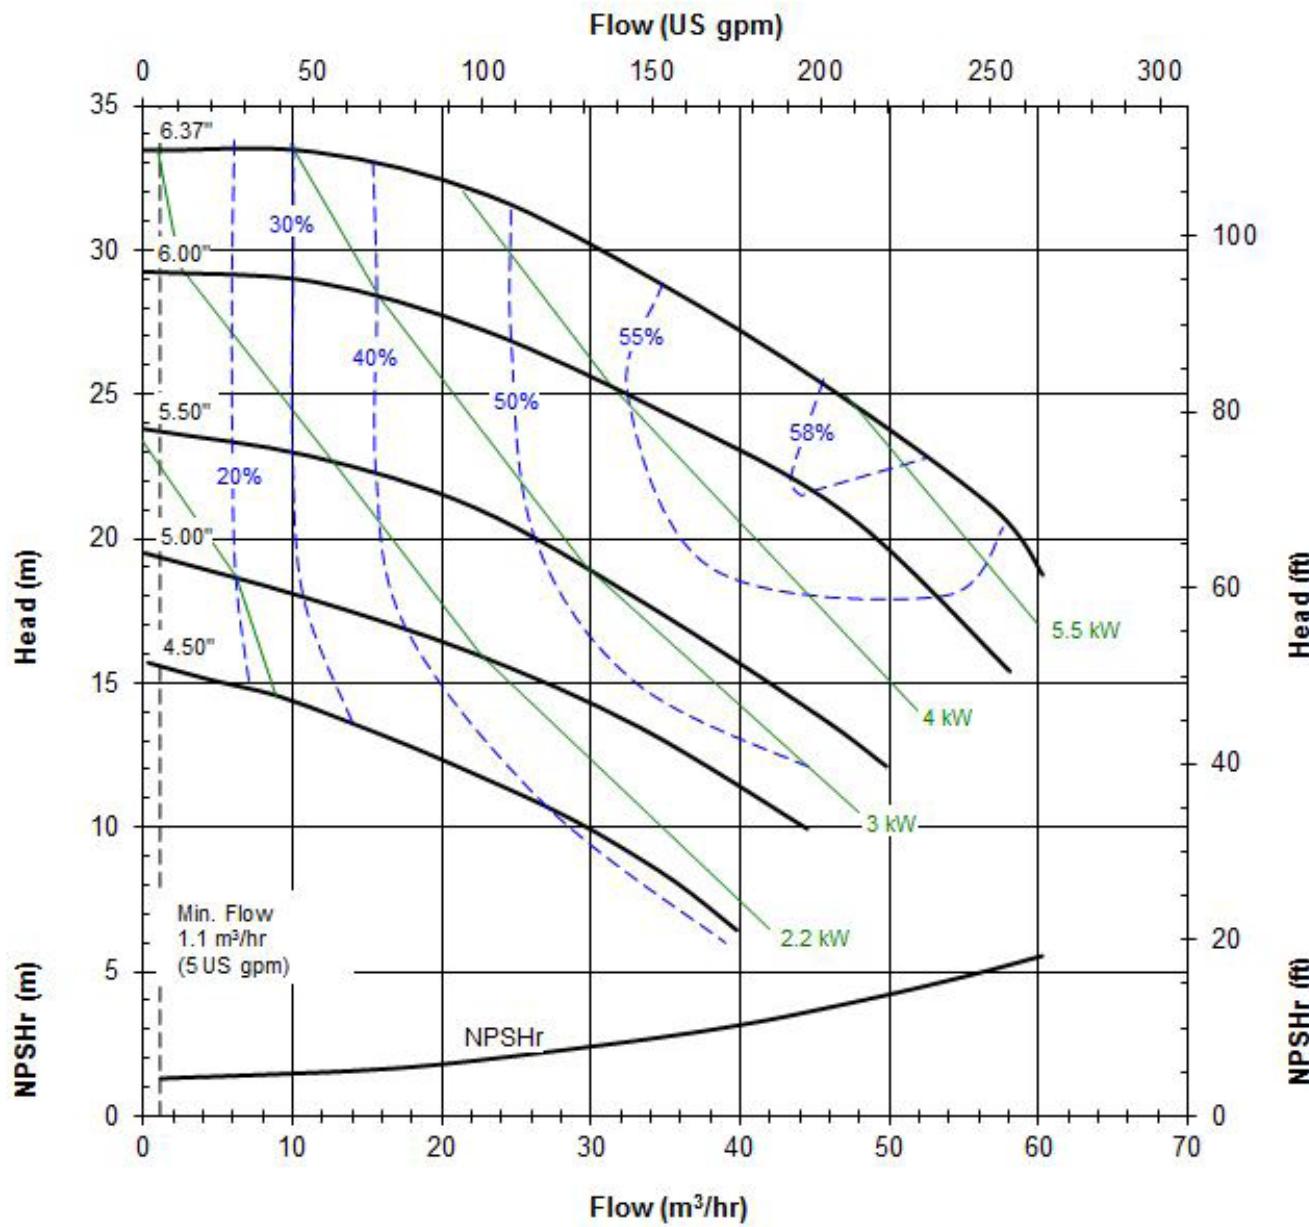**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**
MODEL: UC3156
2900 rpm, 50 Hz
Suction: 3"
Discharge: 1.5"
S.G. 1.0


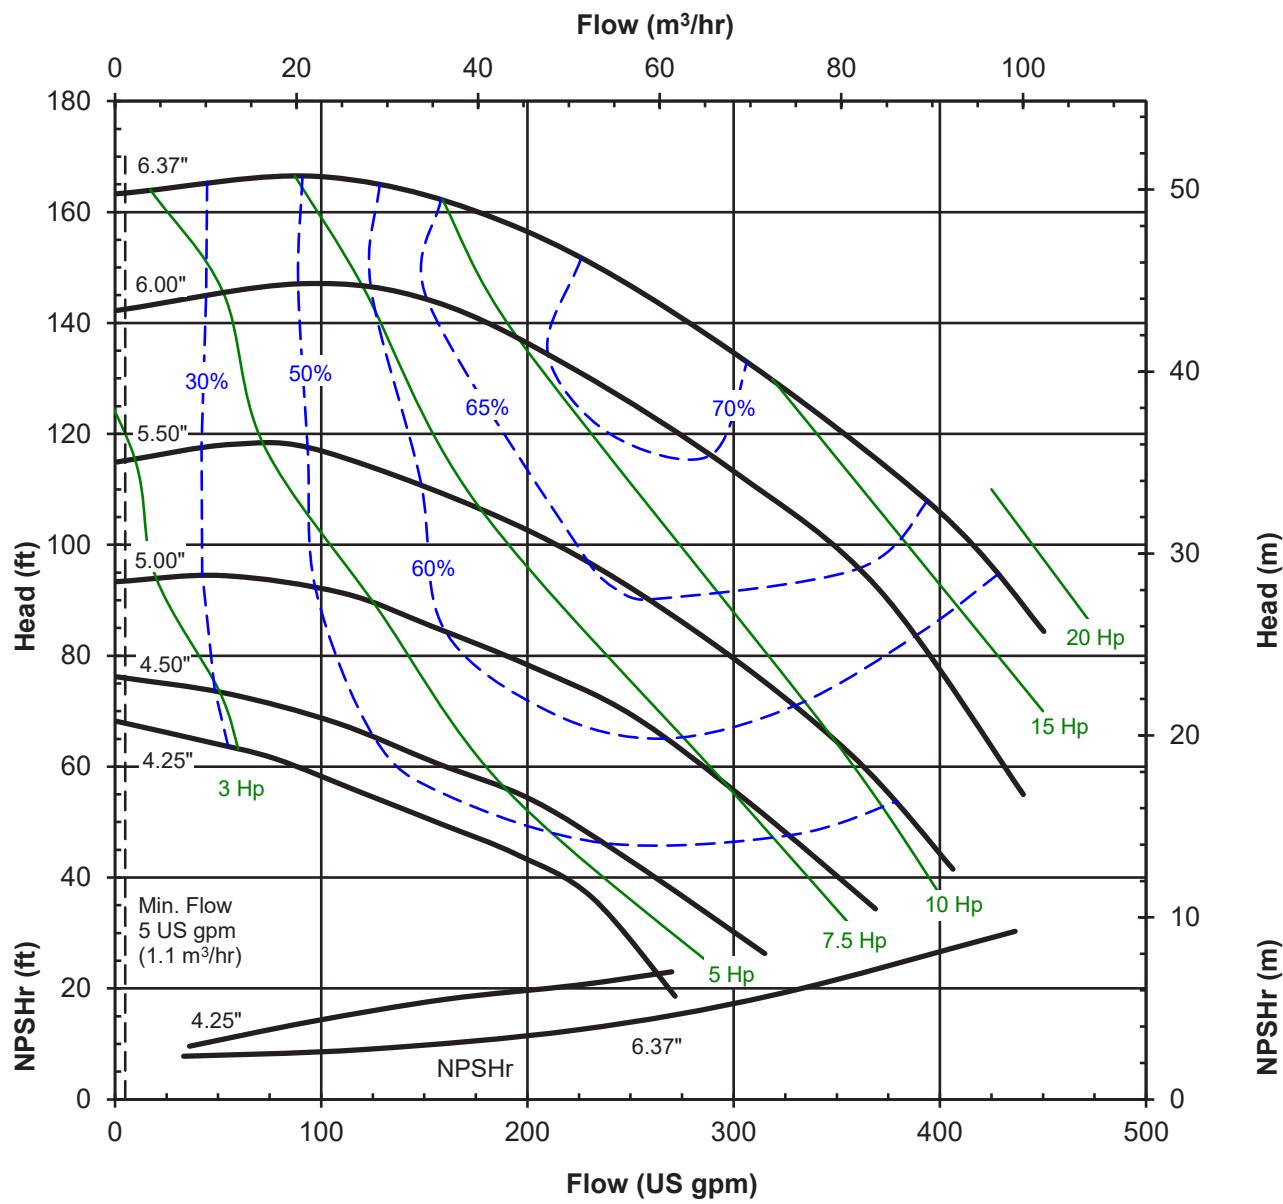
Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

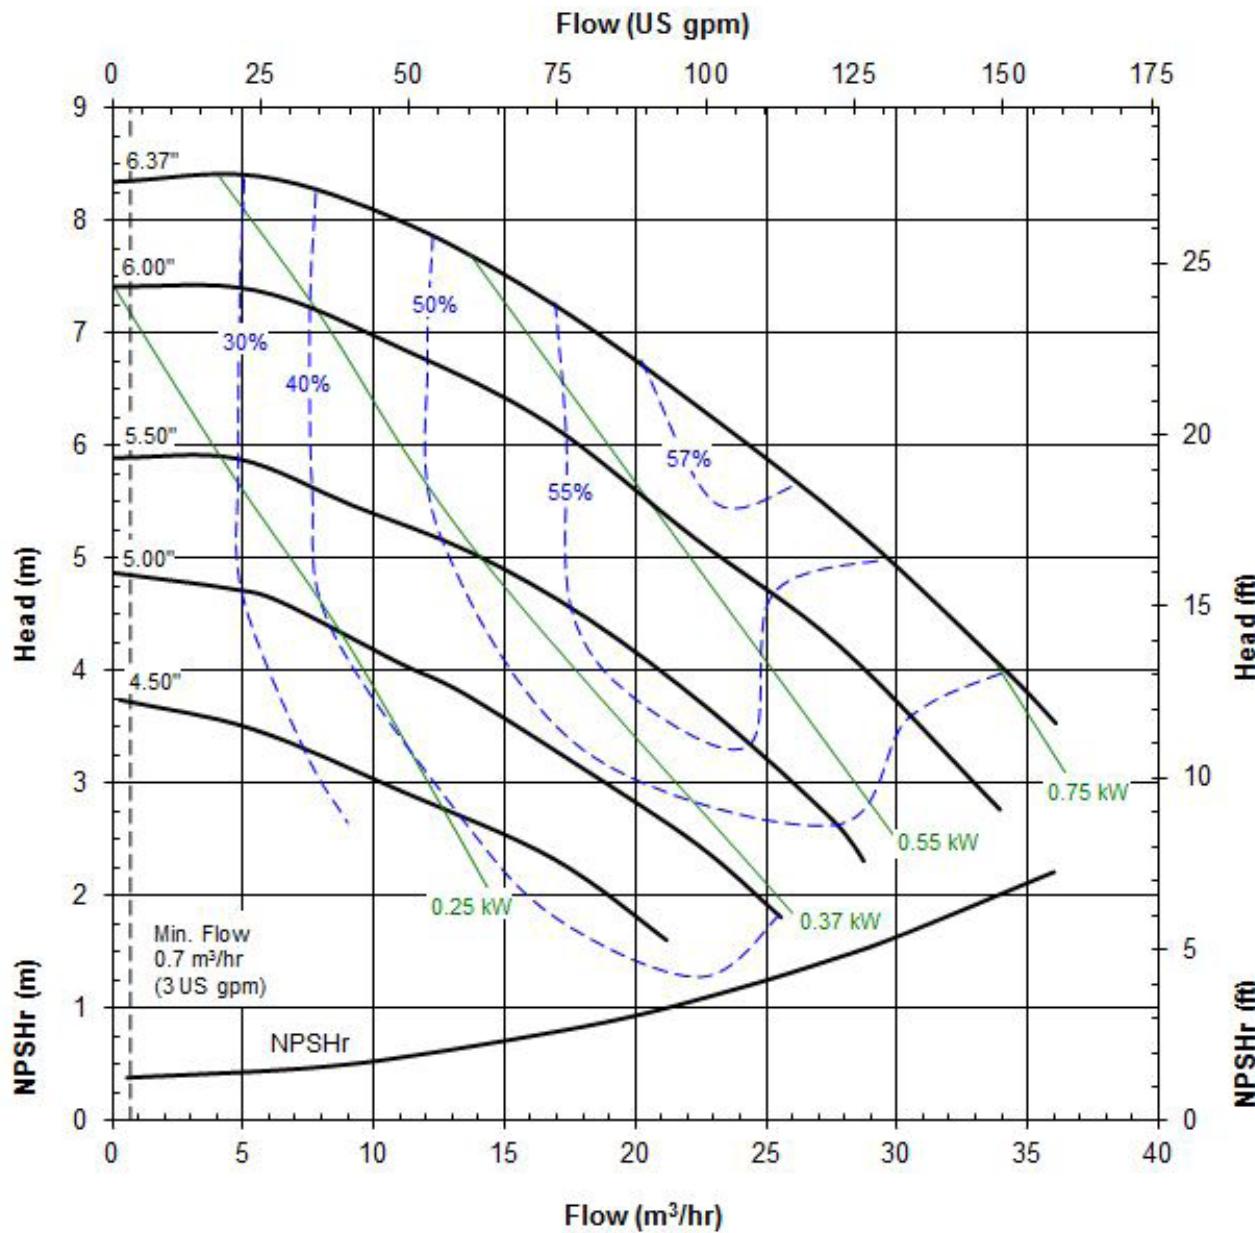**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**
MODEL: UC3156
1450 rpm, 50 Hz
Suction: 3"
Discharge: 1.5"
S.G. 1.0


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC326/326H
3500 rpm, 60 Hz
Suction: 3"
Discharge: 2"
S.G. 1.0



Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC326/326H
1750 rpm, 60 Hz
Suction: 3"
Discharge: 2"
S.G. 1.0

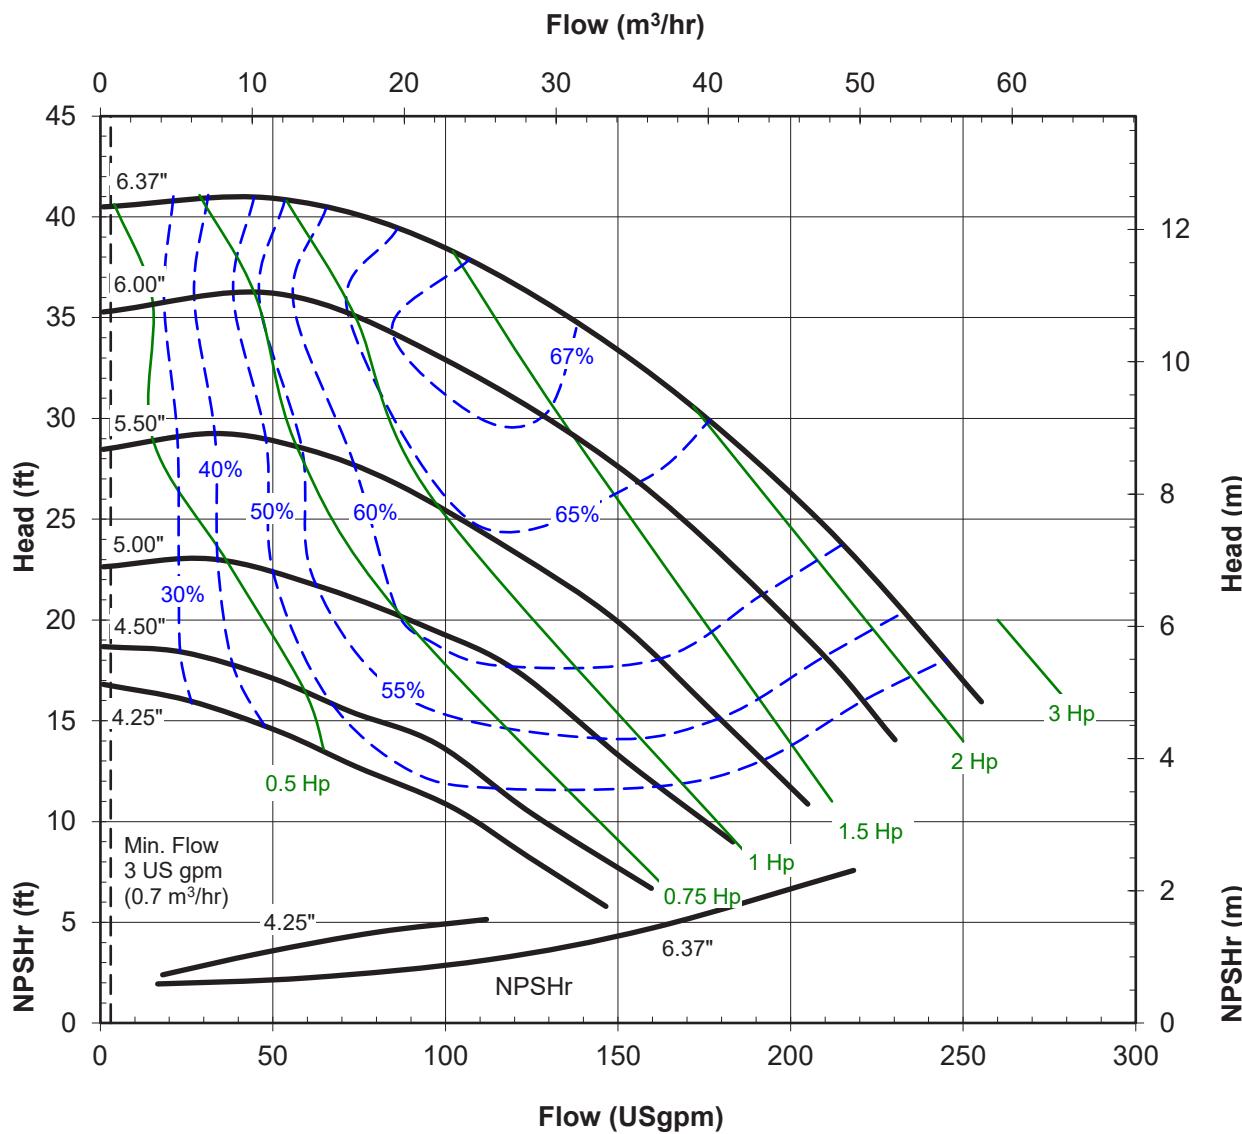

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC326/326H
2900 rpm, 50 Hz
Suction: 3"
Discharge: 2"
S.G. 1.0

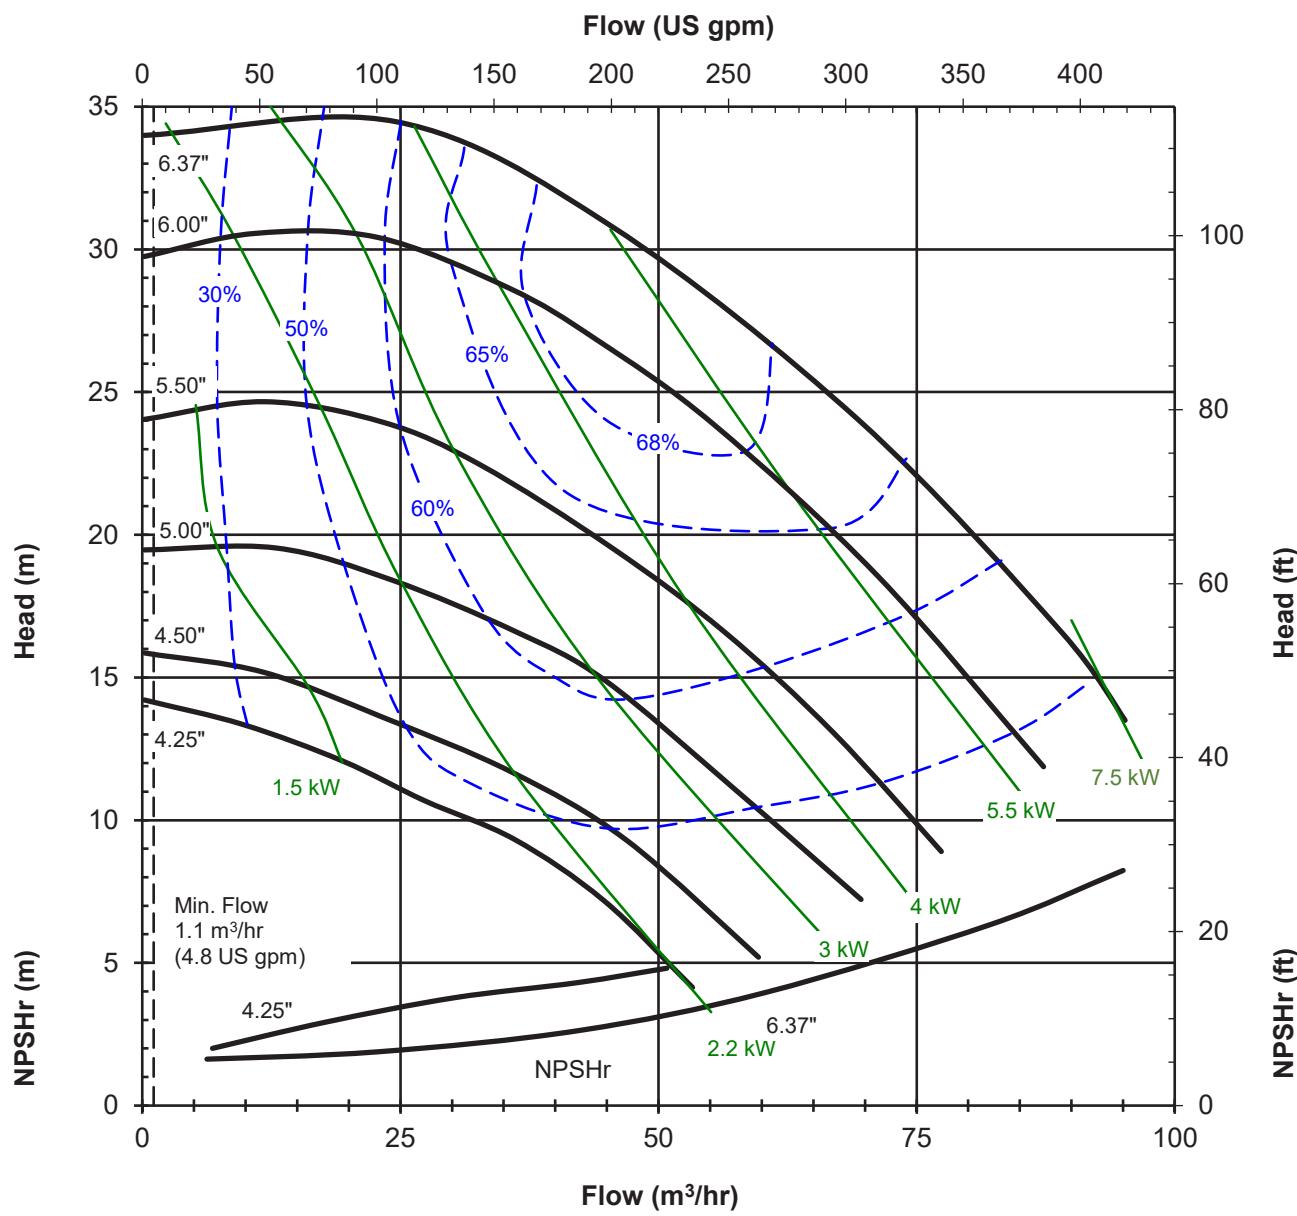

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC326/326H
 1450 rpm, 50 Hz
 Suction: 3"
 Discharge: 2"
 S.G. 1.0

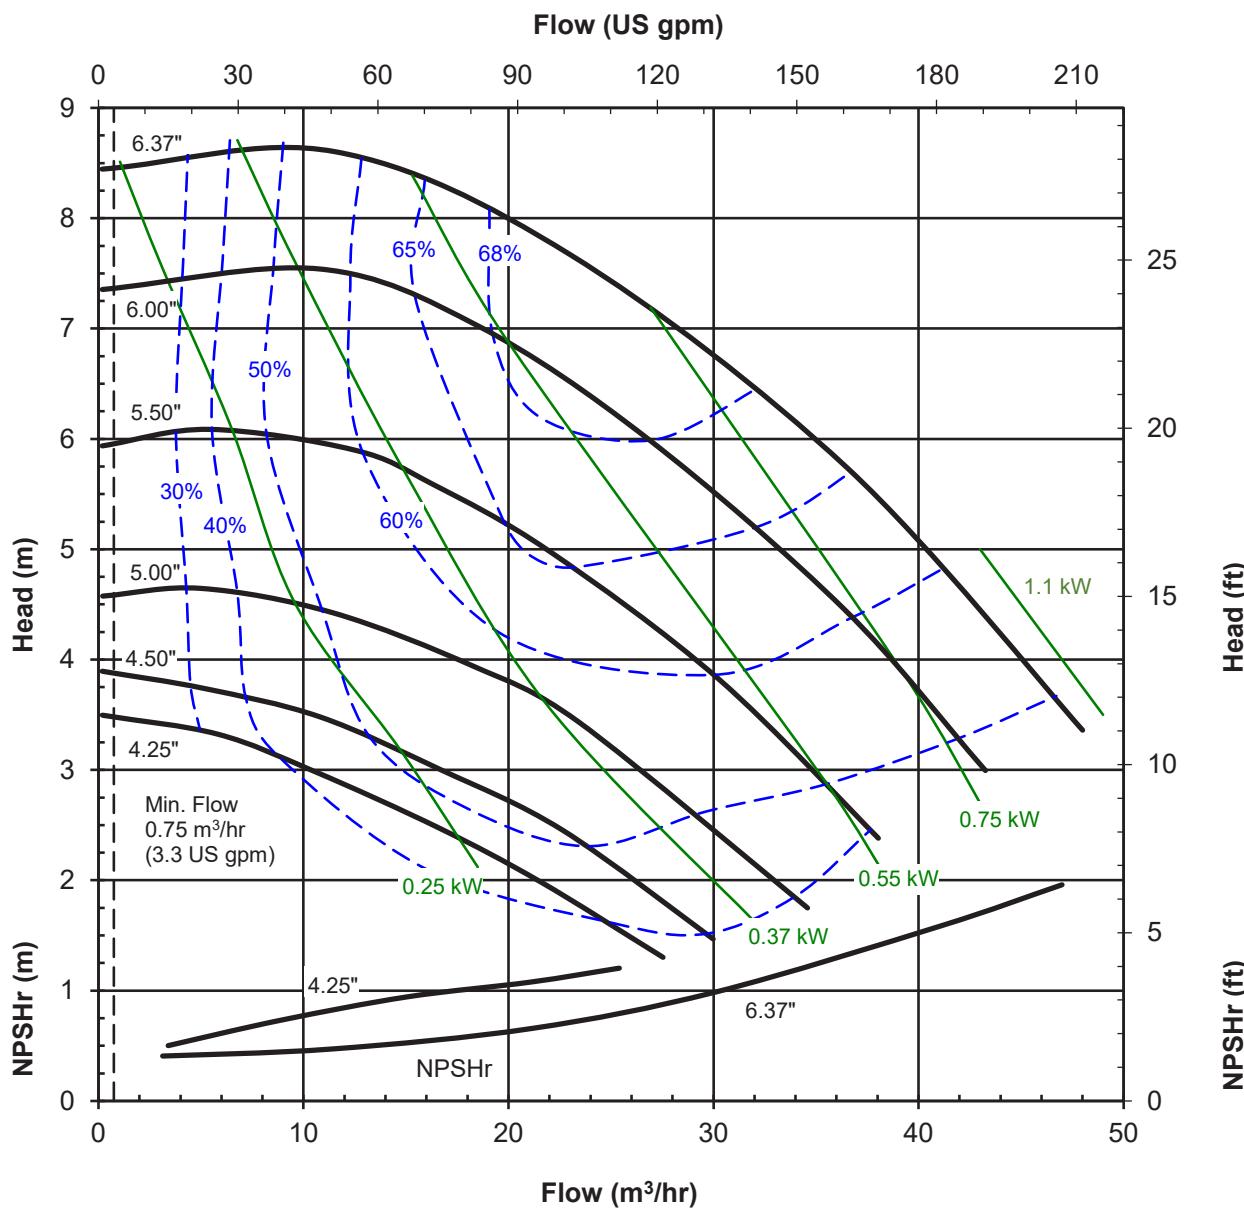

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC328
3500 rpm, 60 Hz
Suction: 3"
Discharge: 2"
S.G. 1.0

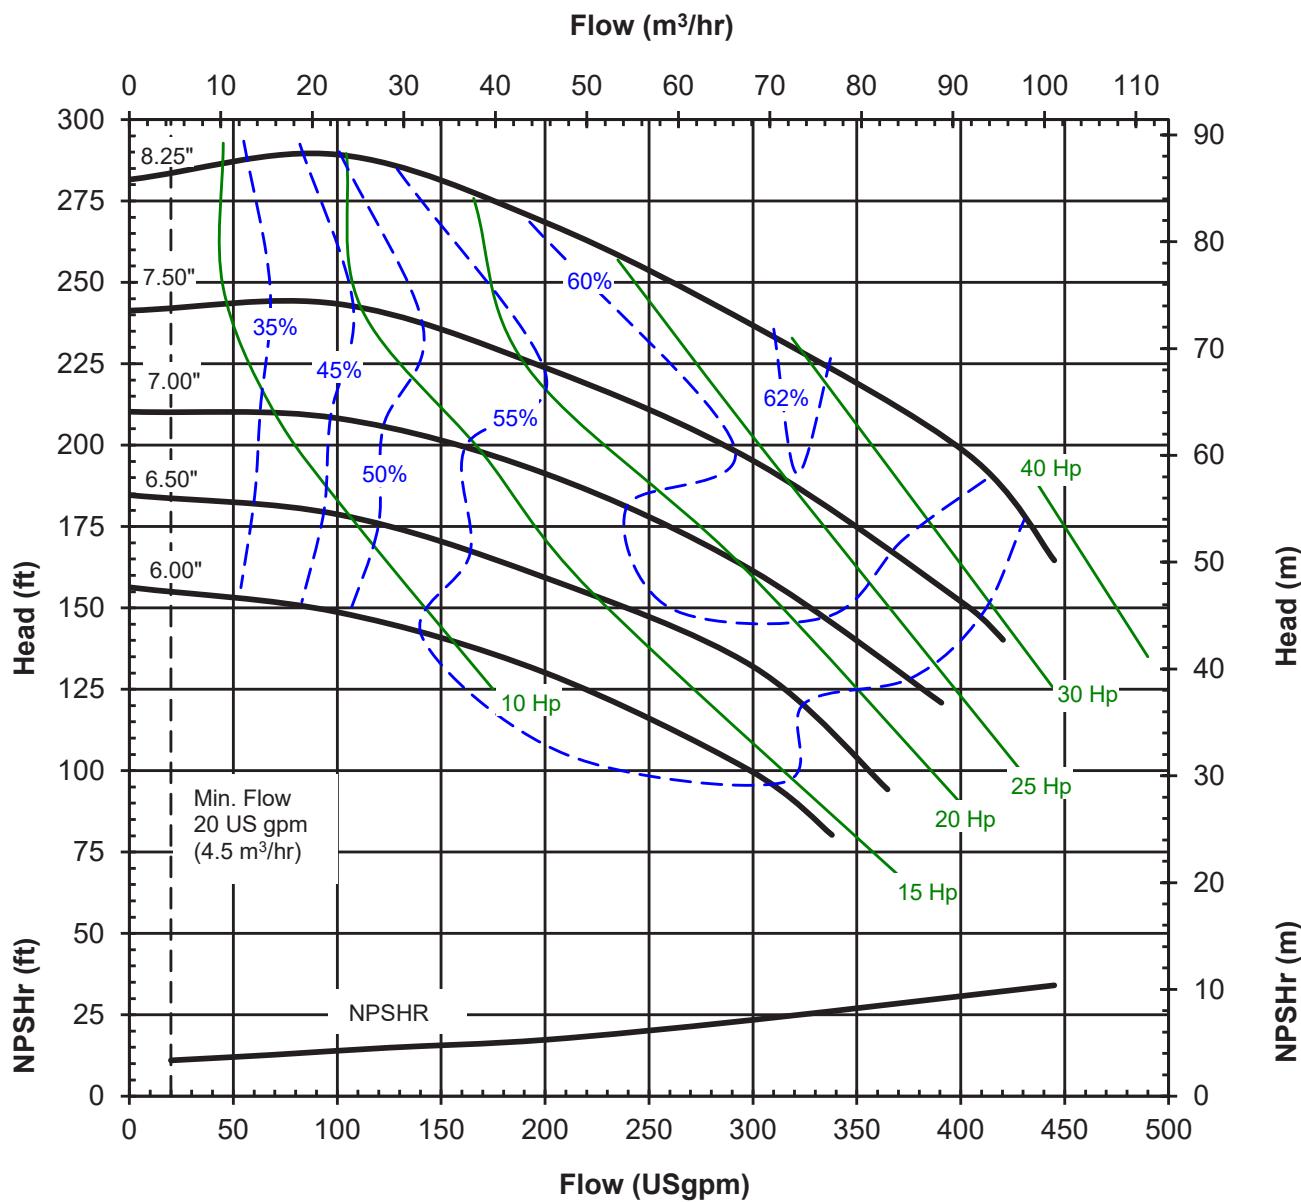

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC328
 1750 rpm, 60 Hz
 Suction: 3"
 Discharge: 2"
 S.G. 1.0

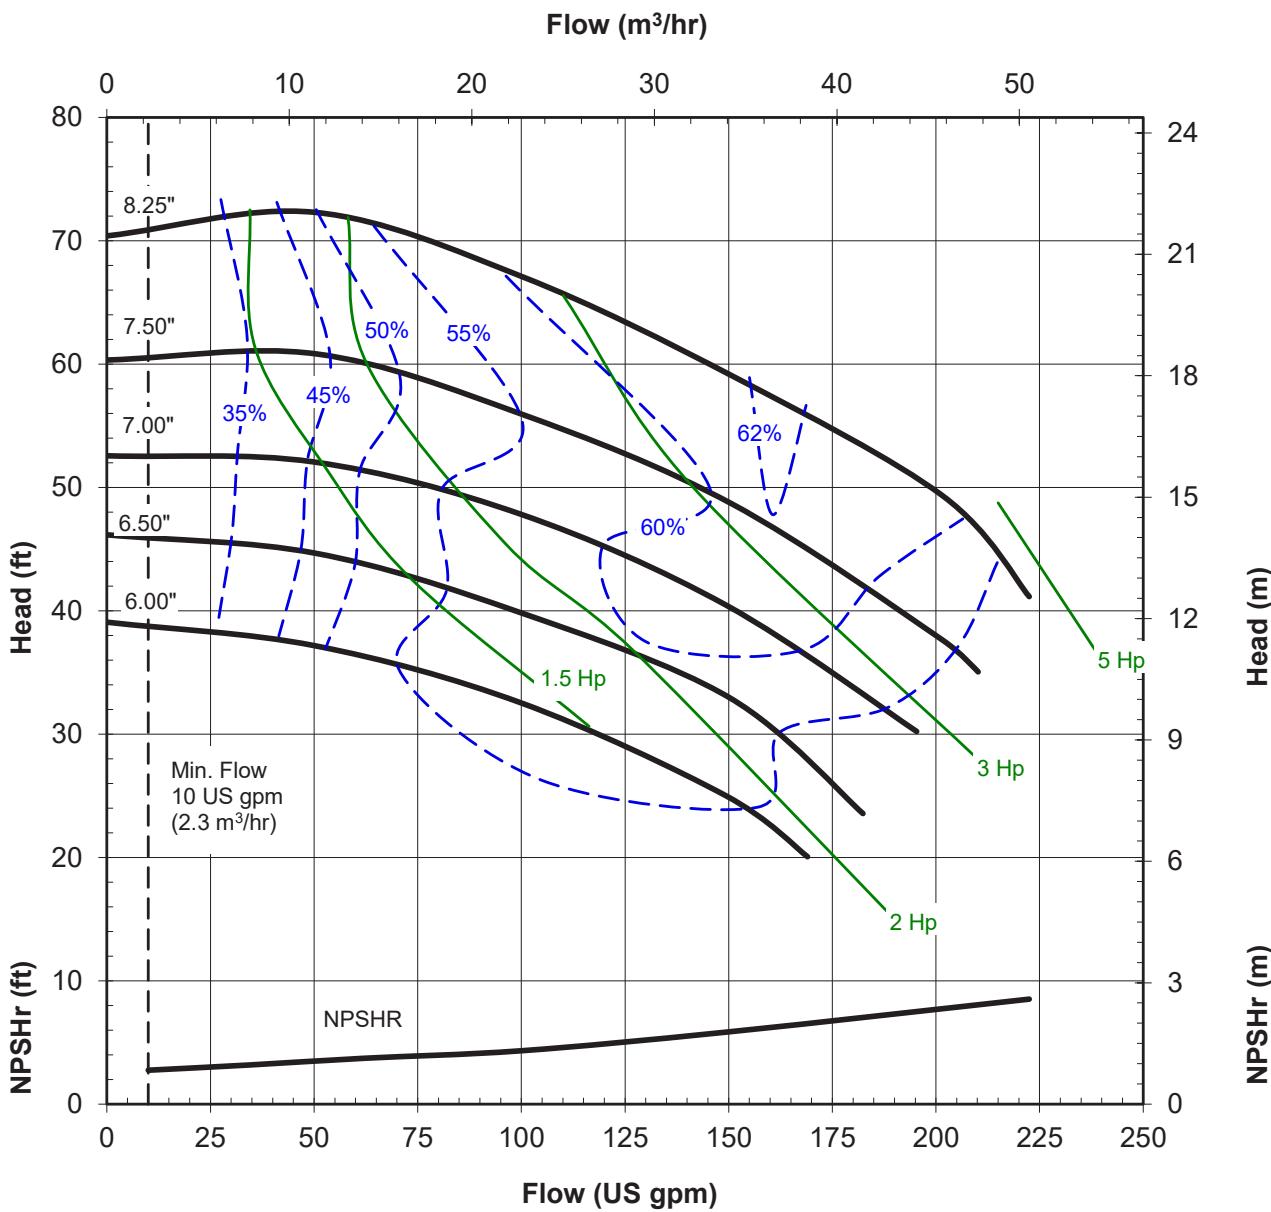

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE

MODEL: UC328
2900 rpm, 50 Hz
Suction: 3"
Discharge: 2"
S.G. 1.0

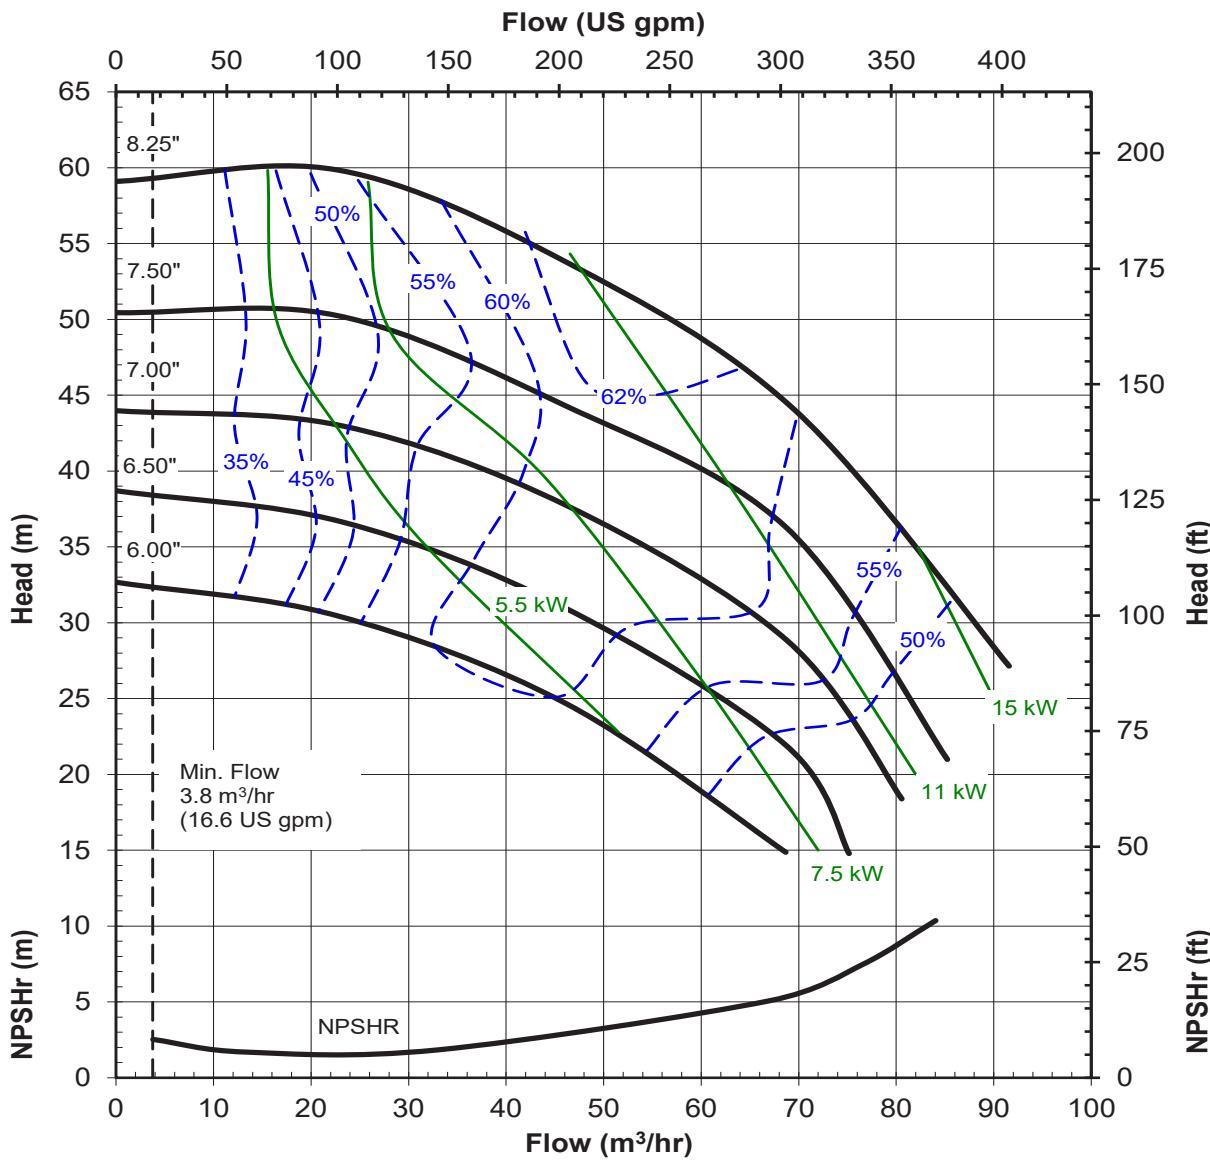

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC328

1450 rpm, 50 Hz

Suction: 3"

Discharge: 2"


S.G. 1.0

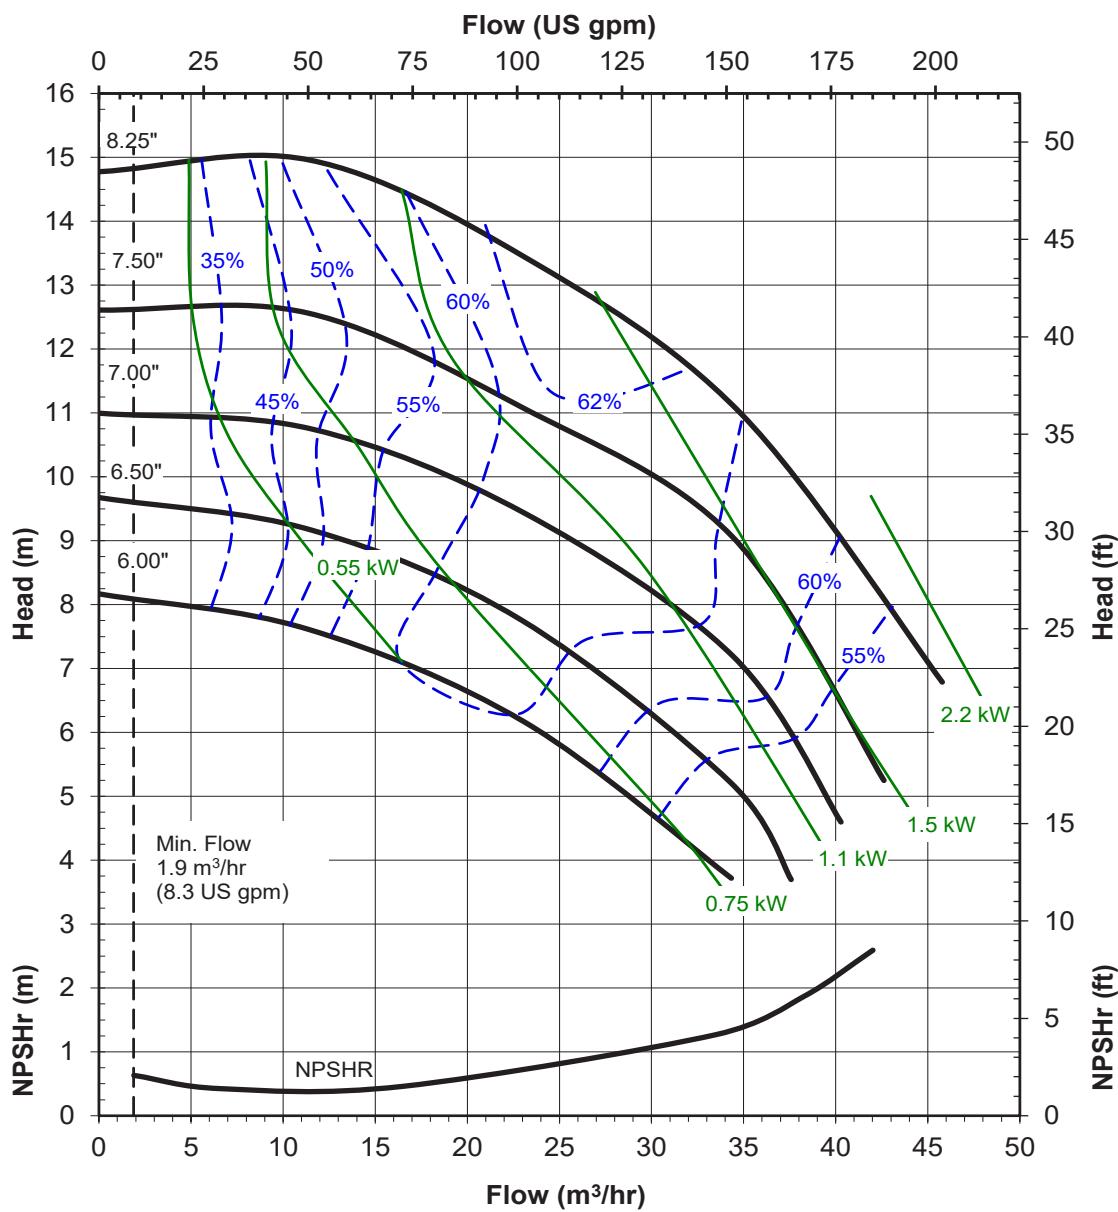


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**

MODEL: UC3158
3500 rpm, 60 Hz
Suction: 3"
Discharge: 1.5"
S.G. 1.0

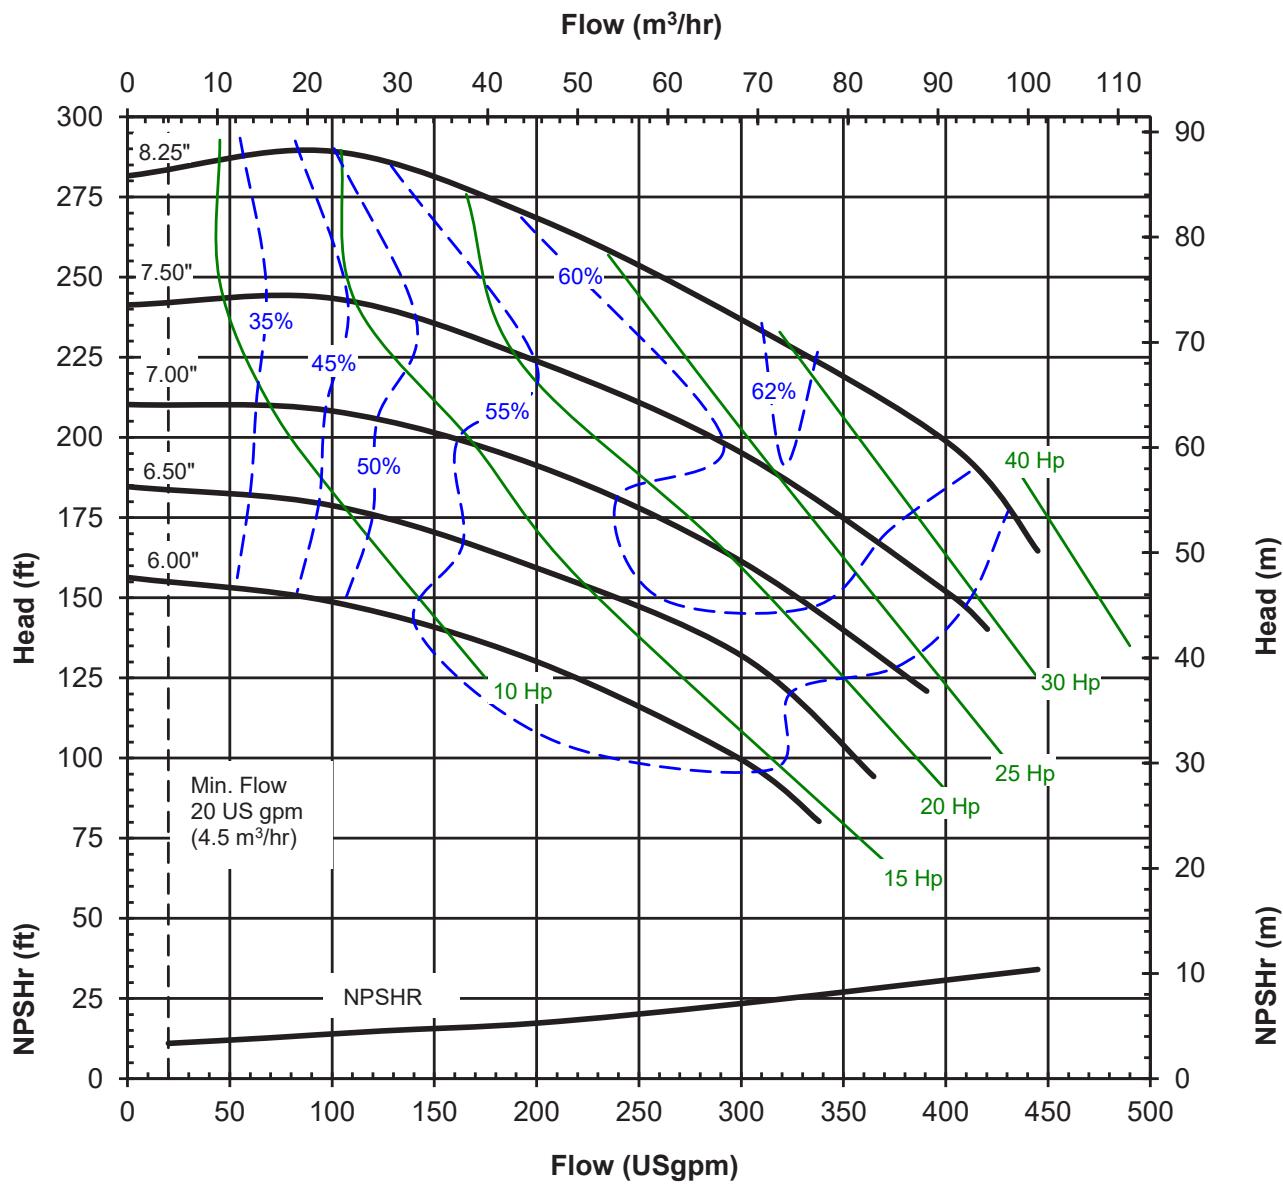


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

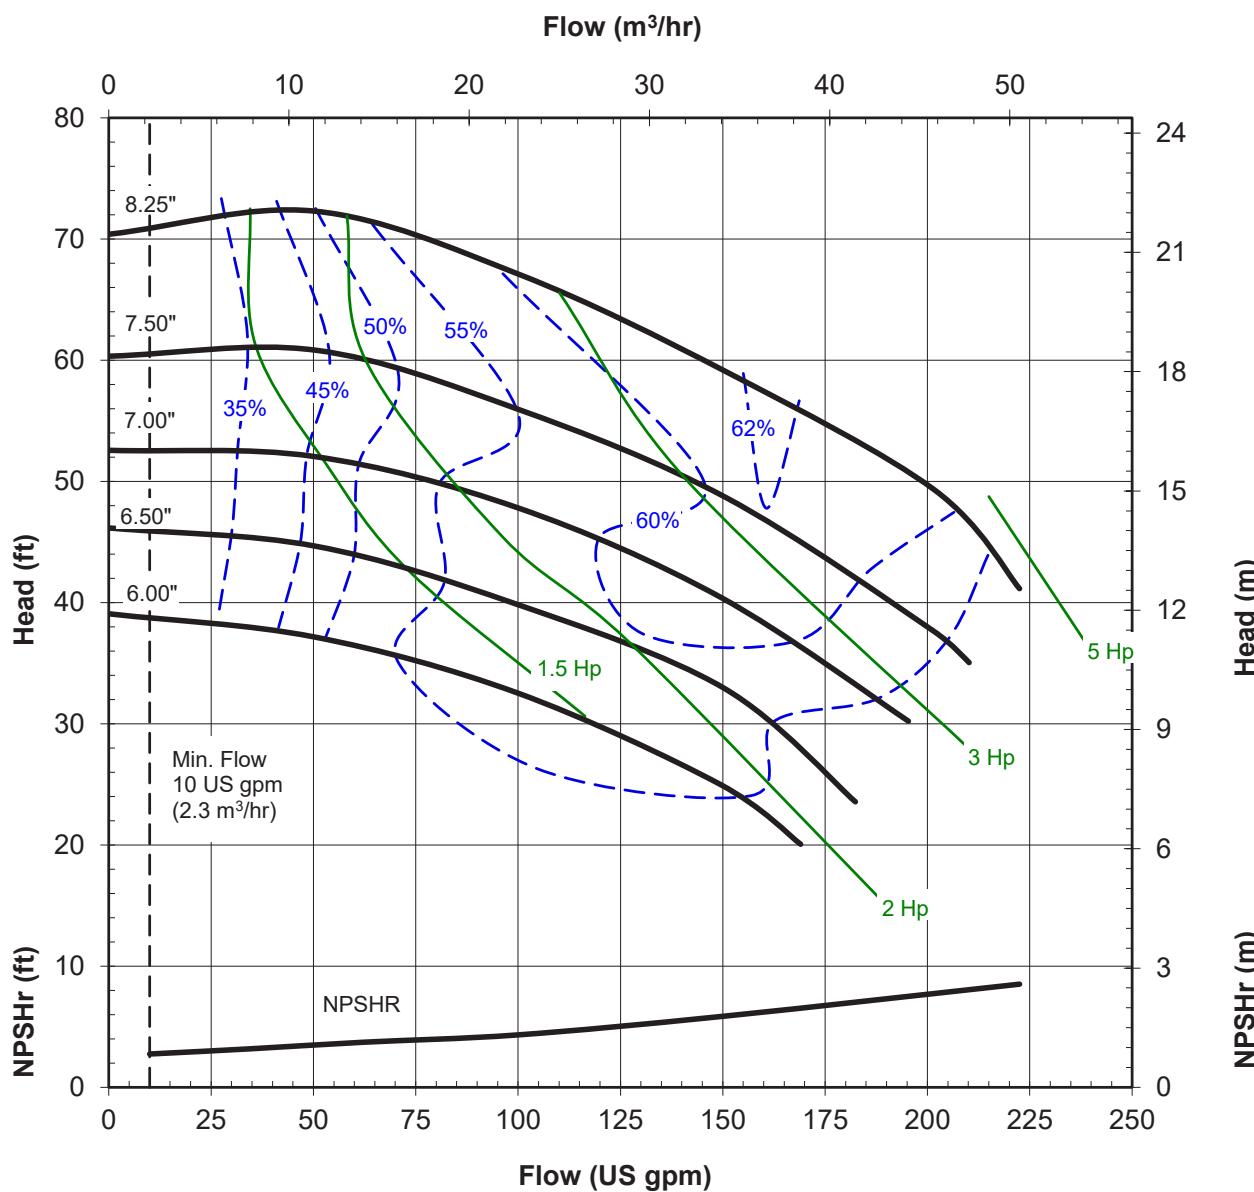**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**
MODEL: UC3158
1750 rpm, 60 Hz
Suction: 3"
Discharge: 1.5"
S.G. 1.0


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE

MODEL: UC3158
2900 rpm, 50 Hz
Suction: 3"
Discharge: 1.5"
S.G. 1.0

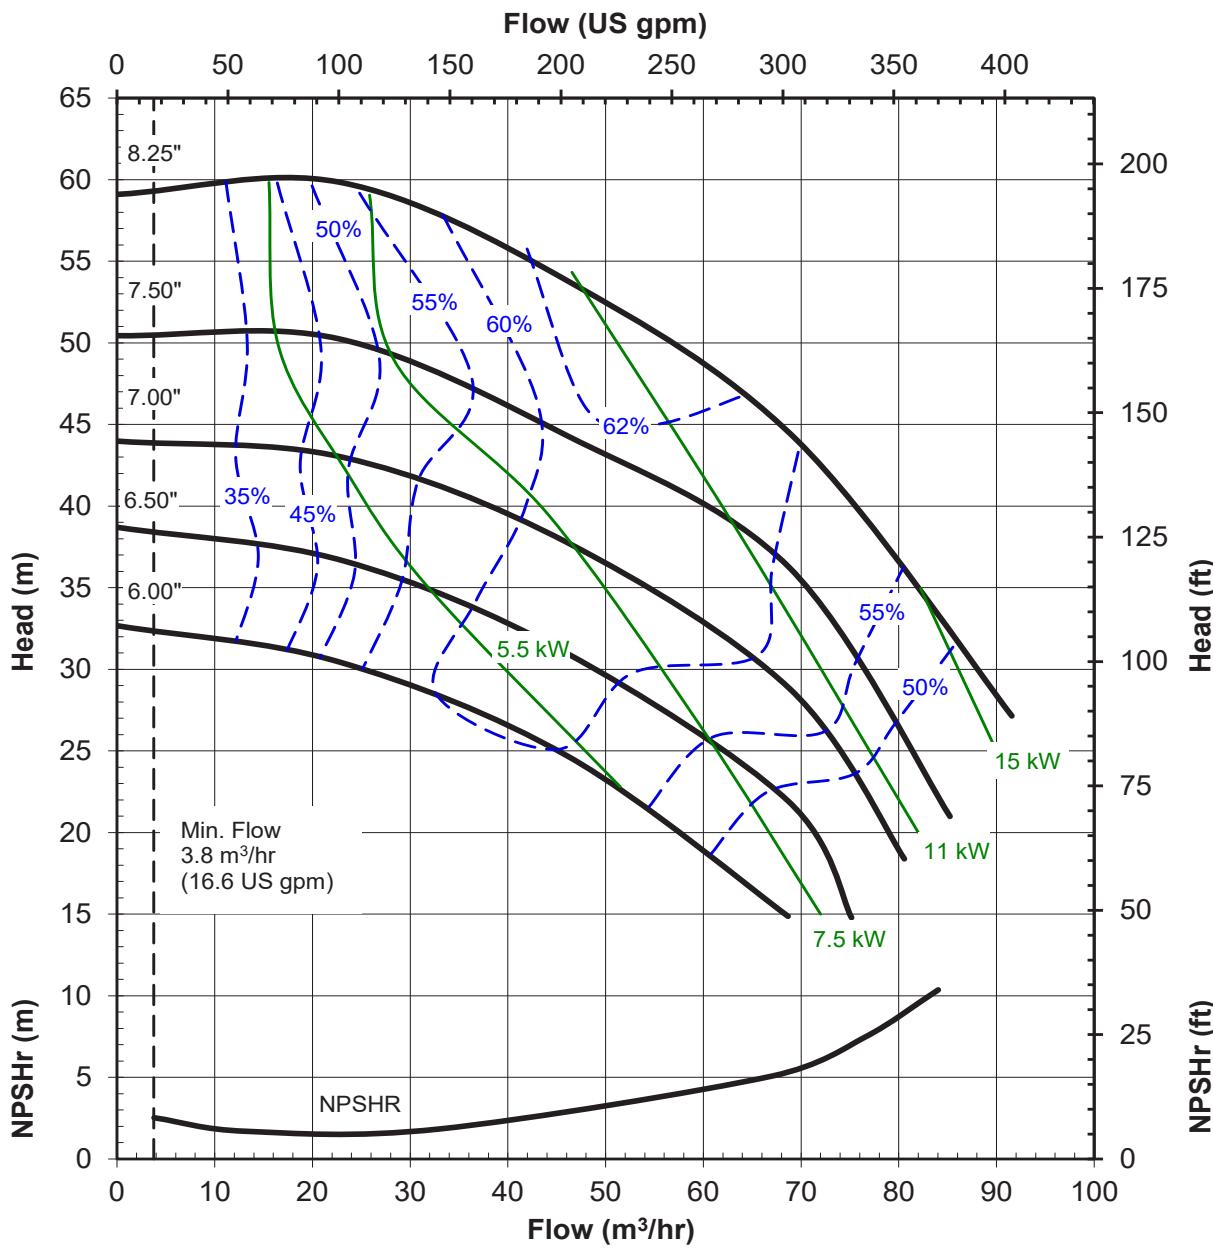

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC3158

1450 rpm, 50 Hz

Suction: 3"

Discharge: 1.5"


S.G. 1.0

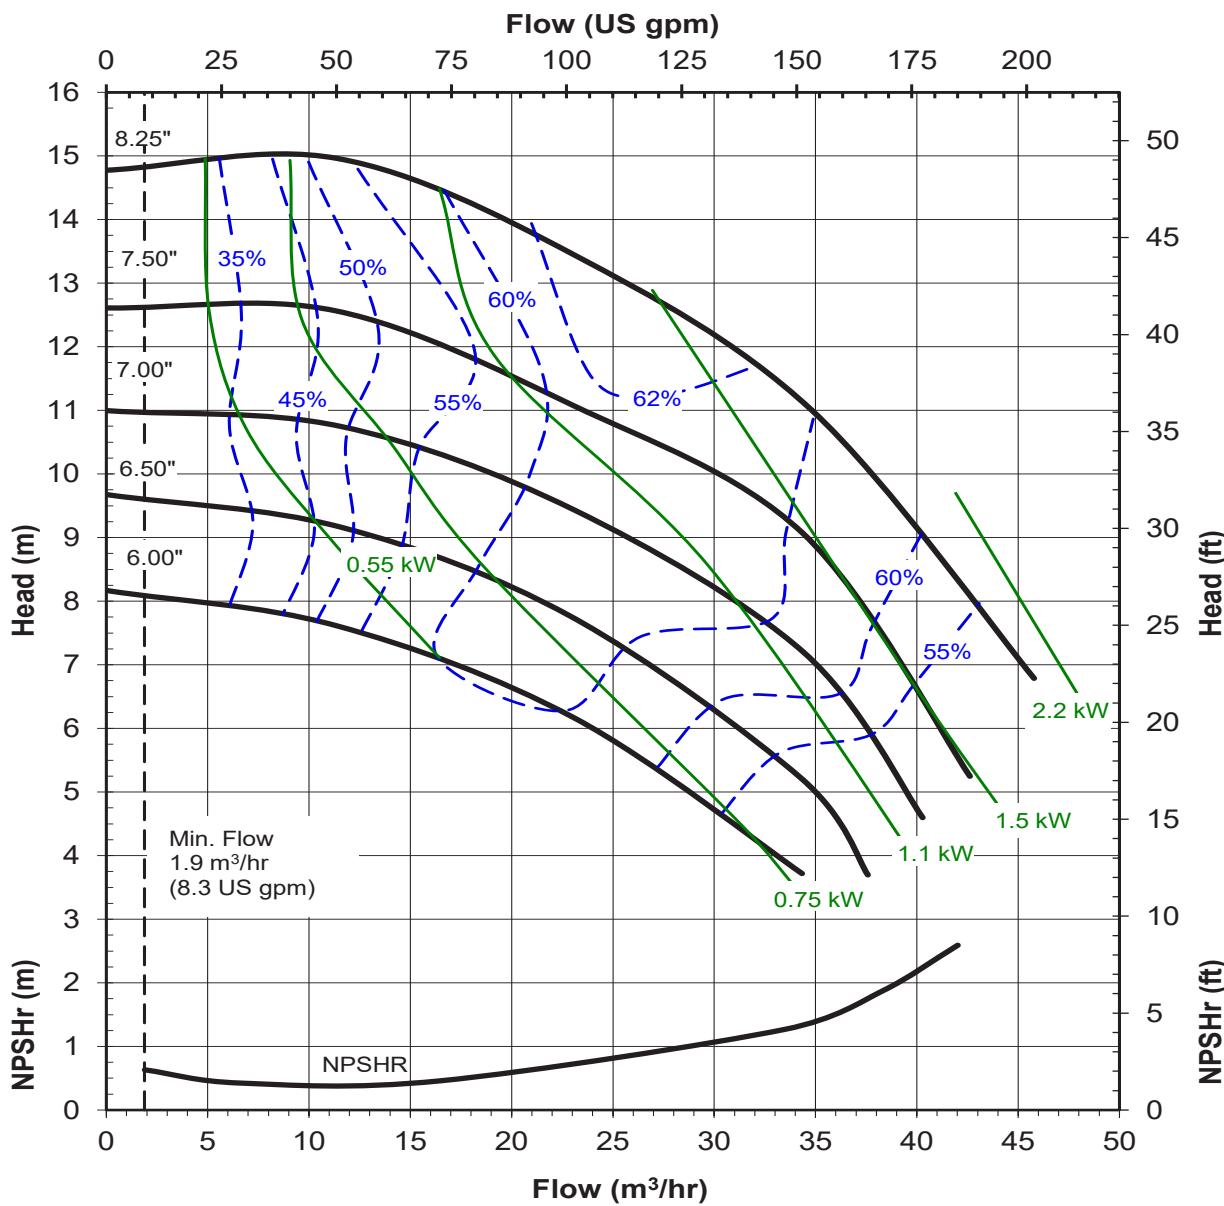

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC3210
3500 rpm, 60 Hz
Suction: 3"
Discharge: 2"
S.G. 1.0

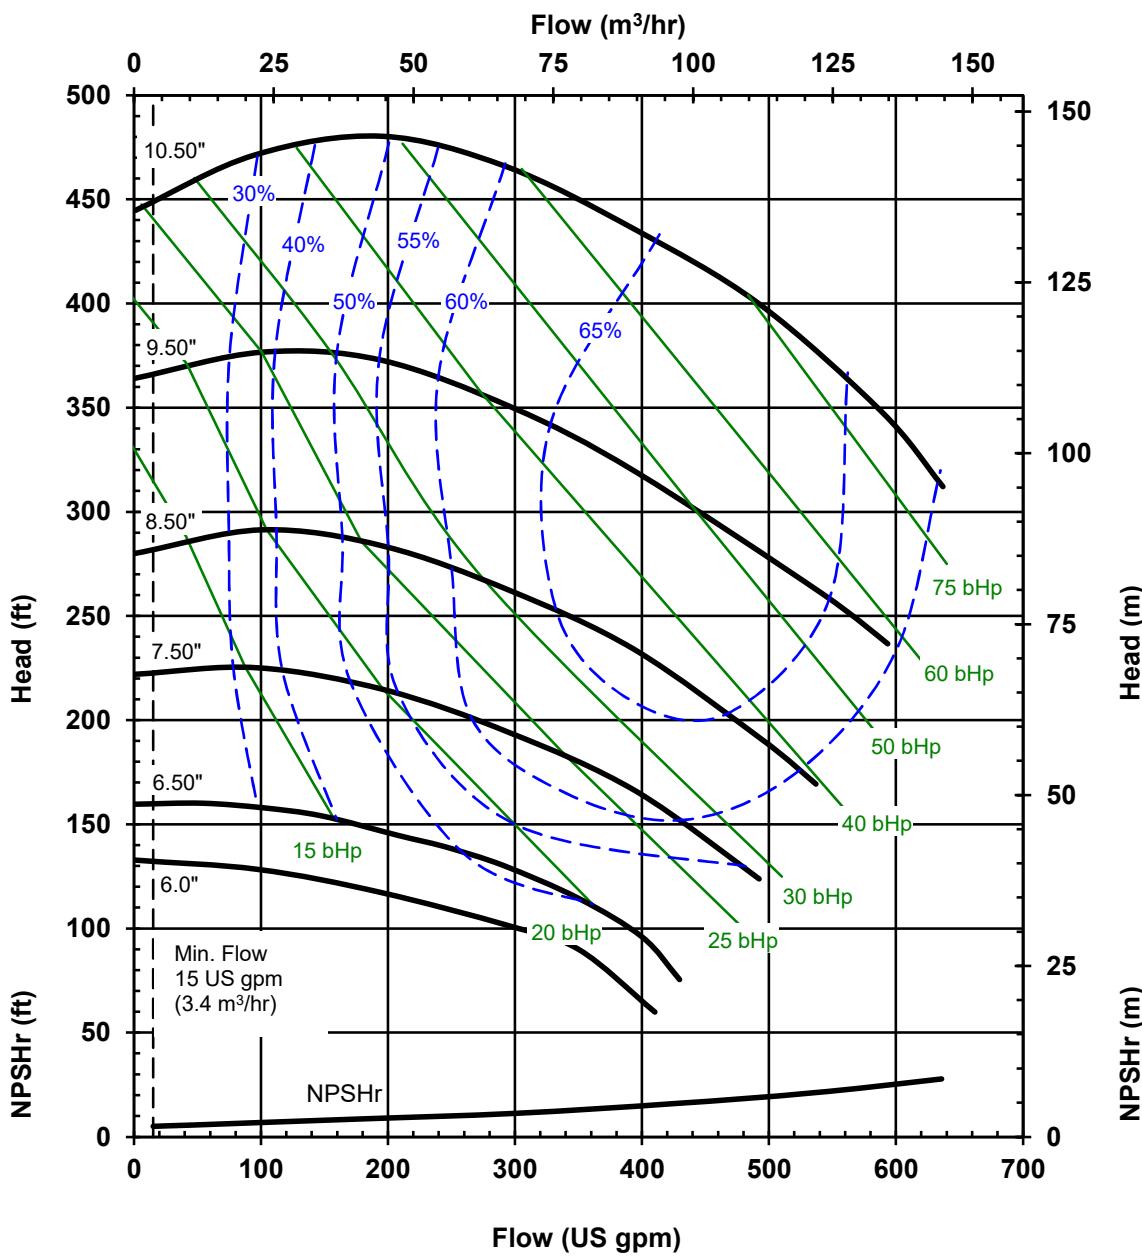

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE

MODEL: UC3210
 1750 rpm, 60 Hz
 Suction: 3"
 Discharge: 2"
 S.G. 1.0

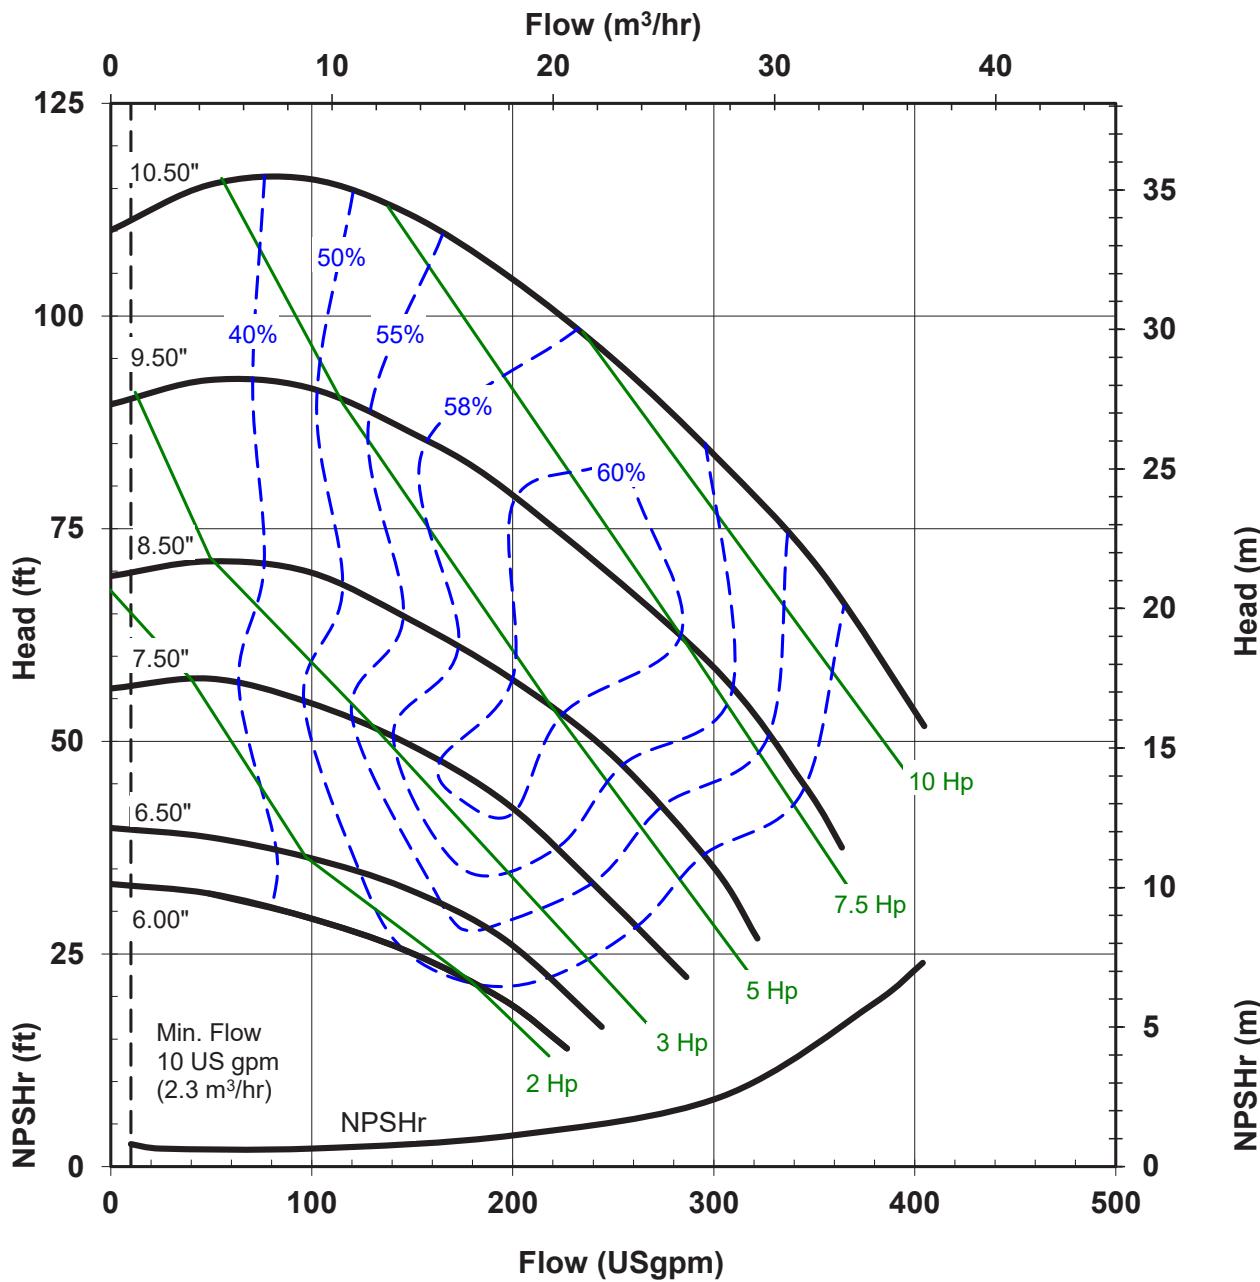

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC3210

2900 rpm, 50 Hz

Suction: 3"

Discharge: 2"


S.G. 1.0

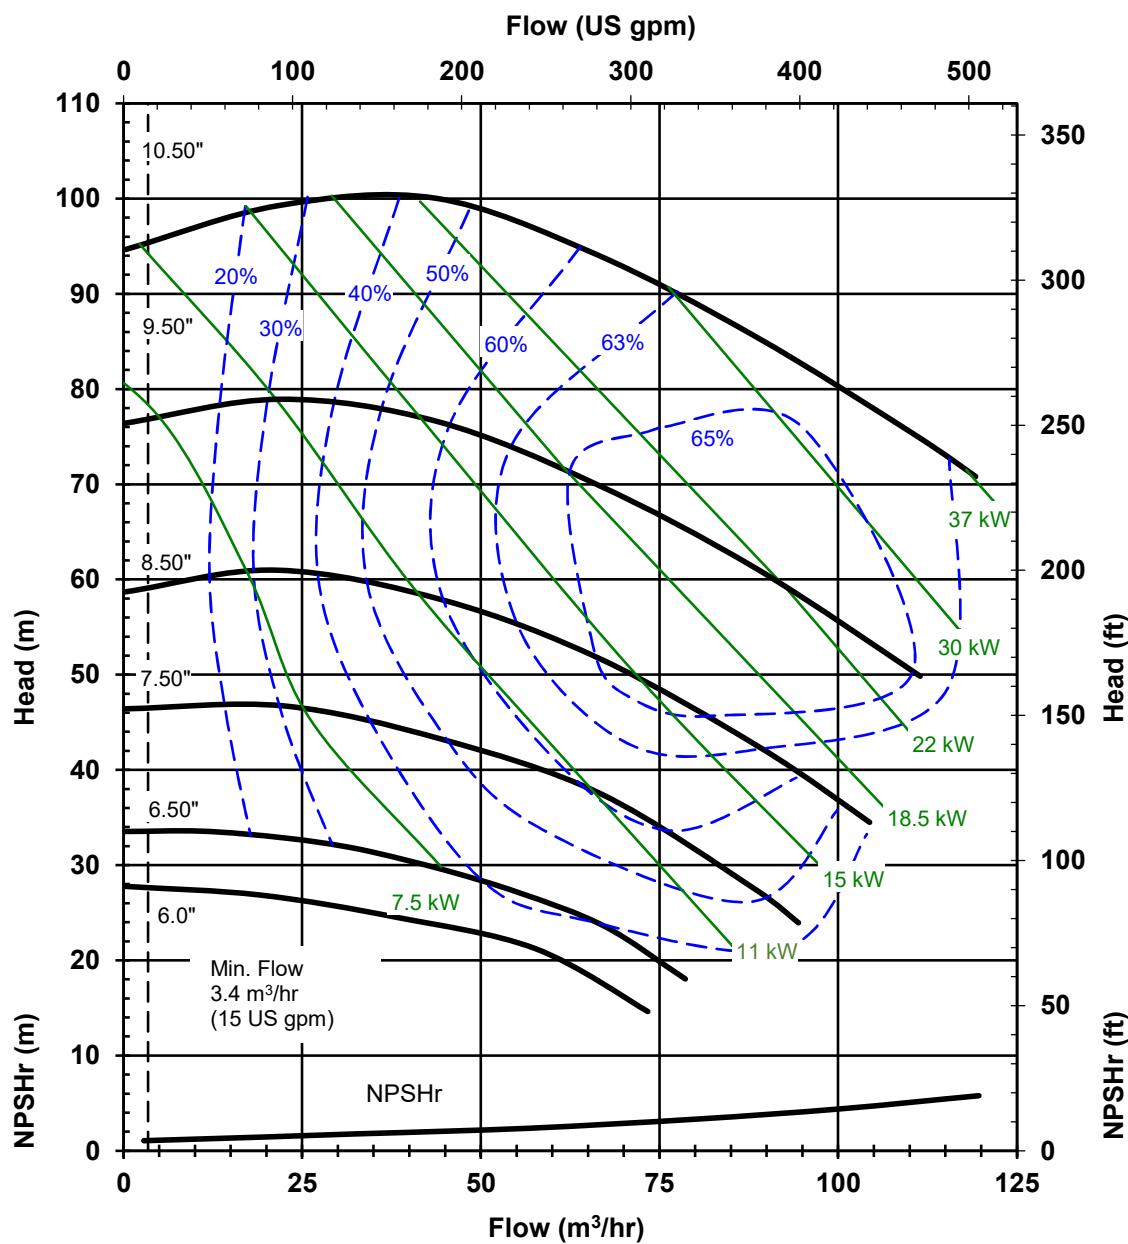

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC3210
 1450 rpm, 50 Hz
 Suction: 3"
 Discharge: 2"
 S.G. 1.0

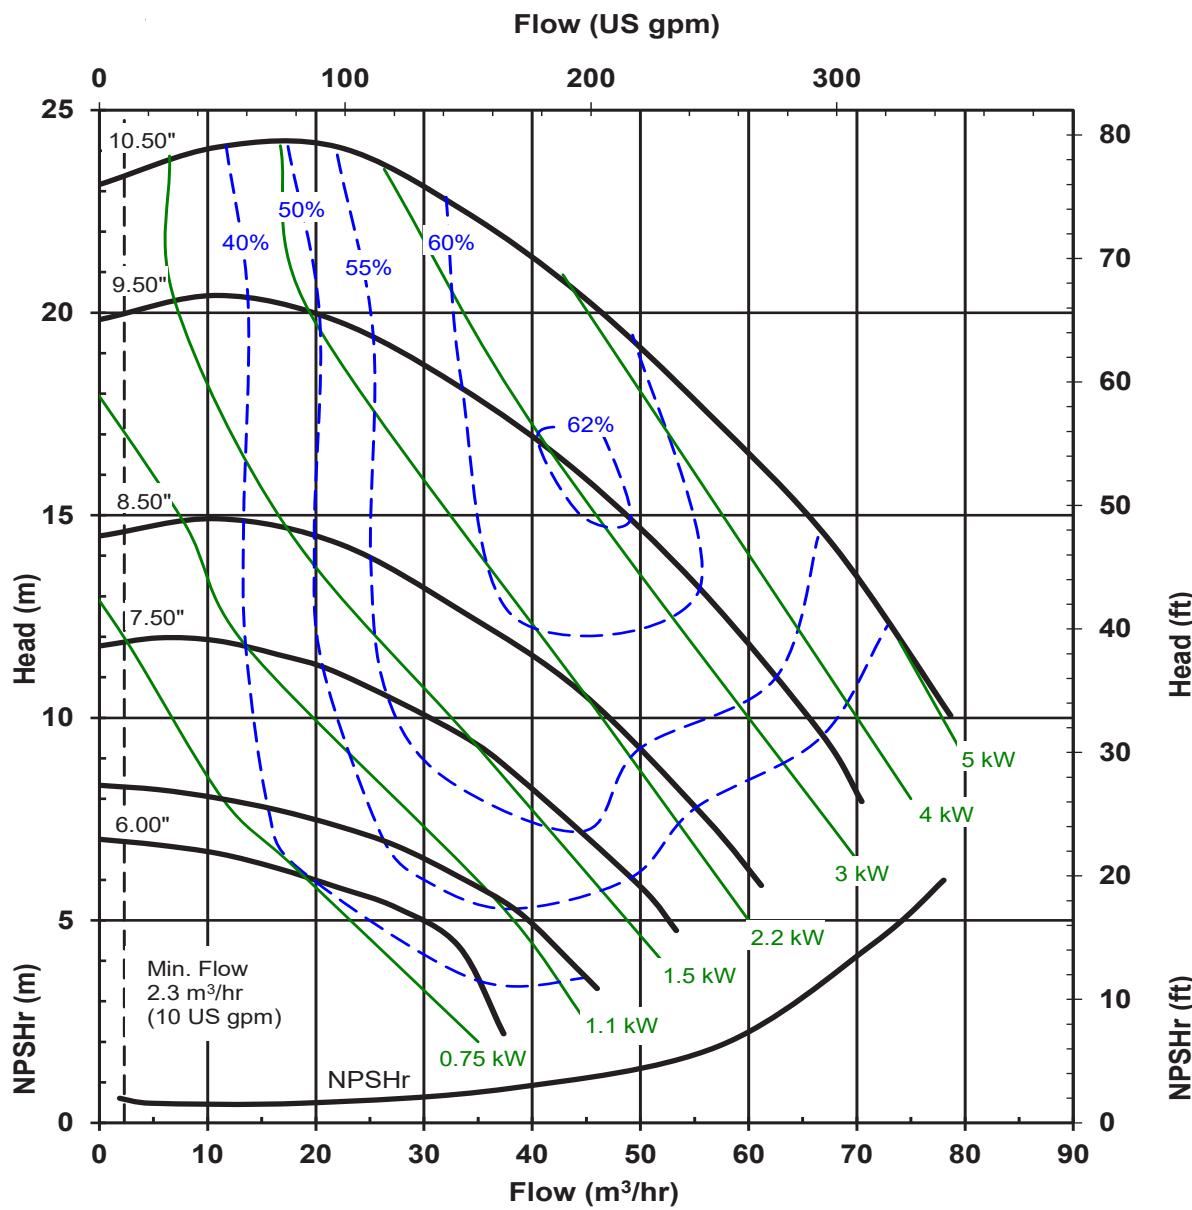

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC436
3500 rpm, 60 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

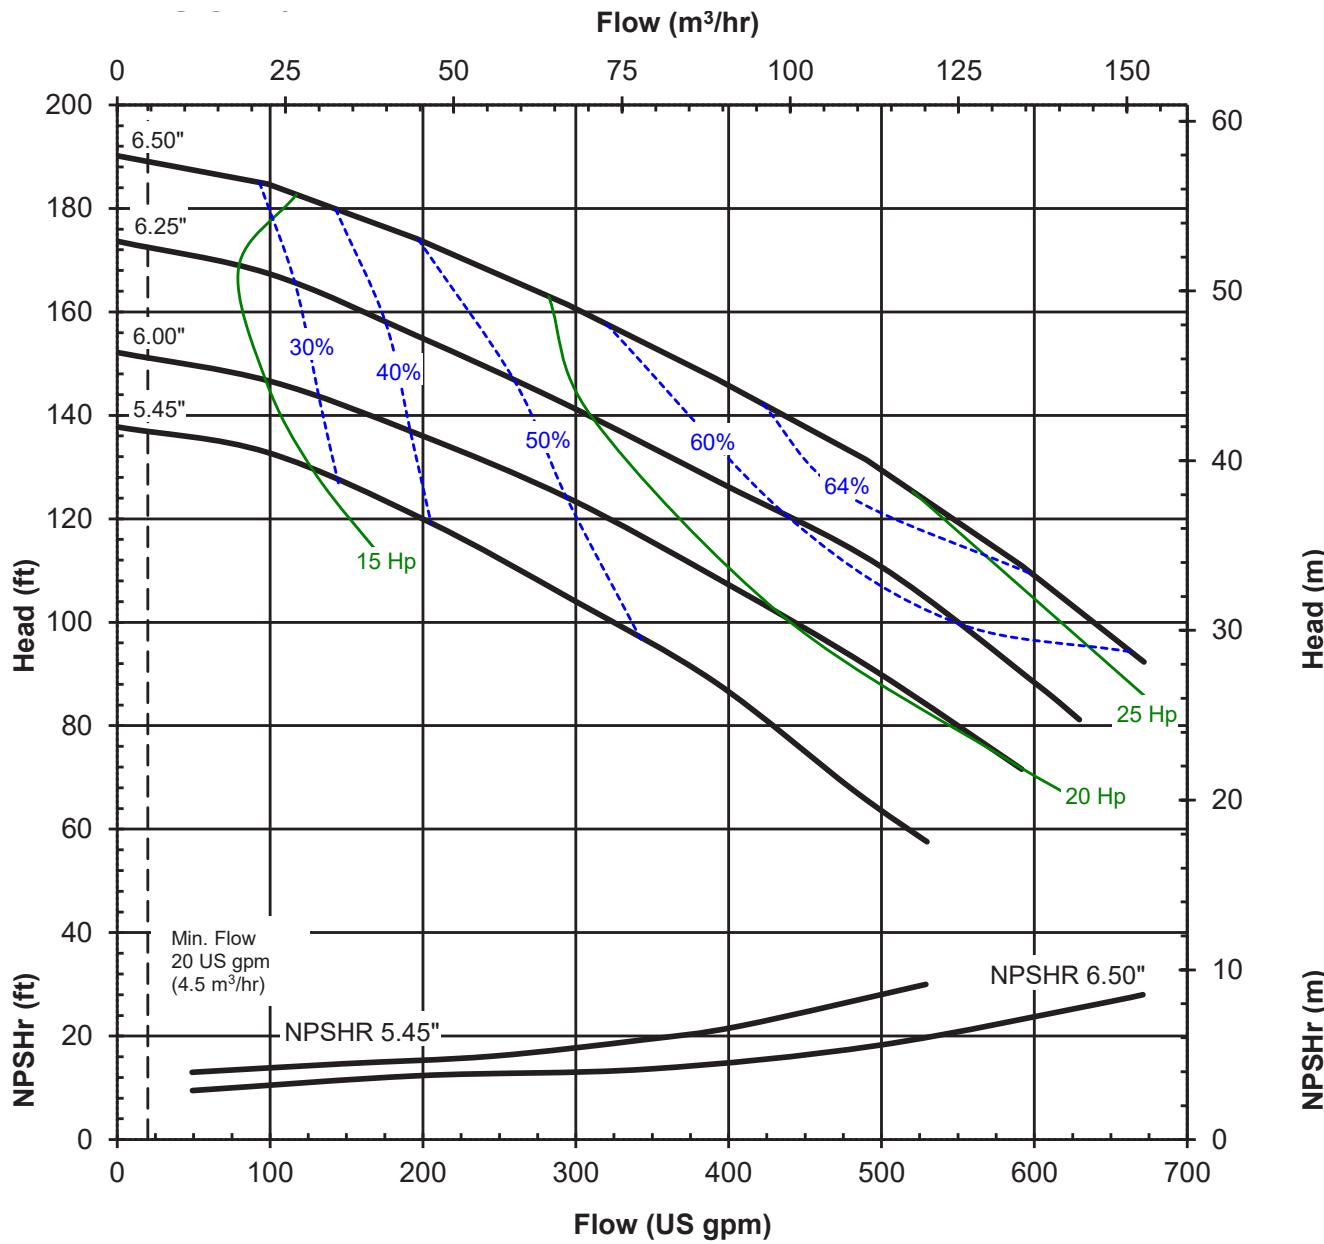

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC436
 1750 rpm, 60 Hz
 Suction: 4"
 Discharge: 3"
 S.G. 1.0

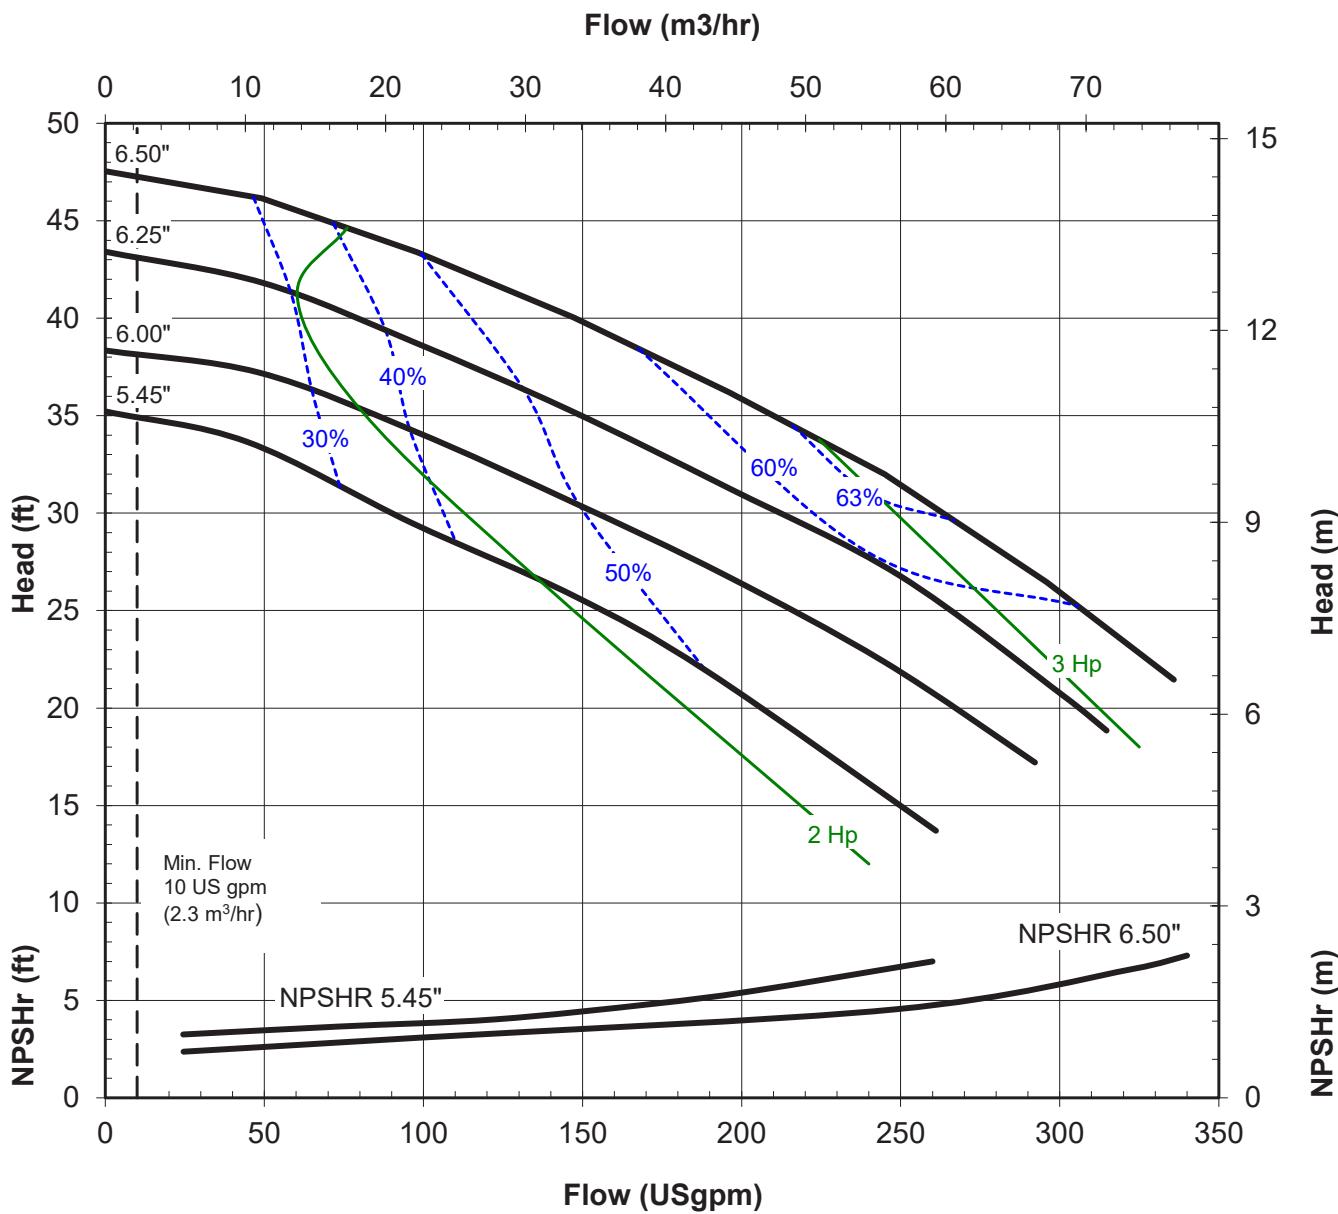

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC436
2900 rpm, 50 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

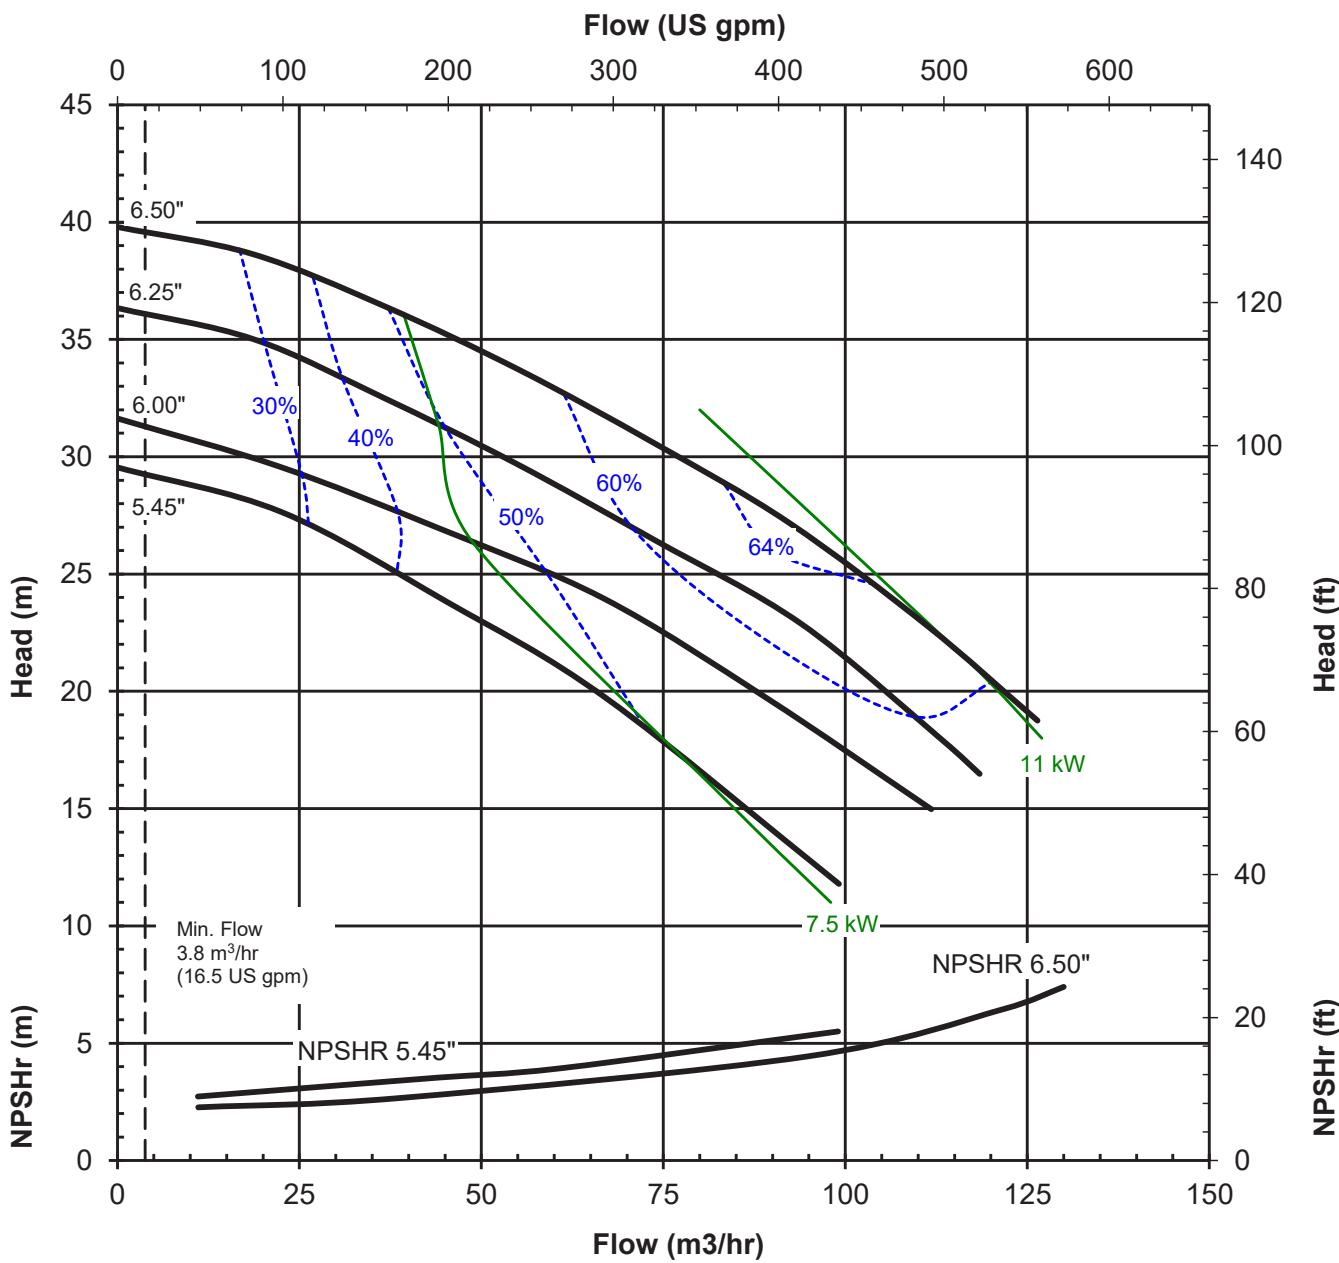

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC436
1450 rpm, 50 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

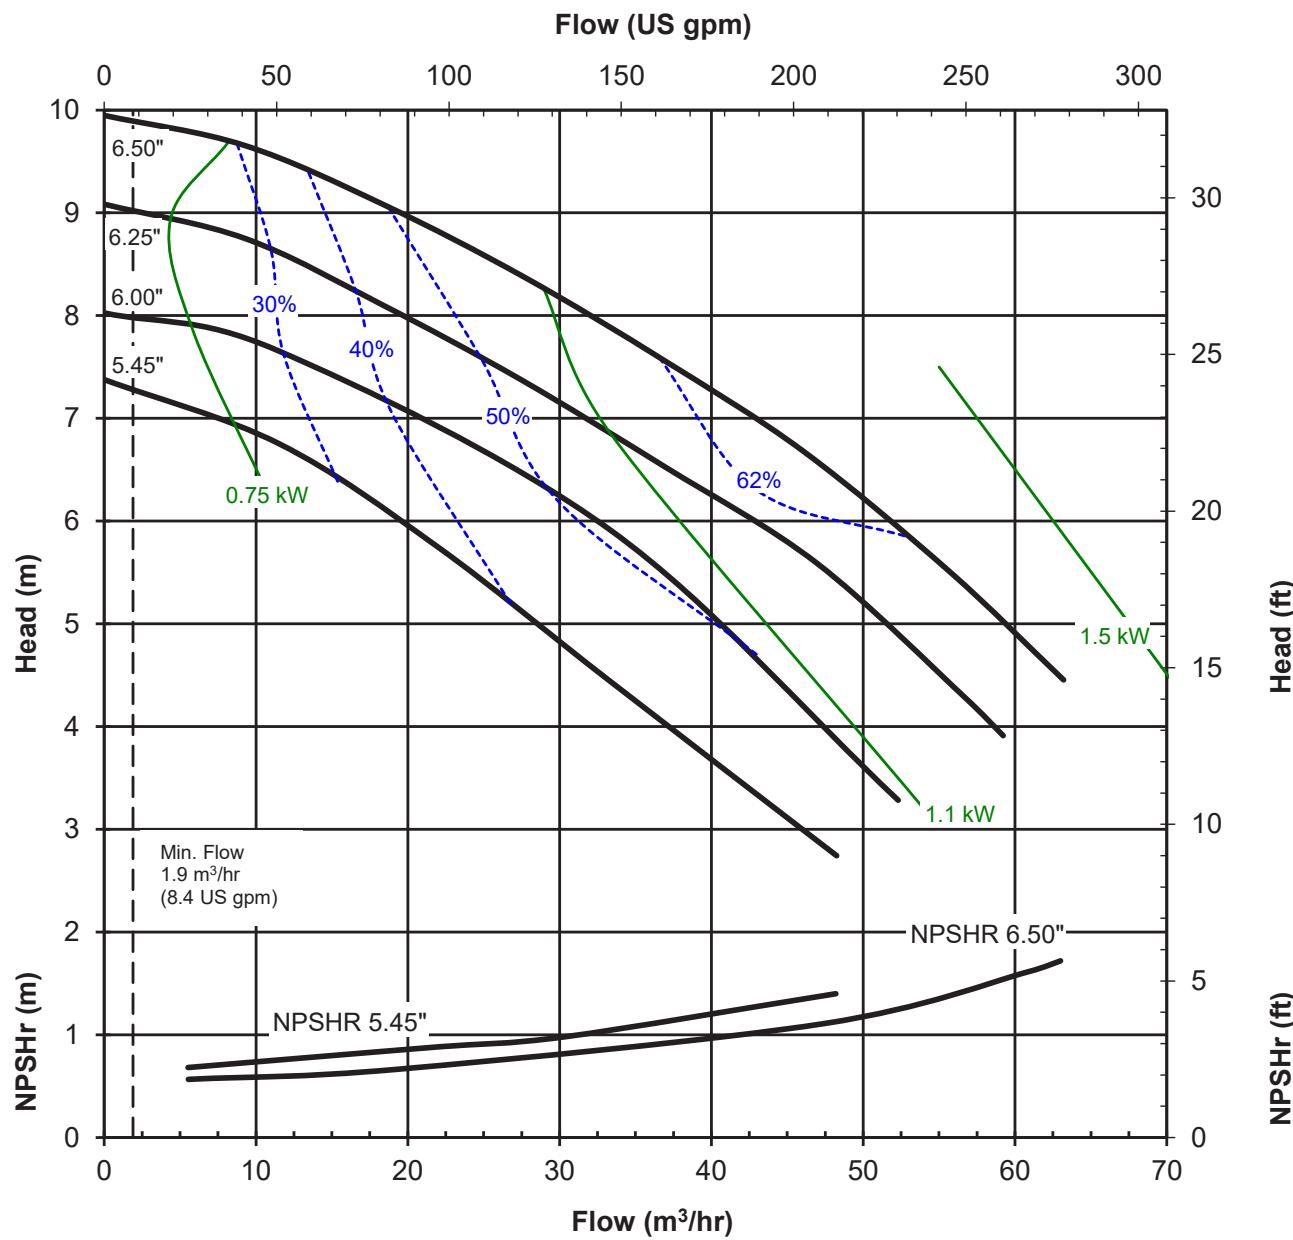

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC436L
3500 rpm, 60 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

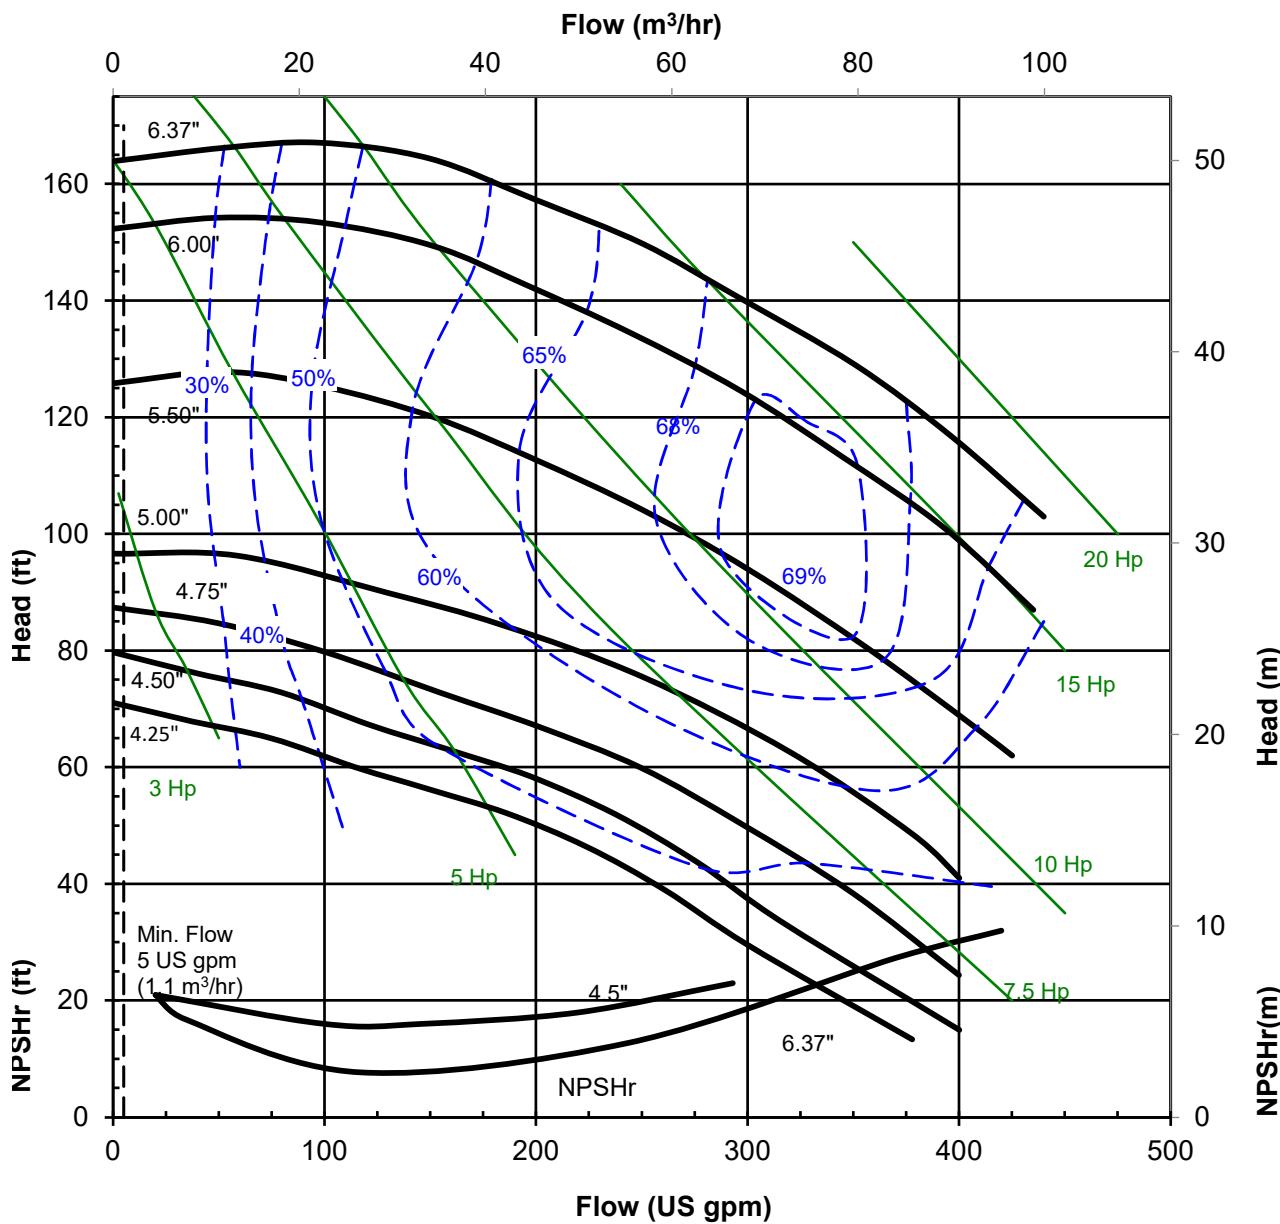

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC436L
 1750 rpm, 60 Hz
 Suction: 4"
 Discharge: 3"
 S.G. 1.0

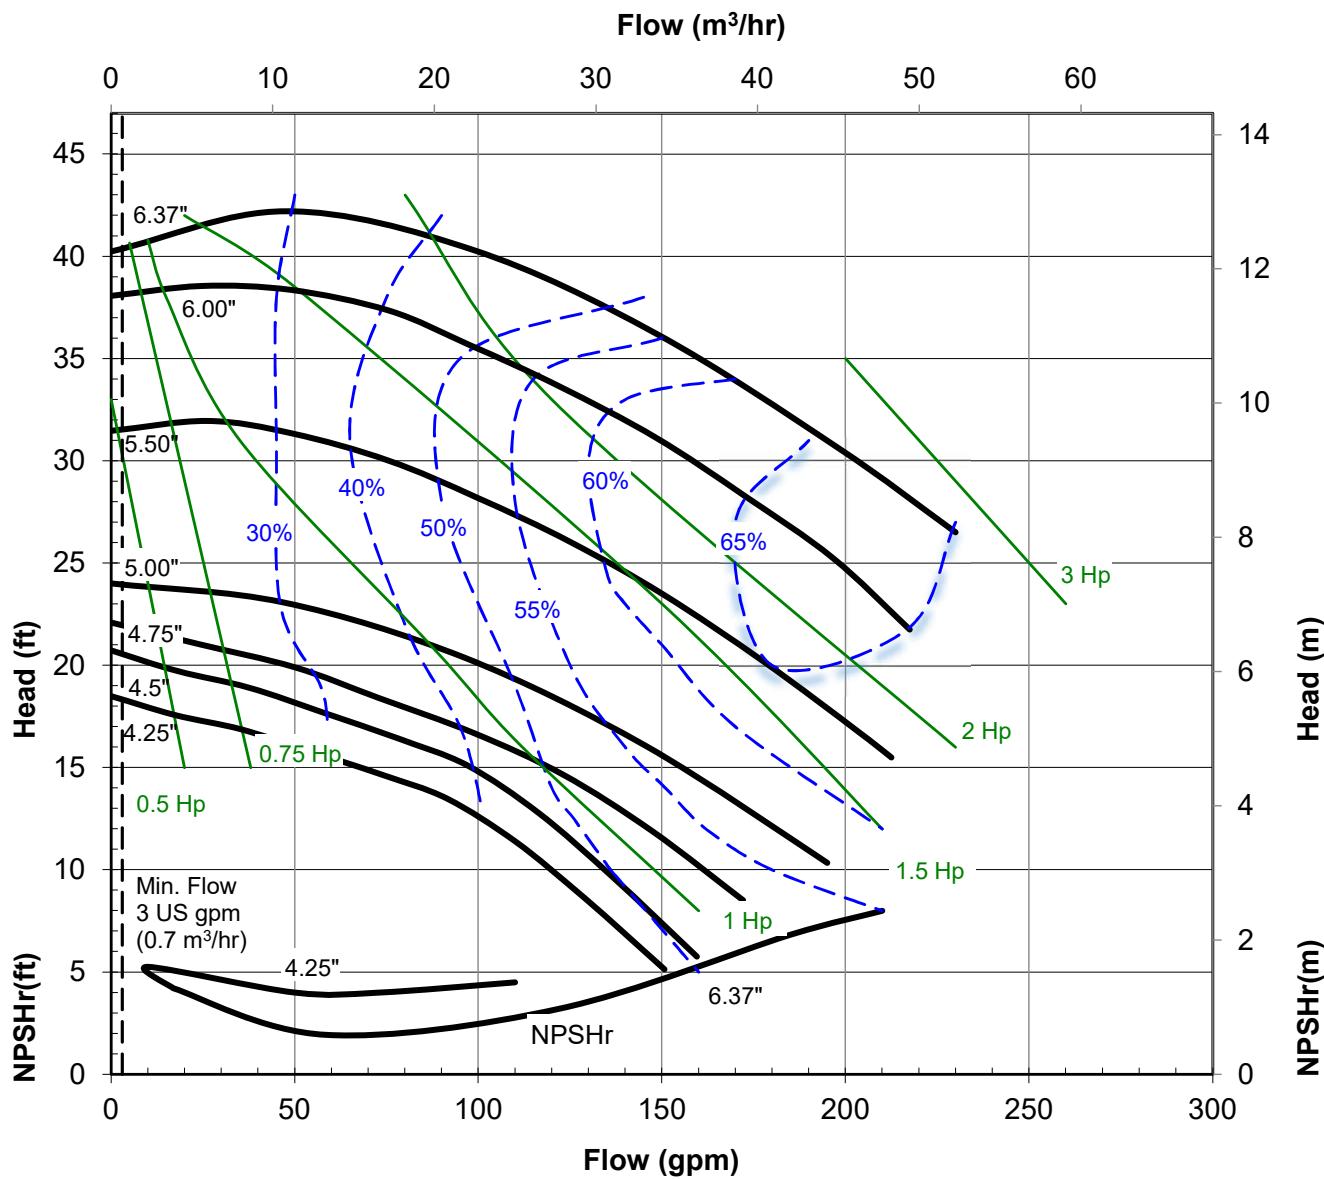

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC436L
2900 rpm, 60 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

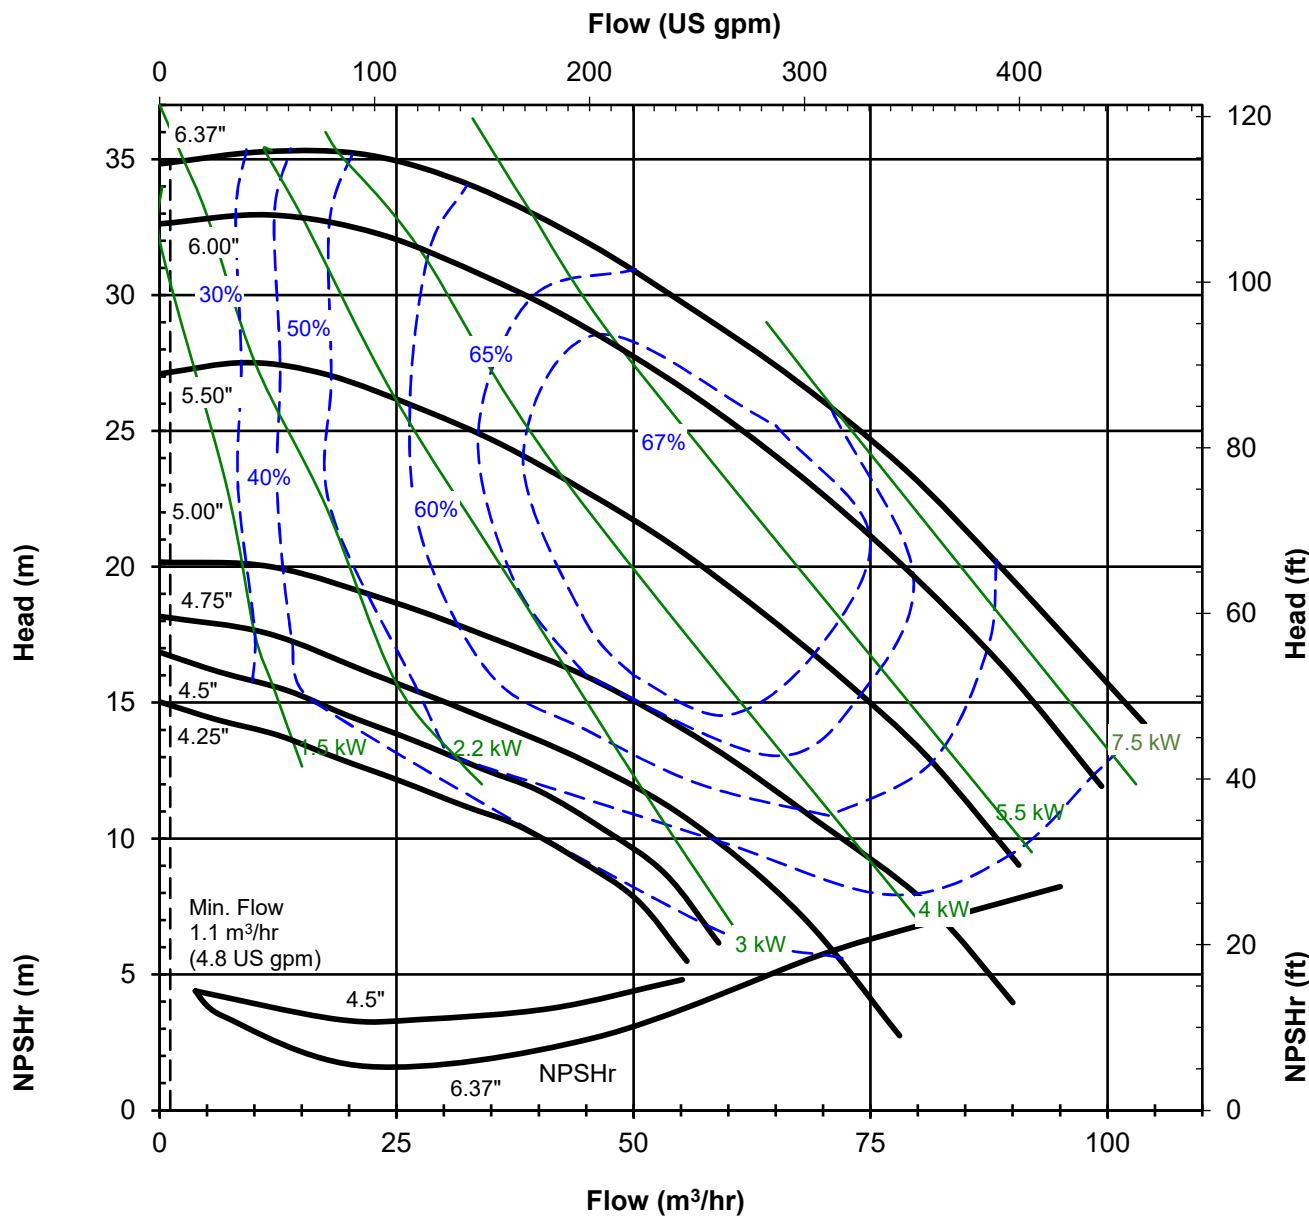

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC436L
1450 rpm, 50 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

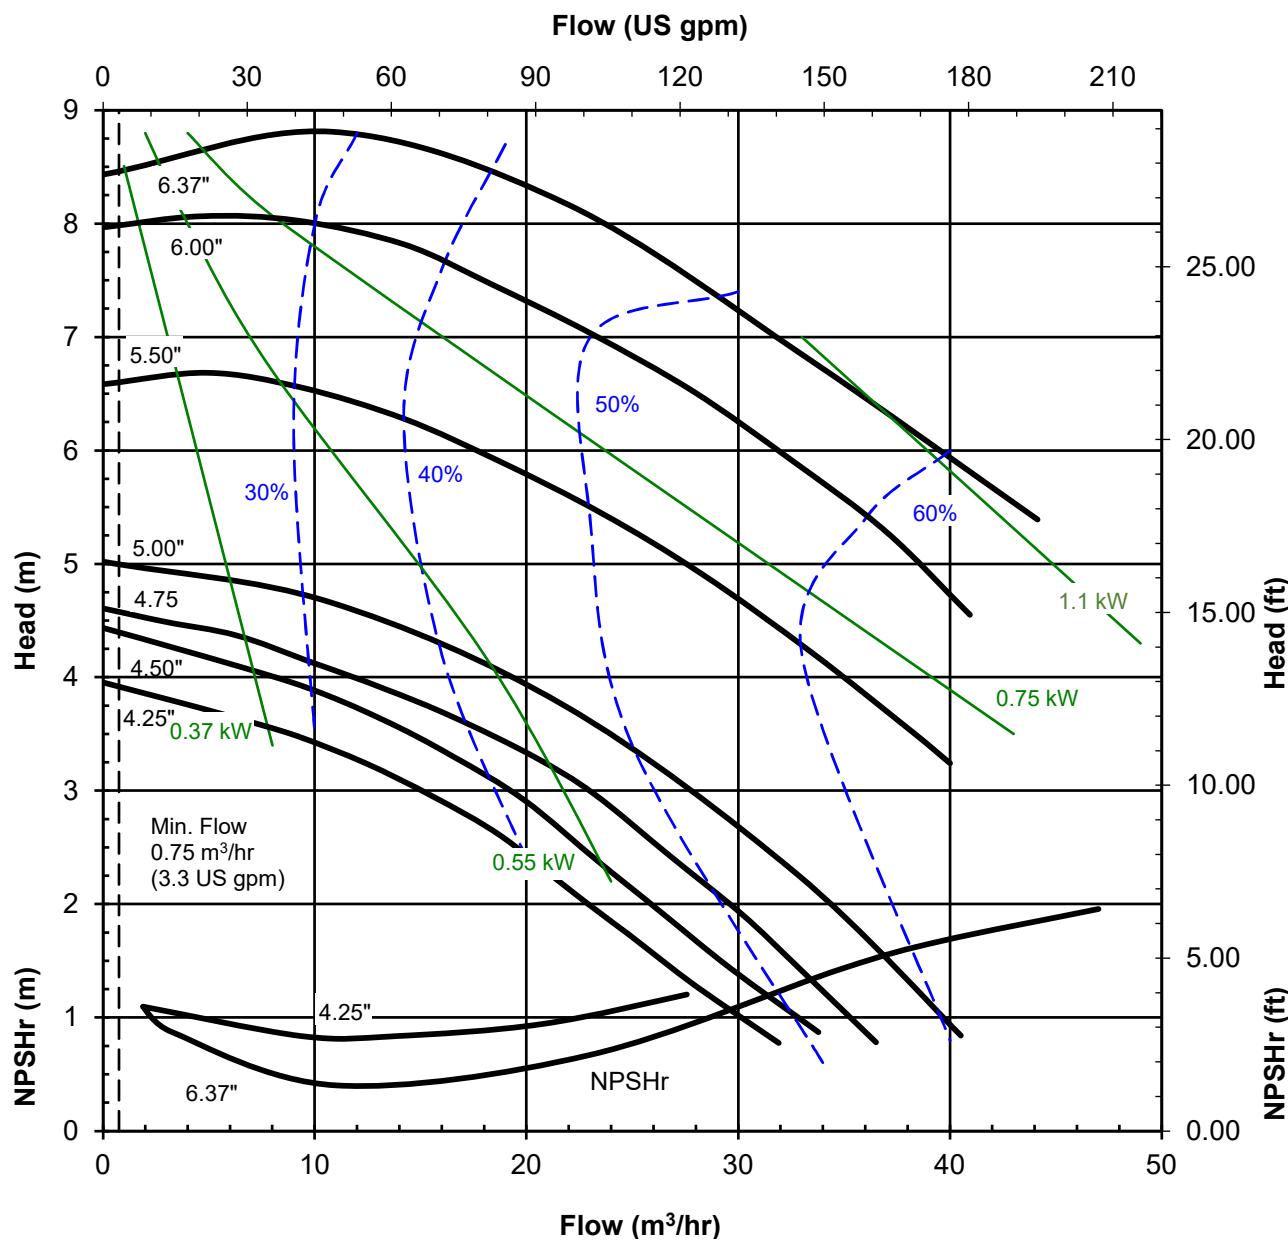


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE

MODEL: UC438
3500 rpm, 60 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

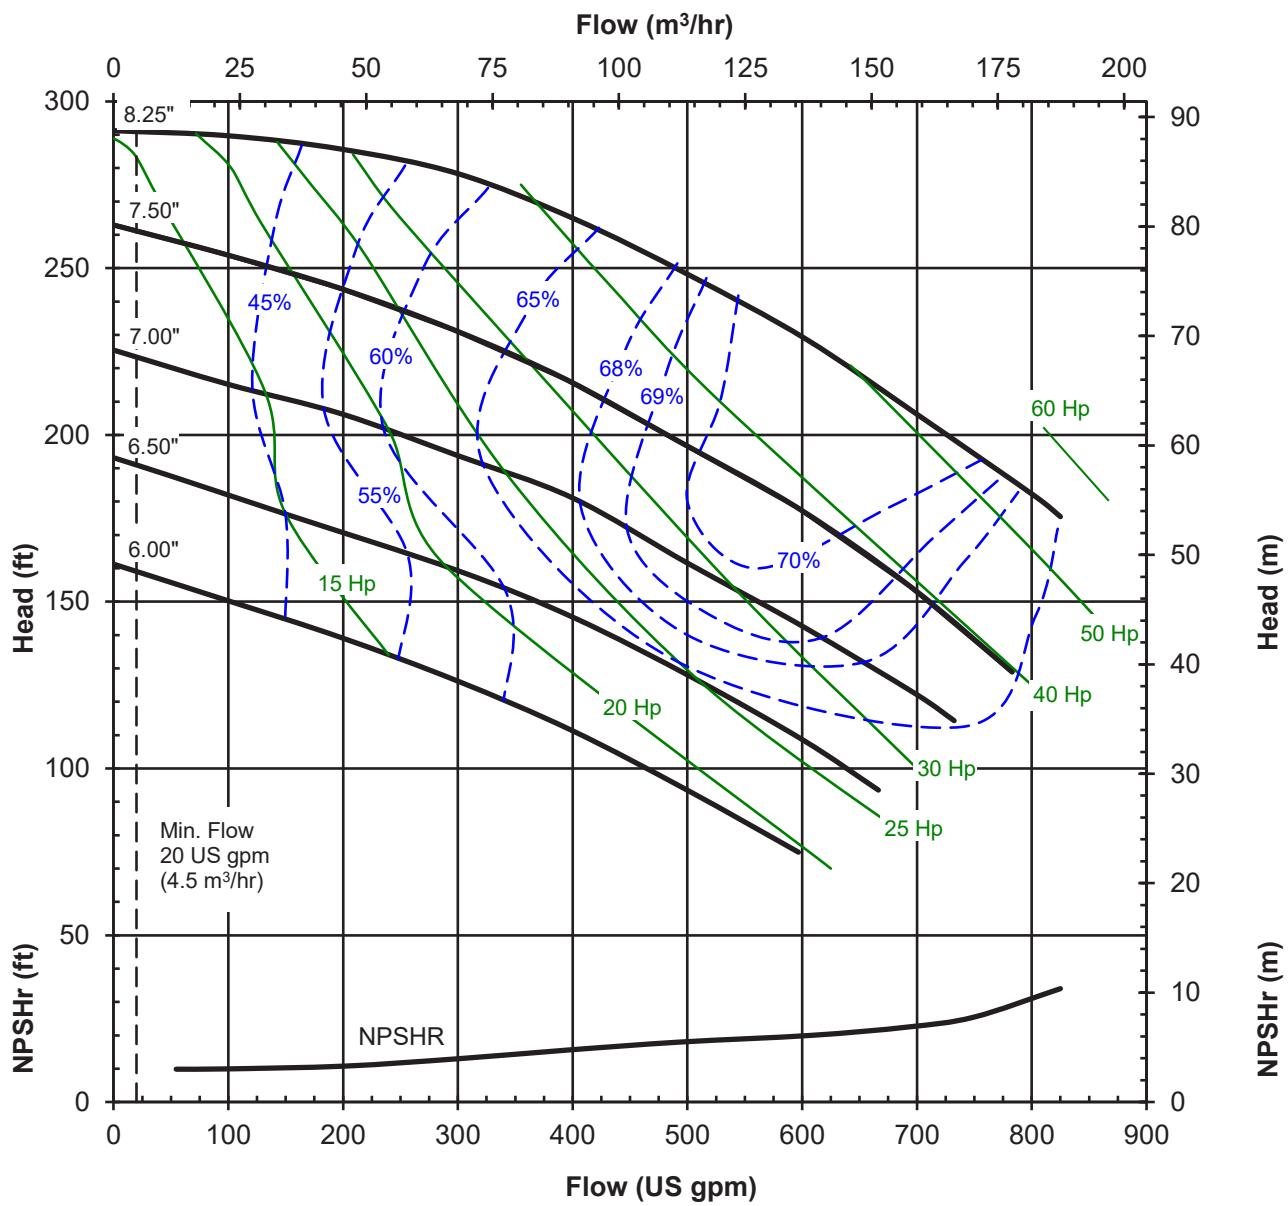


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

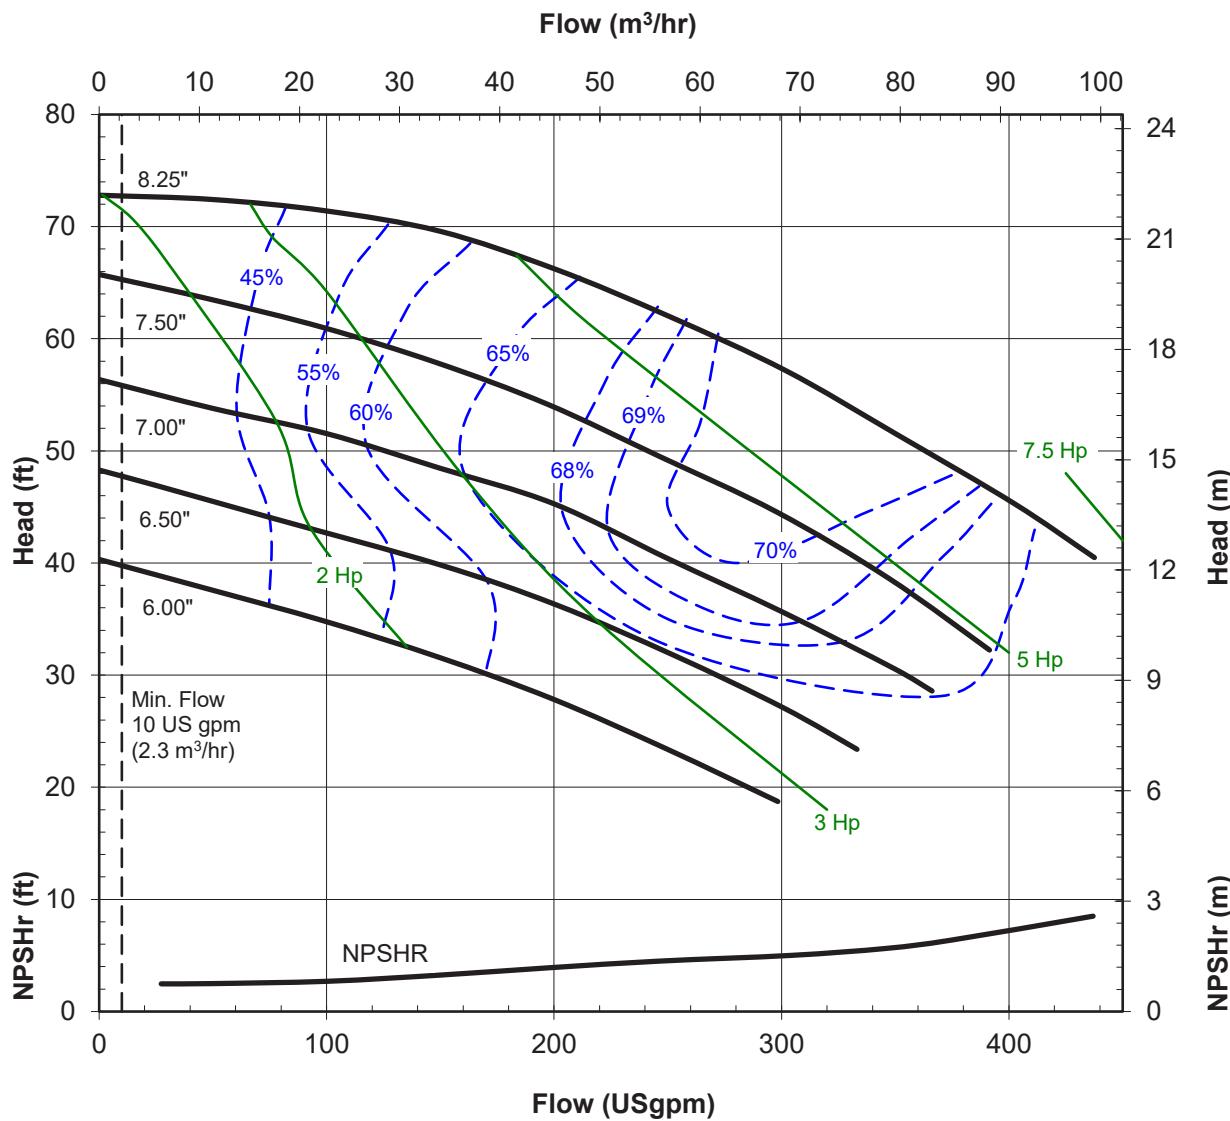**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**
MODEL: UC438
1750 rpm, 60 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC438
2900 rpm, 50 Hz
Suction: 4"
Discharge: 3"
S.G. 1.0

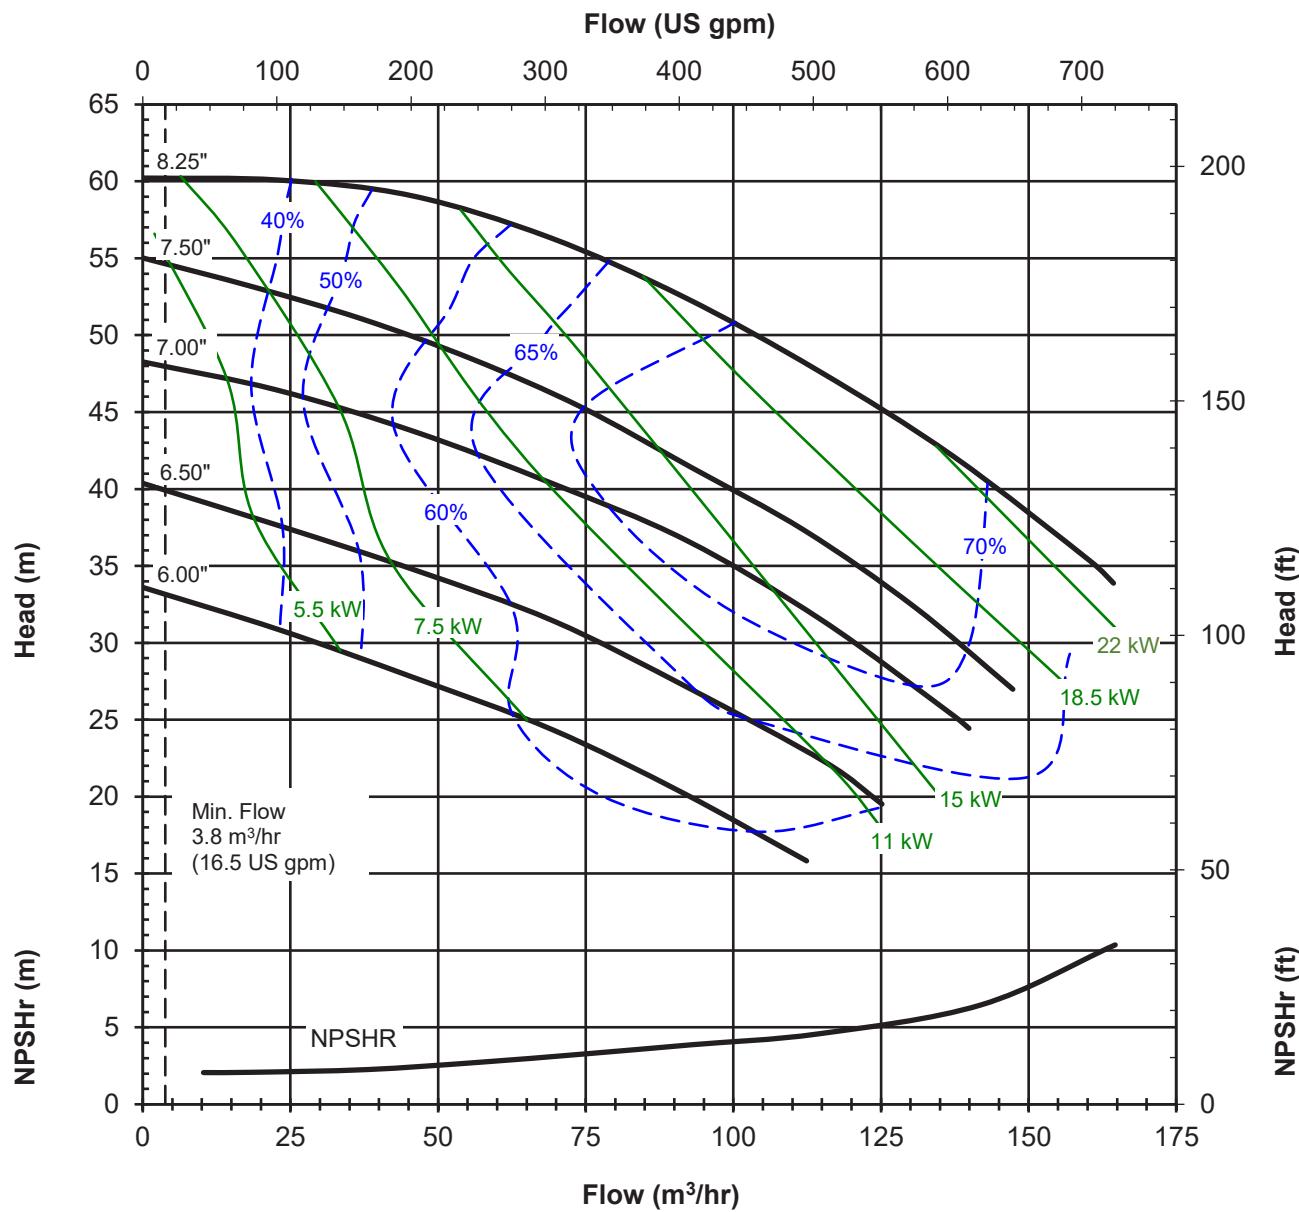

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

**UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE**


MODEL: UC438
 1450 rpm, 50 Hz
 Suction: 4"
 Discharge: 3"
 S.G. 1.0

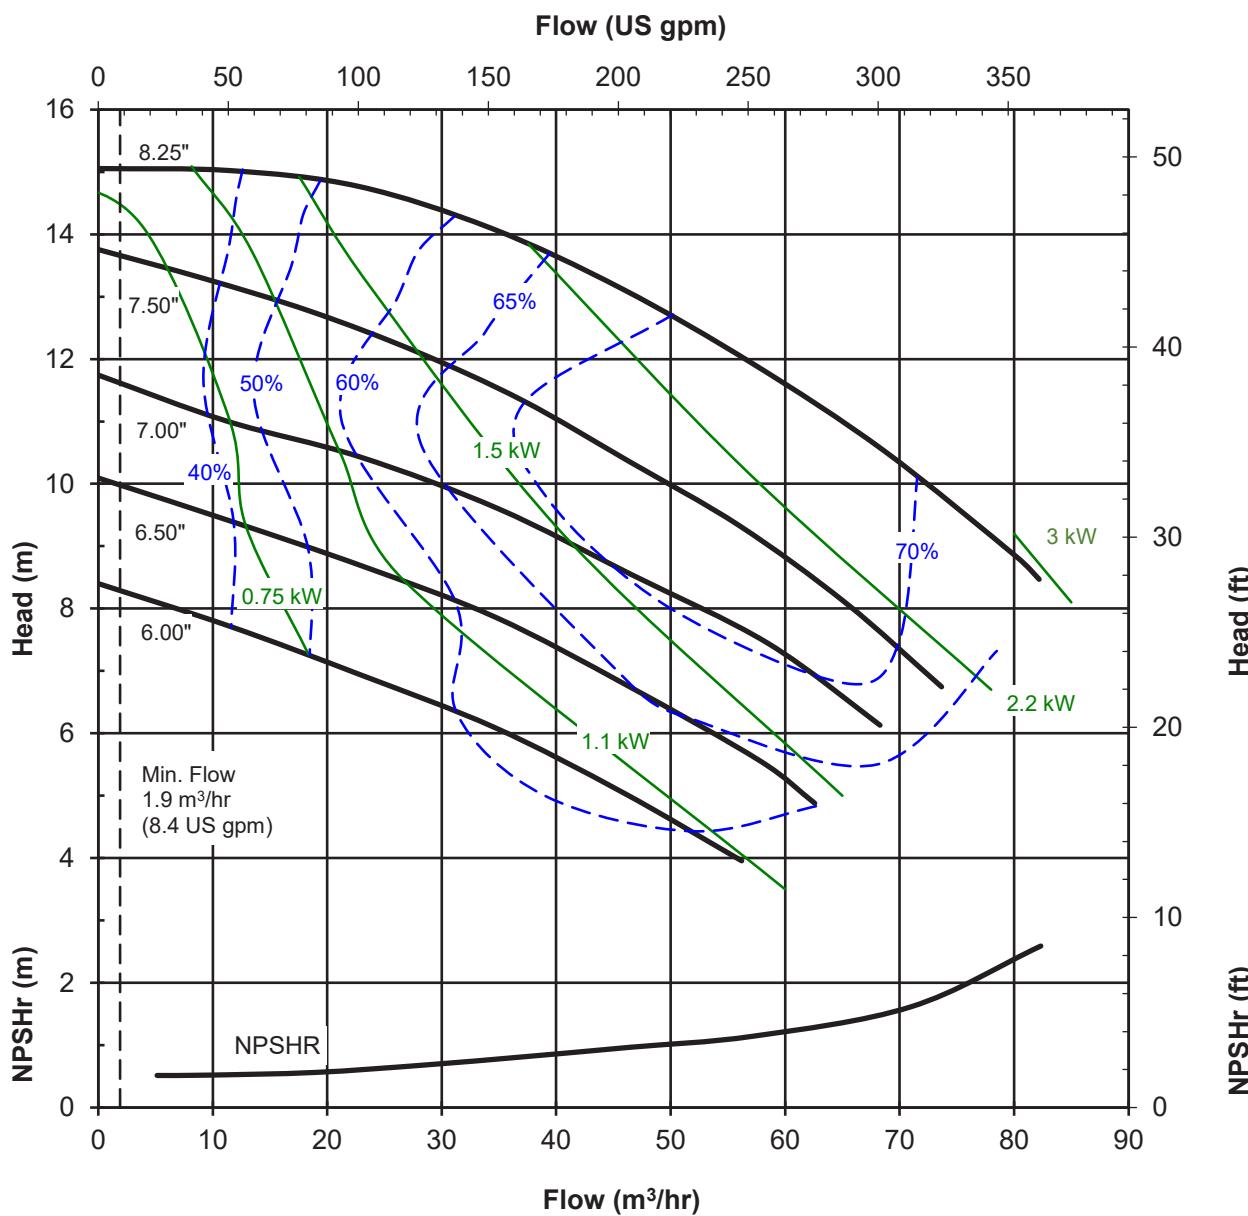

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
STANDARD HORIZONTAL
PERFORMANCE CURVE


MODEL: UC4310H
 1750 rpm, 60 Hz
 Suction: 4"
 Discharge: 3"
 S.G. 1.0

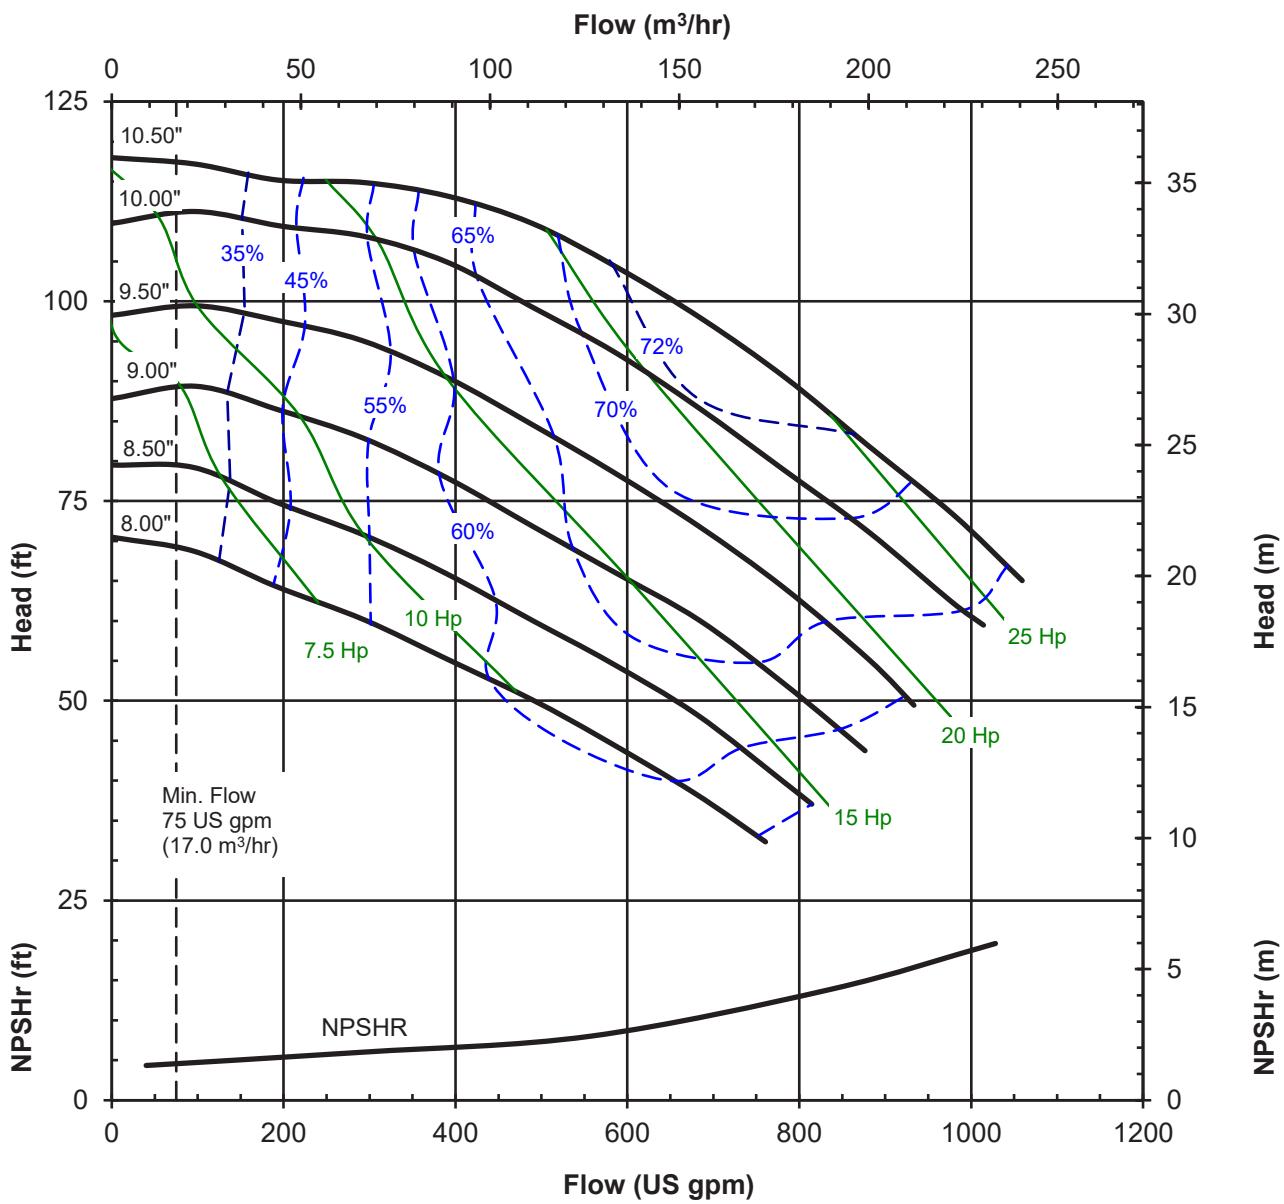

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE

MODEL: UC4310H
 1450 rpm, 50 Hz
 Suction: 4"
 Discharge: 3"
 S.G. 1.0

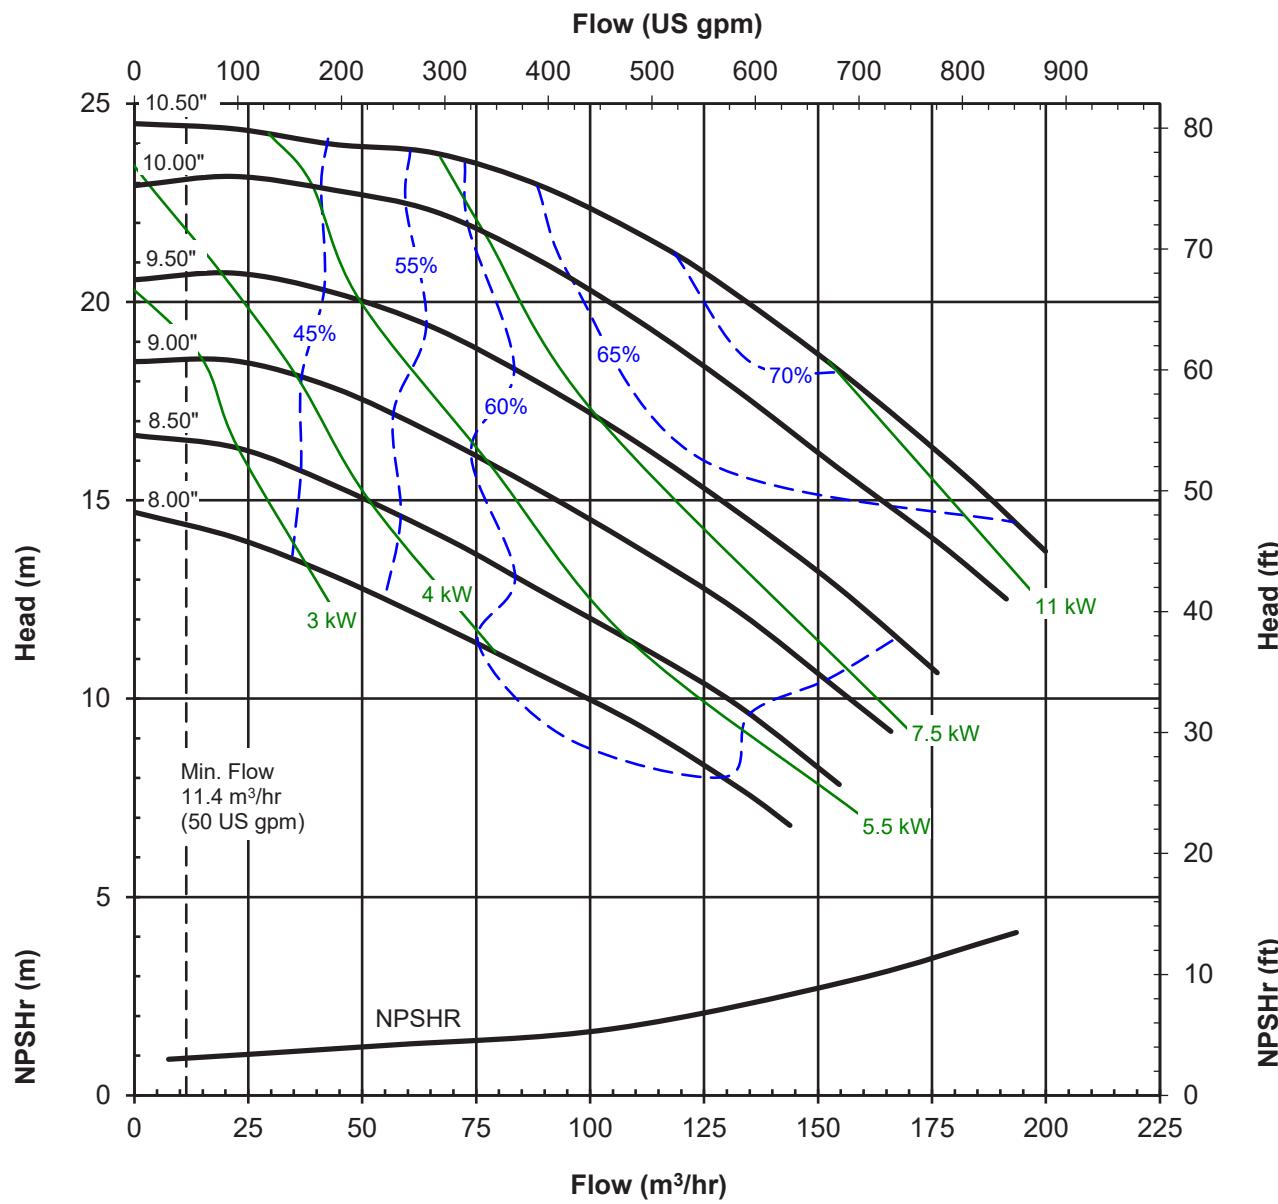

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC6410

1750 rpm, 60 Hz

Suction: 6"

Discharge: 4"

S.G. 1.0

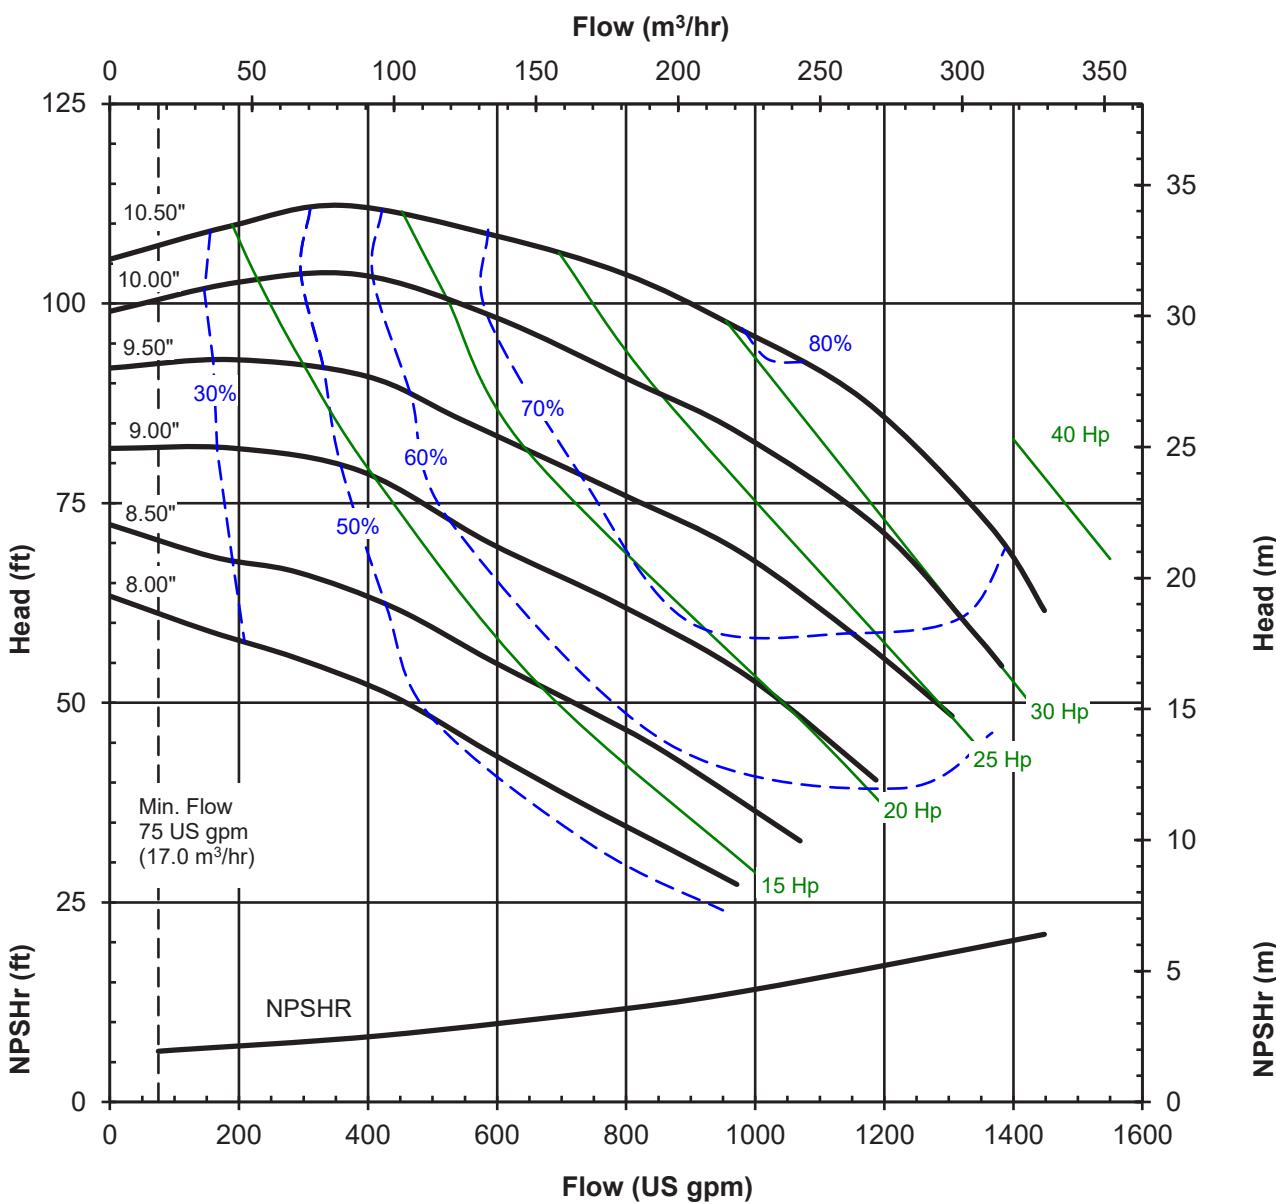

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.

UC SERIES
 STANDARD HORIZONTAL
 PERFORMANCE CURVE


MODEL: UC6410

1450 rpm, 50 Hz

Suction: 6"

Discharge: 4"

S.G. 1.0

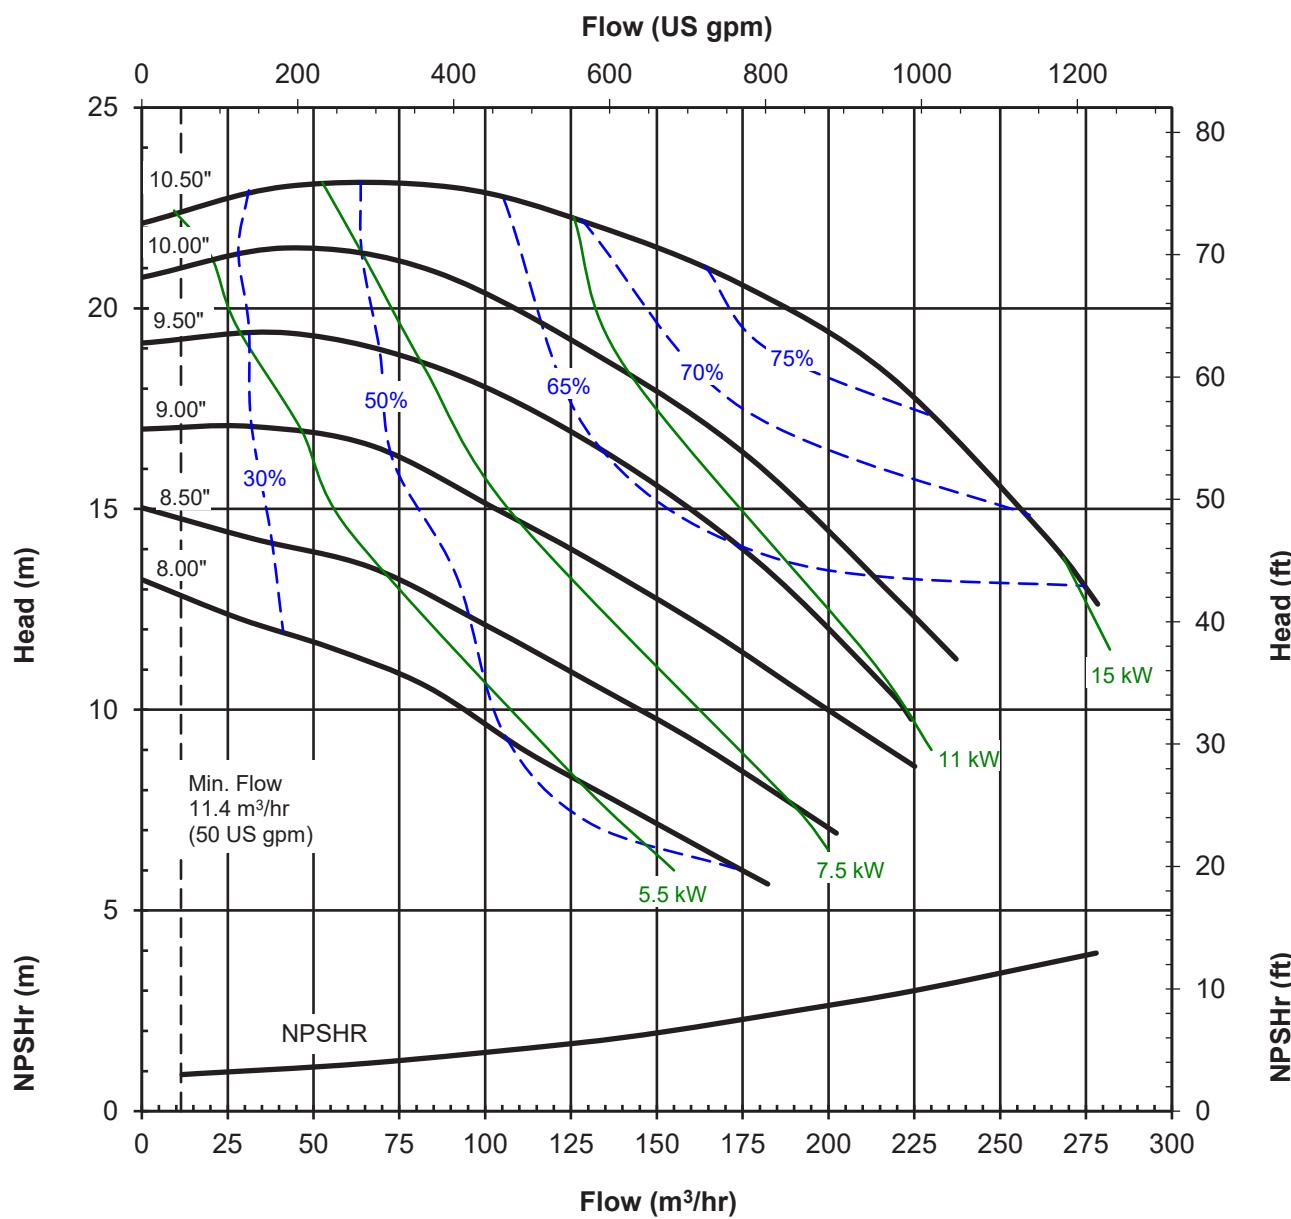

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.13") between all curves.