

BALDOR® • RELIANCE

Product Information Packet

JL3503A

.5HP,3450RPM,1PH,60HZ,56J,3420L,TEFC,F1

Part Detail							
Revision:	M	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3420L	Elec. Spec:	34WG3626	CD Diagram:	CD0094
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34-3099	Layout:	34LY3099
Frame:	56J	Mounting:	F1	Poles:	02	Created Date:	
Base:	N	Rotation:	FOS	Insulation:	B	Eff. Date:	06-01-2016
Leads:	4#18,1#16 #4TH	Y				Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1257L	
CAT.NO.	JL3503A
SPEC.	34-3099-3626G3
HP	.5
VOLTS	115/208-230
AMP	7.4/4.1-3.7
RPM	3450
FRAME	56J
SER.F.	1.60
NEMA-NOM-EFF	62
RATING	40C AMB-CONT
CC	
DE	6203
ENCL	TEFC
	SFA 9.8/5.2-4.9

CODE	K	DES	N	CL	B	PH	1
PF	69	USABLE AT 208V					
ODE	6203	SN					

Parts List		
Part Number	Description	Quantity
SA089115	SA 34-3099-3626G3	1.000 EA
RA081970	RA 34-3099-3626G3	1.000 EA
EC1189A02SP	61B2D120189NNBA ELEC CAP, 189-227MFD, 12	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
34EP3102A01SP	FR ENDPLATE, MACH	1.000 EA
NS2500A01	INSULATOR, AUTO THER PROT	1.000 EA
34CB4800SP	CAPACITOR COVER, STAMPED PRIMED	1.000 EA
34GS3000SP	GASKET, CAPACITOR BOX	1.000 EA
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3300A24SP	PU ENDPLATE, MACH	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 EA
34FH4002A03SP	IEC FH NO GREASER W/.88 DIA SHAFT HOLE,	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
WD4100A81	CAPLUG BPF-7/8, FOR .86-.88 HOLE	1.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
SP5056A79	MODEL 34 TYPE L STATIONARY SWITCH WITH L	1.000 EA
HA3100A15	THRUBOLT 10-32 X 8.375	4.000 EA
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 EA
LC0031	CONNECTION LABEL	1.000 EA
NP1257L	ALUM UL CSA CC THERMAL REV MTG	1.000 EA
35PA1000	PKG GRP, PRINT PK1008A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
PK3083T	STYROFOAM PACKING CRADLE W/TAPE	1.000 EA

Accessories		
Part Number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data
Record # 6693 - Typical performance - not guaranteed values


Winding: 34WG3626-R002	Type: 3420L	Enclosure: TEFC
-------------------------------	--------------------	------------------------


Nameplate Data				230 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.5			Full Load Torque	0.75 LB-FT
Volts	115/208-230			Start Configuration	direct on line
Full Load Amps	7.4/4.1-3.7			Breakdown Torque	2.5 LB-FT
R.P.M.	3450			Pull-up Torque	1.4 LB-FT
Hz	60	Phase	1	Locked-rotor Torque	2 LB-FT
NEMA Design Code	N	KVA Code	K	Starting Current	19.5 A
Service Factor (S.F.)	1.6			No-load Current	2.75 A
NEMA Nom. Eff.	62	Power Factor	69	Line-line Res. @ 25°C	3.56 Ω A Ph 2.56 Ω B Ph
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	61°C
S.F. Amps	9.8/5.2-4.9			Temp. Rise @ S.F. Load	78°C

Load Characteristics 230 V, 60 Hz, 0.5 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	51	62	70	76	80	84
Efficiency	36.5	52.1	60.2	64.6	66.9	67.7	70.1
Speed	3564	3542	3518	3492	3463	3431	3422
Line amperes	2.85	3.05	3.3	3.6	4	4.5	4.56

Performance Graph at 230V, 60Hz, 0.5HP Typical performance - Not guaranteed values

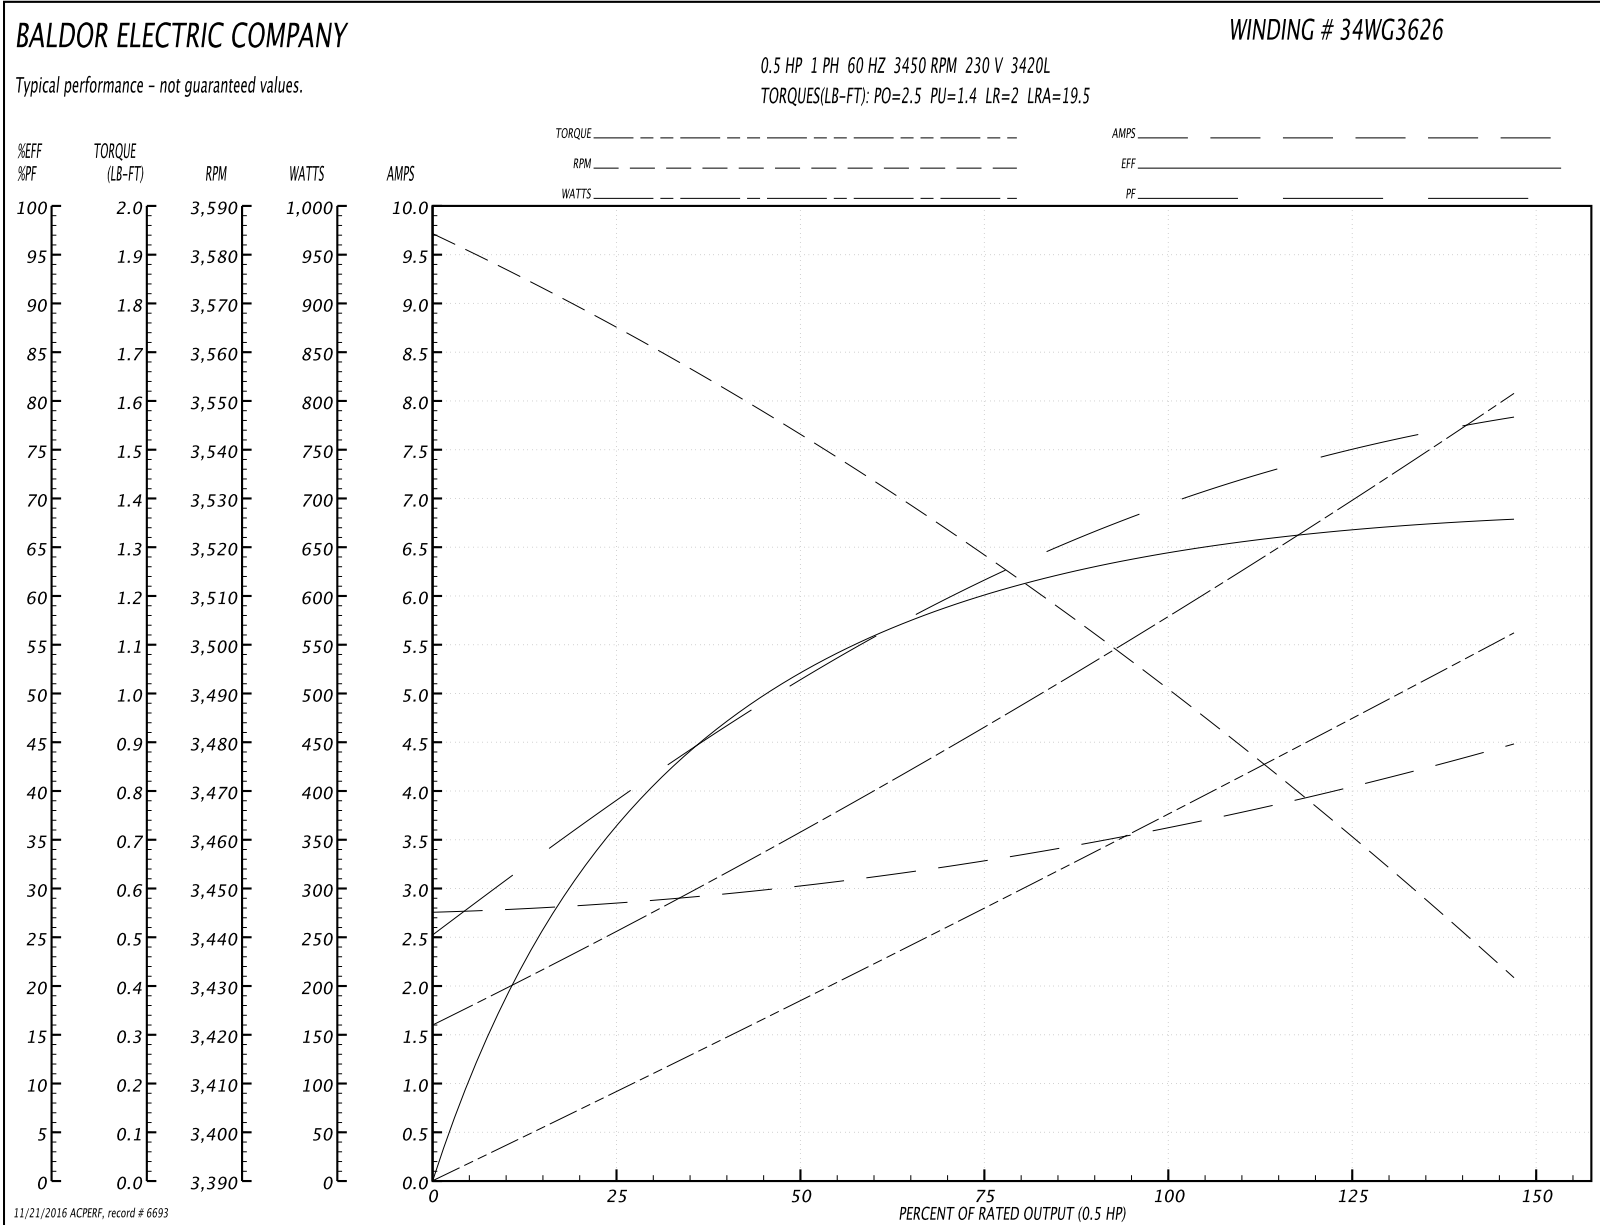

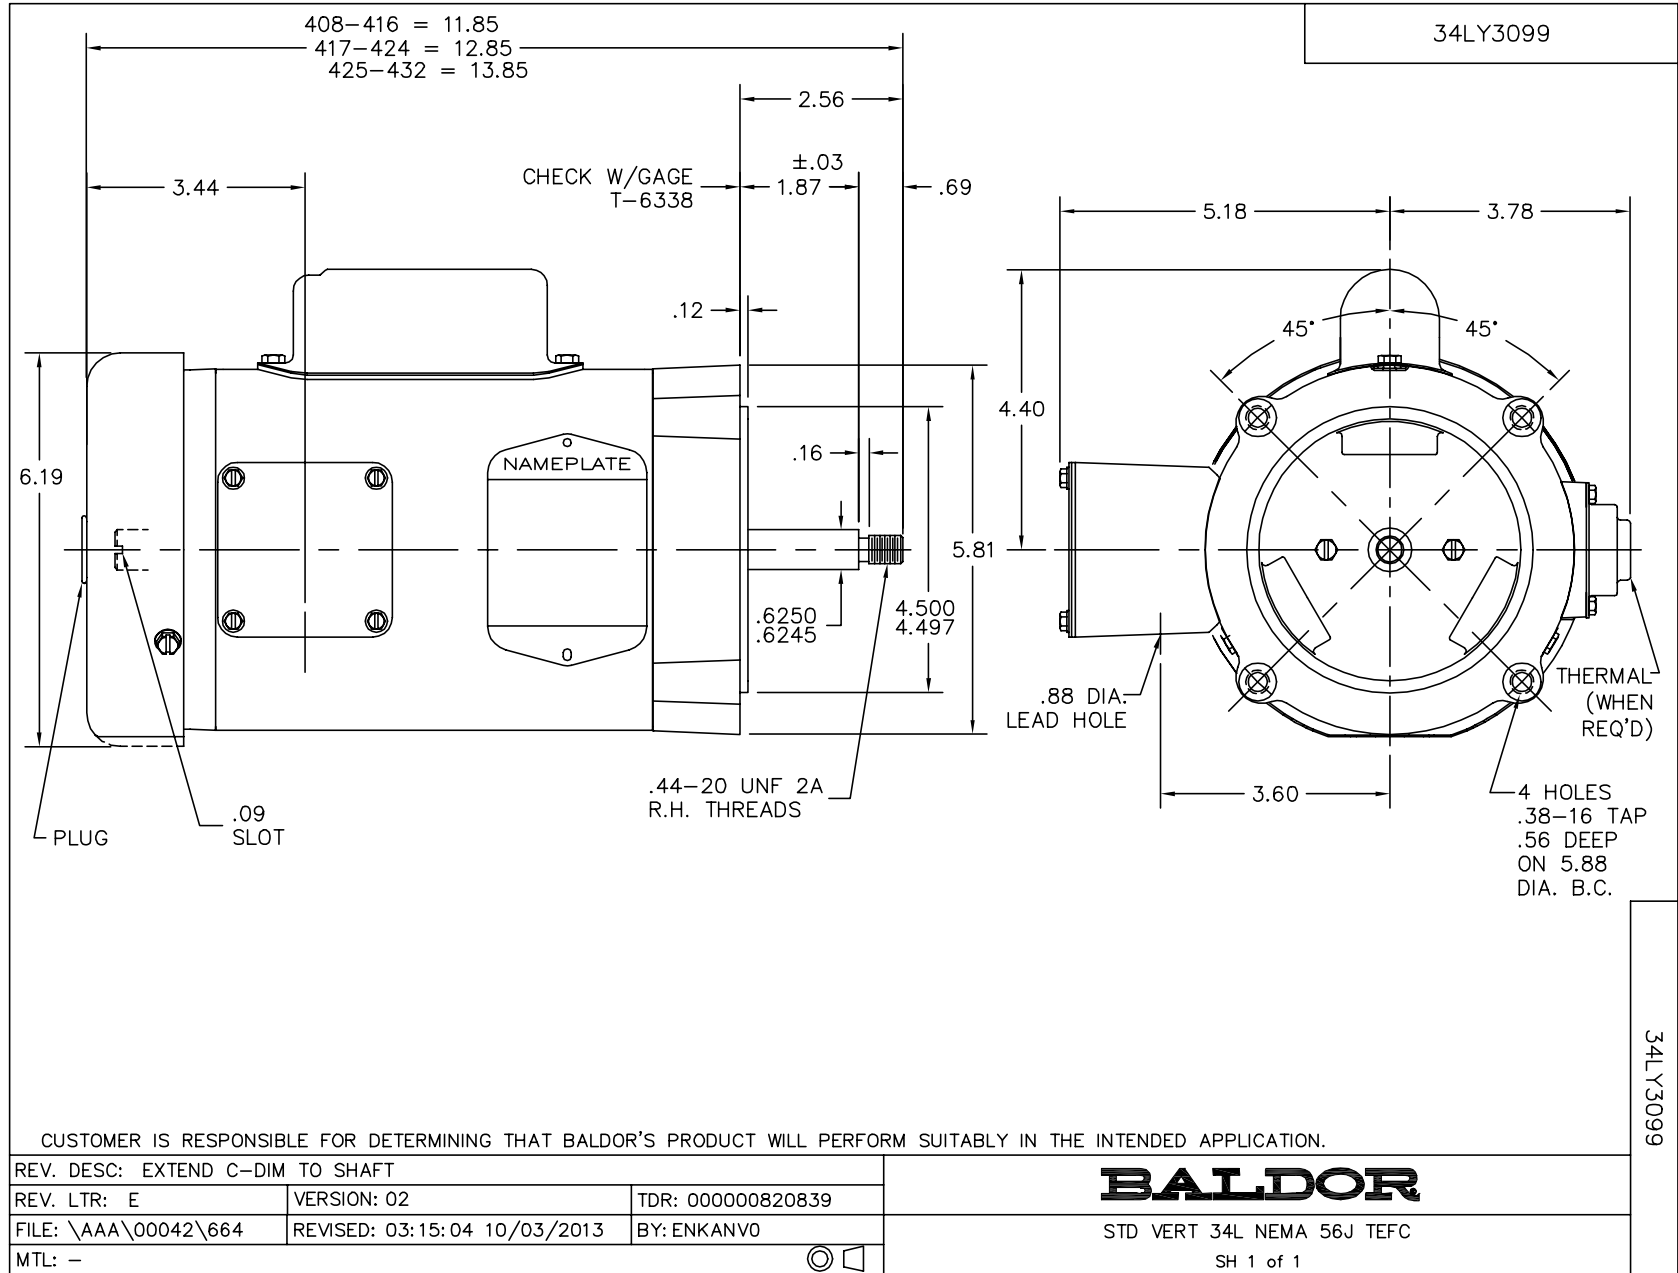

CD0094

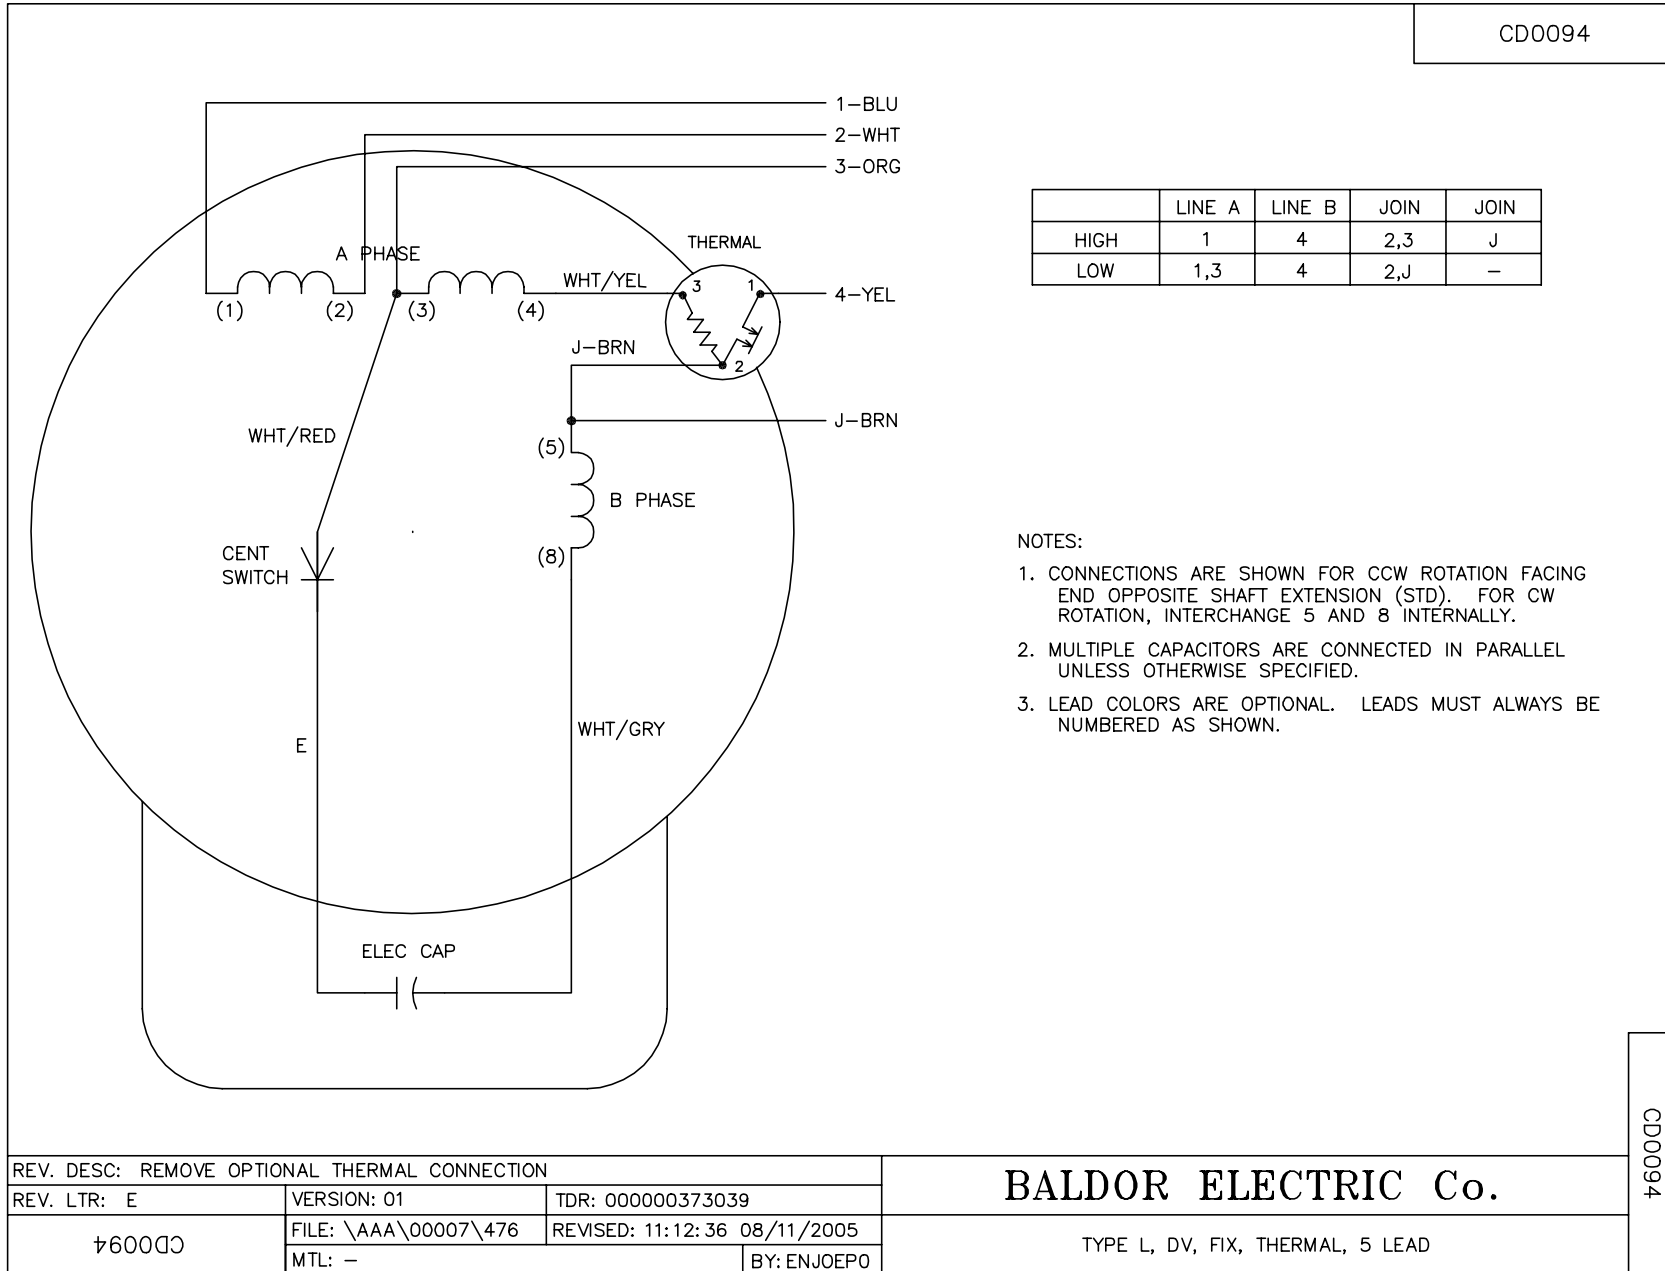

CD0094

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION			
REV. LTR: E	VERSION: 01	TDR: 000000373039	
CD0094	FILE: \AAA\00007\476	REVISED: 11:12:36 08/11/2005	
	MTL: -	BY: ENJOEPO	

BALDOR ELECTRIC Co.

TYPE L, DV, FIX, THERMAL, 5 LEAD