

BALDOR® • **RELIANCE**

Product Information Packet

L1408T-50

3HP,1425RPM,1PH,50HZ,184T,3646LC,OPEN,F1

Part Detail							
Revision:	AN	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3646LC	Elec. Spec:	36WGX359	CD Diagram:	CD0055
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	36E002	Layout:	36LYE002
Frame:	184T	Mounting:	F1	Poles:	04	Created Date:	
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	09-10-2015
Leads:	4#14 A PH,2#16 B PH					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1372L										
CAT.NO.	L1408T-50									
SPEC.	36E02X359									
HP	3									
VOLTS	110/220									
AMP	32/16									
RPM	1425									
FRAME	184T				HZ	50			PH	1
SER.F.	1.15		CODE	G	DES	L		CL	B	
NEMA-NOM-EFF	75.5		PF	85						
RATING	40C AMB-CONT									
CC									USABLE AT 208V	
DE	6206				ODE	6205				
ENCL	OPEN		SN							
	IP23									

Parts List		
Part Number	Description	Quantity
SA034429	SA 36E02X359	1.000 EA
RA030457	RA 36E02X359	1.000 EA
OC3030F11SP	CYL OIL CAP 30MFD/370V	1.000 EA
EC1850A06SP	ELEC CAP 115V 2.0 X 4.3 X	1.000 EA
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	BRASS CUP WASHER, FOR #8 SCREW	1.000 EA
36EP3200A01	FR ENDPLATE, ASSEMBLY FOR ROUTING	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
SP1008A01	BAFFLE, MODEL 36 & 37	1.000 EA
13XF0832A08	8-32 X.50 PAN HD,SLTD, TYPE F SCREW, ZIN	2.000 EA
10XN2520A12	O1/4-20X 3/4 HEX HEAD CAP	2.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36PE3201A01	PU ENDPLATE, ASSEMBLY FOR ROUTING	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 EA
36CB4516	36 LIPPED CB LID	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501E16	3KEY, 1/4 SQ X 1.750	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
HA6362ZP	LIFTING LUG FOR 36 FRAME MOTORS.	2.000 EA
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	2.000 EA

Parts List (continued)		
Part Number	Description	Quantity
36CB3800SP	CAPACITOR COVER, CAST	1.000 EA
HA7010A01	CAPACITOR RETENTION CLAMP, 6.562 LONG	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.022 GA
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
HA3101A40	THRUBOLT 1/4-20 X 12.687	4.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
SP5172A05	37 TYPE LC TORQ STAT SW LEAD ASSEMBLY	1.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0001	CONN LABEL TYPE L, 6 LEAD, DUAL VOLTS, R	1.000 EA
NP1372L	ALUM UL CSA CE CC	1.000 EA
G7PA1000	PKG GRP, PRINT PK1034A06	1.000 EA

Accessories		
Part Number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 10960 - Typical performance - not guaranteed values


Winding: 36WGX359-R001	Type: 3646LC	Enclosure: OPEN
-------------------------------	---------------------	------------------------


Nameplate Data				220 V, 50 Hz: High Voltage Connection	
Rated Output (HP)	3			Full Load Torque	10.8 LB-FT
Volts	110/220			Start Configuration	direct on line
Full Load Amps	32/16			Breakdown Torque	24 LB-FT
R.P.M.	1425			Pull-up Torque	24 LB-FT
Hz	50	Phase	1	Locked-rotor Torque	33 LB-FT
NEMA Design Code	L	KVA Code	G	Starting Current	95 A
Service Factor (S.F.)	1.15			No-load Current	5.7 A
NEMA Nom. Eff.	75.5	Power Factor	85	Line-line Res. @ 25°C	0.828 Ω A Ph 0.999 Ω B Ph
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	80°C
S.F. Amps				Temp. Rise @ S.F. Load	90°C

Load Characteristics 220 V, 50 Hz, 3 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	54	66	76	83	87	90	85
Efficiency	70.8	78.5	82.5	75.6	70.2	62.6	72.4
Speed	1487	1466	1459	1425	1396	1348	1408
Line amperes	6.8	9.8	12.1	15.8	20	25	18.32

Performance Graph at 220V, 50Hz, 3.0HP Typical performance - Not guaranteed values

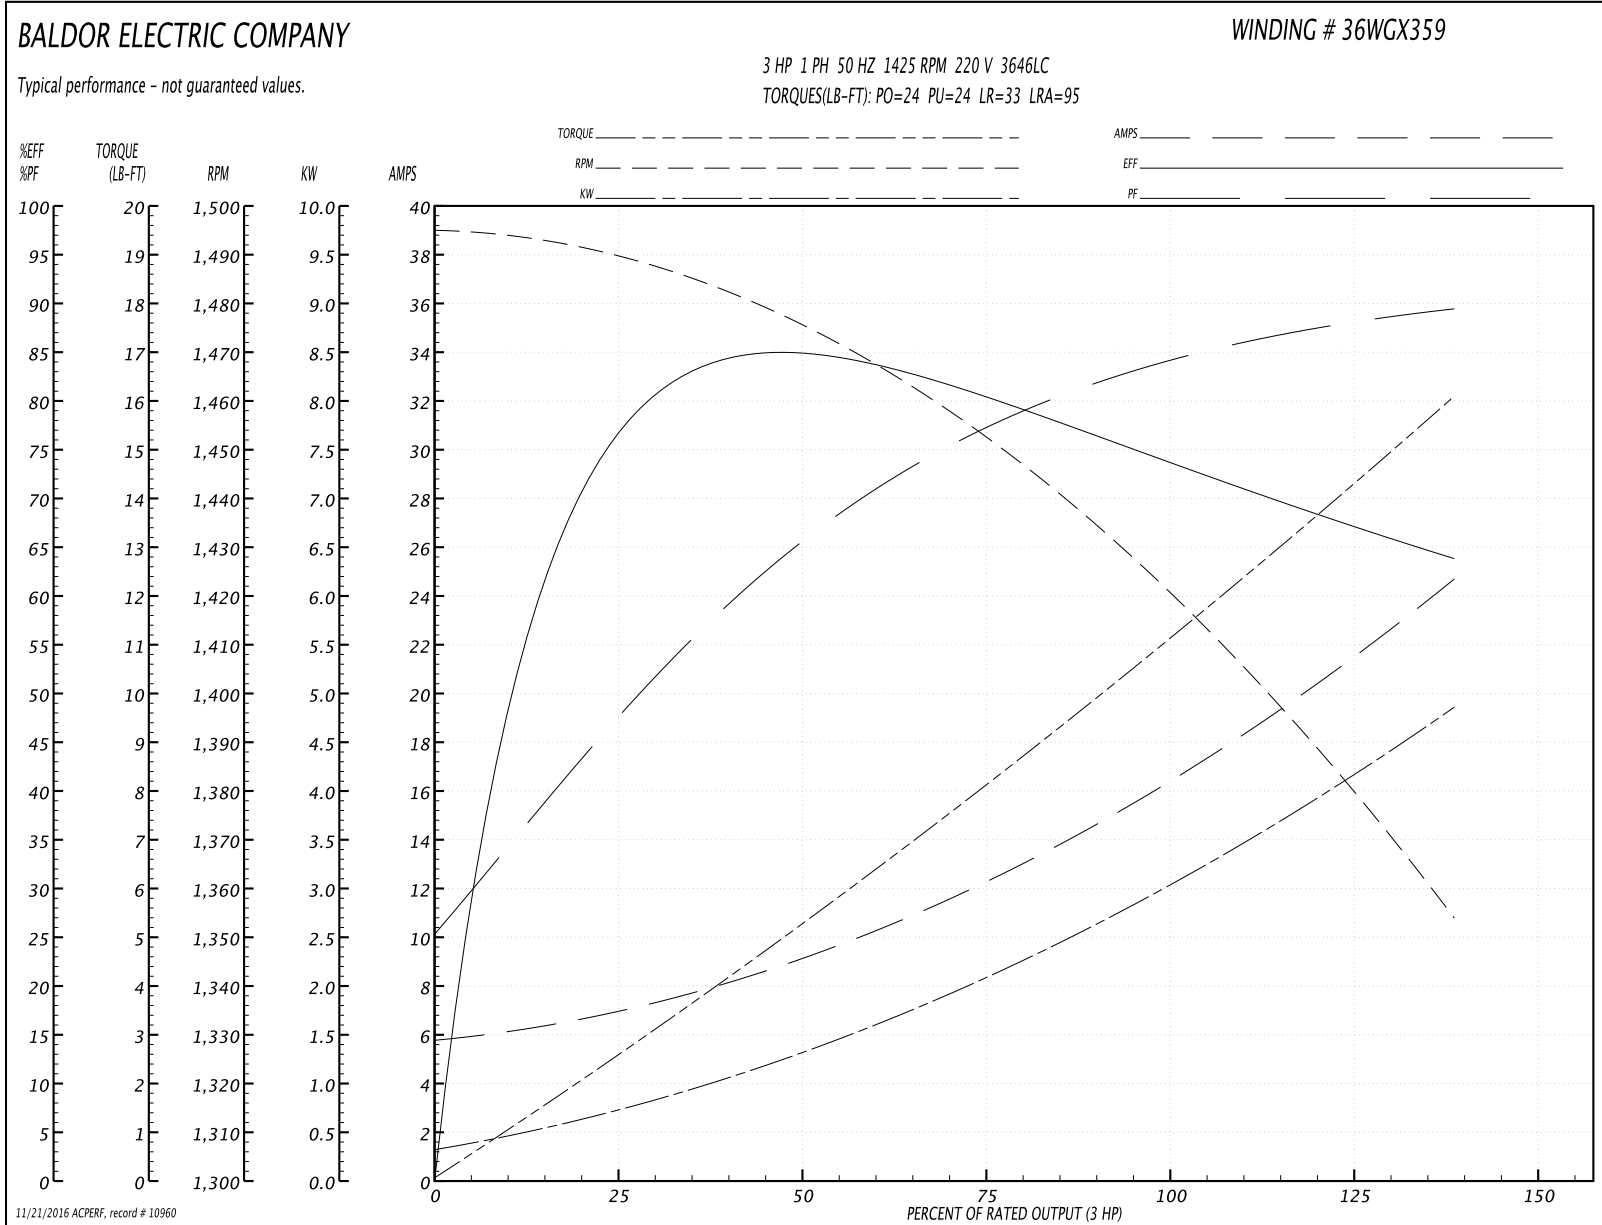

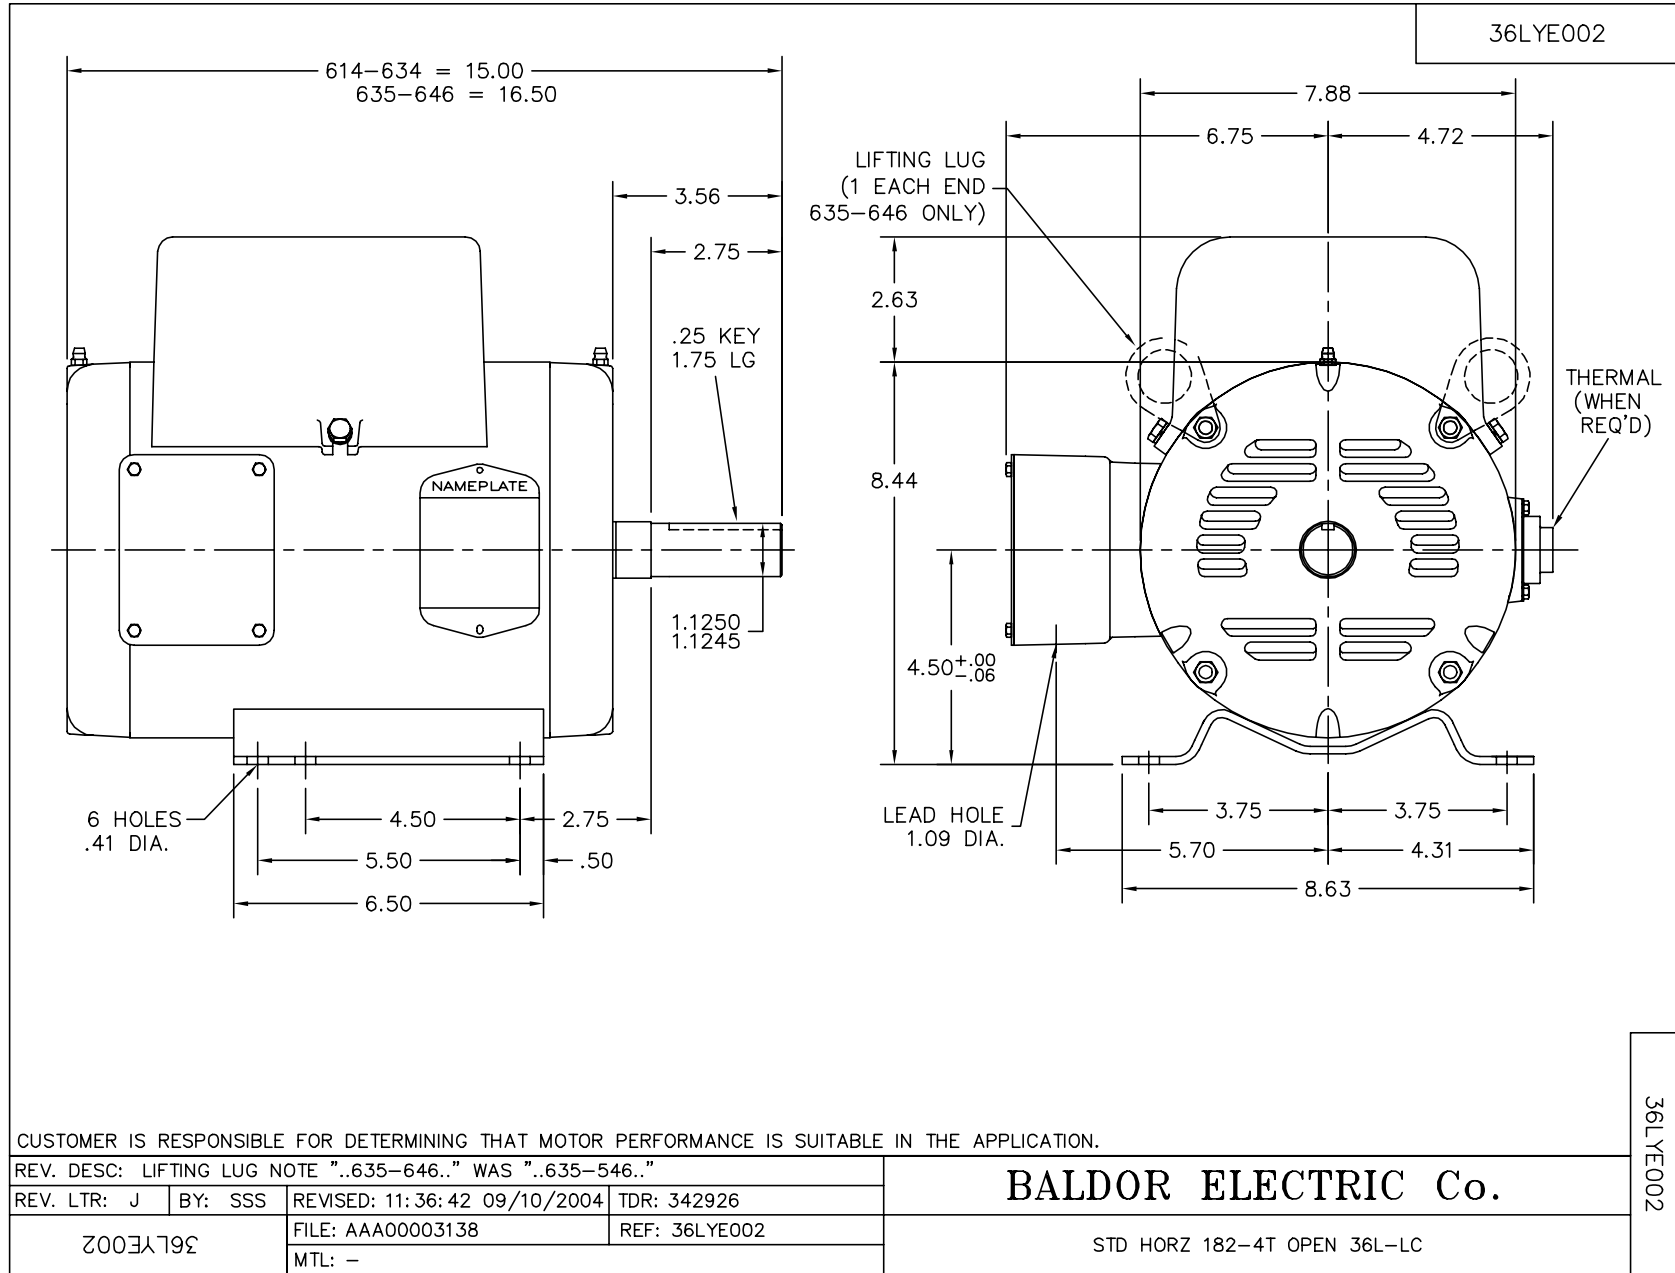

CD0055

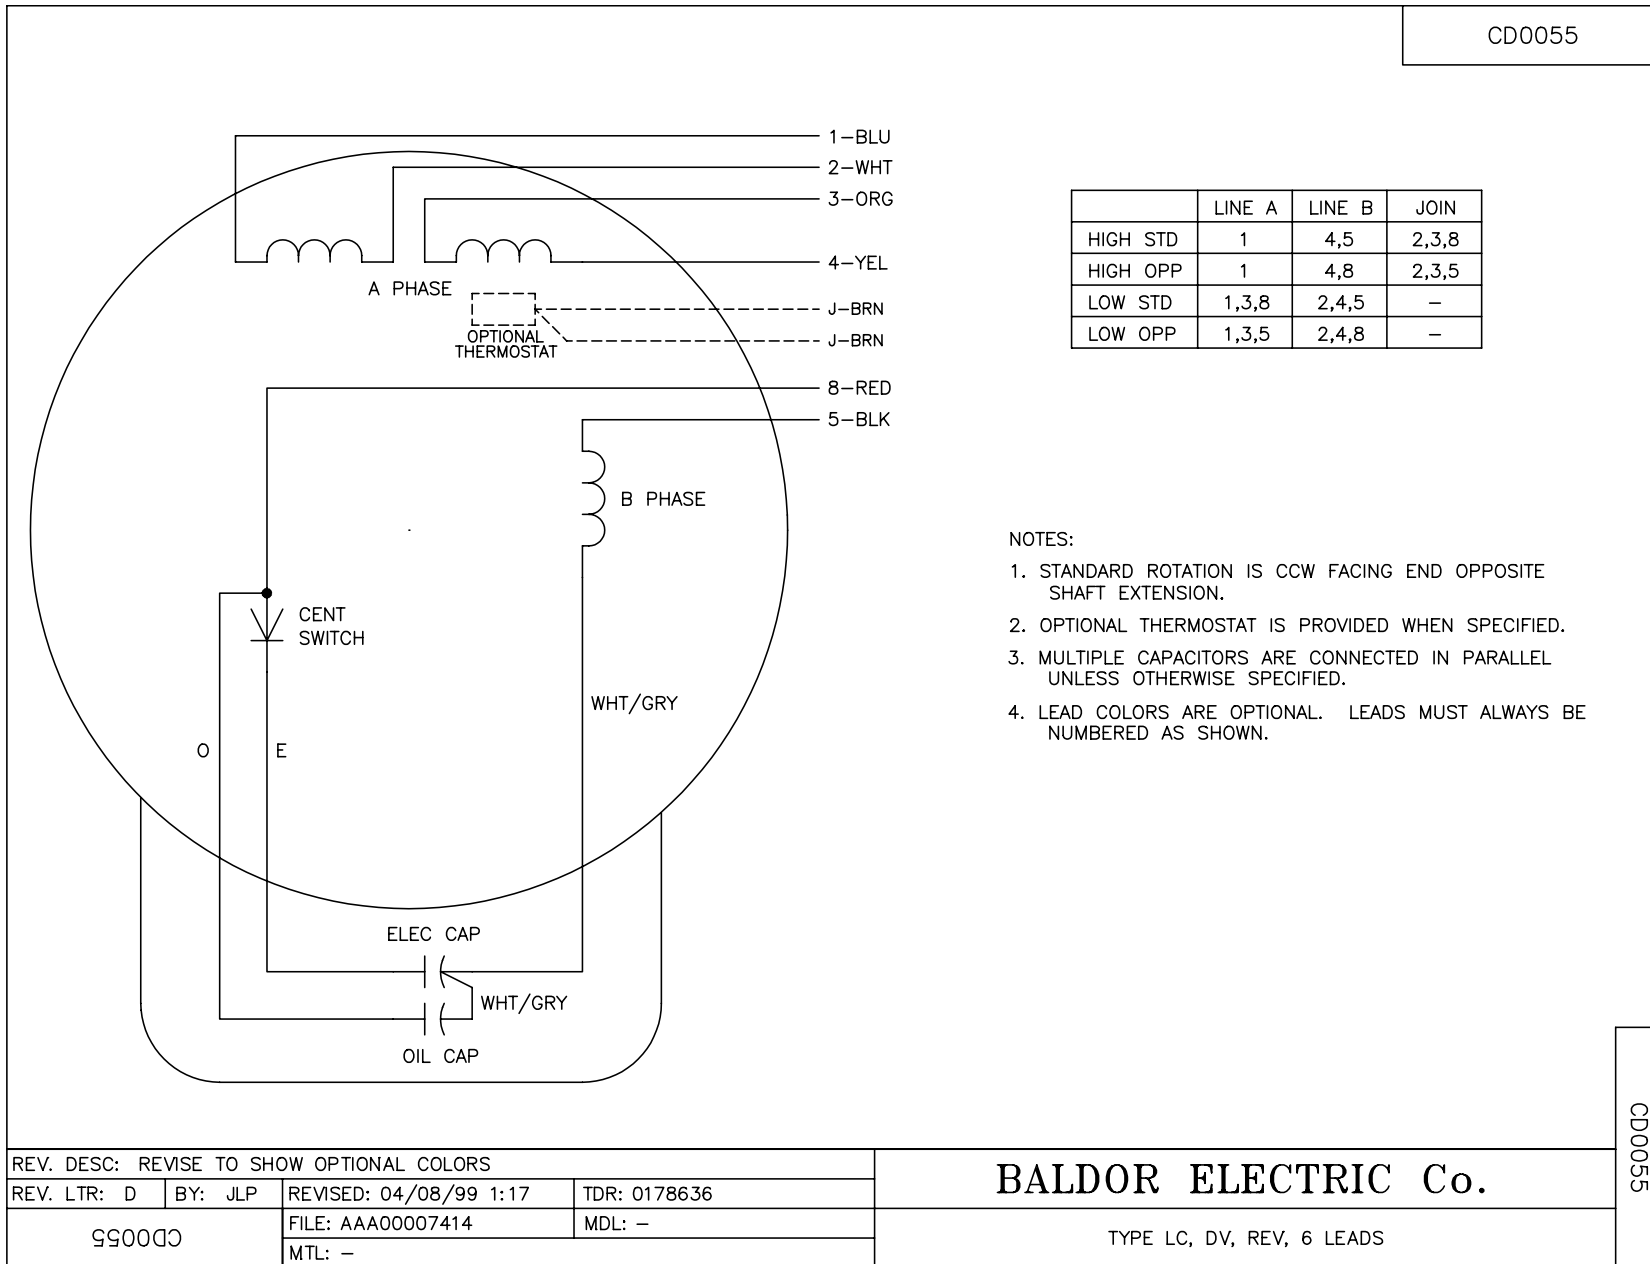

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
990000		FILE: AAA00007414	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, 6 LEADS

CD0055