

BALDOR® • RELIANCE

Product Information Packet

EM4308T

40HP,1185RPM,3PH,60HZ,364T,1468M,TEFC,F1

Part Detail							
Revision:	R	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	A36062M	Elec. Spec:	A36WG1194	CD Diagram:	416820-002
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:		Layout:	617428-011
Frame:	364T	Mounting:	F1	Poles:	06	Created Date:	10-19-2010
Base:		Rotation:	R	Insulation:	B	Eff. Date:	09-26-2016
Leads:	3#4,6#6					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP2383L

CAT.NO.	EM4308T	SPEC NO.	P36G3400
HP	40	AMPS	98.8/49.4
FRAME	364T	RPM	1190
DRIVE END BEARING	65BC03J30X	HZ	60
OPP D.E. BEARING	65BC03J30X	AMB	40
SER.NO.		SF	1.15
		DESIGN	B
		PHASE	3
		DUTY	CONT
		INSUL.CLASS	F
		TYPE	P
		ENCL	TEFC
		CODE	G
		POWER FACTOR	80
		NEMA-NOM-EFFICIENCY	94.1
		MAX CORR KVAR	12.0
		GUARANTEED EFFICIENCY	93.6
NEMA NOM/CSA QUOTED EFF		MOTOR WEIGHT	899

Parts List		
Part Number	Description	Quantity
SA209366	SA P36G3400	1.000 EA
RA196628	RA P36G3400	1.000 EA
000692000VD	LABEL WARNING	1.000 EA
NP2383L	SUPER-E ,SS, CC, CSA-C US, CSA EEV	1.000 EA
421948032	LABEL, MYLAR	1.000 EA
004824015A	GREASE POLYREX EM	0.544 LB
032018008AK	HHCS 1/4-20X1 PLATED	4.000 EA
032018012DK	HHCS 1/2-13X1-1/2 PLTD.	4.000 EA
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 EA
032018012DK	HHCS 1/2-13X1-1/2 PLTD.	4.000 EA
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
034690001AB	SQHDPLG, COND	1.000 EA
034180012DA	KEY 1X4X1/4X1-1/2 L	1.000 EA
034530052AB	P/NIP 1/8X6-1/2 GALV.	1.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
034690001AB	SQHDPLG, COND	1.000 EA
034690002AB	"unbulked" PPLG 1/4" PLTD.	1.000 EA
078550001M	FAN KB 60/30 (30) 360	1.000 EA
078559001A	+FANCV - 360	1.000 EA
085922073B	BRKT 360 085922072WCC KB	1.000 EA
410700004F	WSHR	1.000 EA
415072001B	CLAMP	1.000 EA
415096002A	CPLG 1/8 HEX TYPE	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
034690002AB	"unbulked" PPLG 1/4" PLTD.	1.000 EA
415045002E	SLGR	1.000 EA
085922073B	BRKT 360 085922072WCC KB	1.000 EA
032018005AK	HHCS 1/4-20X5/8 PLATED	4.000 EA
032018008CK	HHCS 3/8-16X1L PLATED	4.000 EA
033512004LB	HHTTS 1/4-20X1/2 PLTD.	1.000 EA
043292000AJ	GASK 320-400	1.000 EA
077176000L	C/BOX, PAINTED 360-400	1.000 EA
077176001A	CBOXC, PAINTED 360-400	1.000 EA
402731001A	GASK 360-440	1.000 EA
406099000A	PLUG - FAN COVER 320-440	1.000 EA
415000103D	T/LUG #4AWG-1/0AWG W/HOLE FOR .250 BOLT	1.000 EA
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.250 GA
033775004EA	DRSCR #6-1/4 304 S.S.	2.000 EA
034180034HA	KEY 5/8X5/8X4-1/4 L	1.000 EA
14PA1000	PACKAGING 314 GROUP COMBINED PRINT	1.000 EA
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 EA

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	364TY	40	P	3/60	1190	230/460
AMPS	DUTY	AMB [°] C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
98.8/49.4	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 [°] C OHMS (BETWEEN LINES)		
491378	418141-71JE	---	---	.0380/.152		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER FACTOR %	EFFICIENCY %	
NO LOAD	0	17.7	1200	5.41	0	
1/4	10.0	21.6	1197	48.3	90.0	
2/4	20.0	29.0	1194	69.0	93.6	
3/4	30.0	38.6	1191	77.2	94.3	
4/4	40.0	49.4	1188	80.5	94.2	
5/4	50.0	61.0	1184	81.9	93.7	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	158	280	290		
PULL UP	480	136	241	270		
BREAKDOWN	1135	243	430	167		
FULL LOAD	1188	100	177	49.4		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 94.1 % GUARANTEED MIN. EFF. 93.6%						



A MEMBER OF THE ABB GROUP

DR. BY T.G. KEIATTI

CK. BY D.H. MAY

APP. BY R.H. KIRK

DATE 10/12/06

A-C MOTOR

PERFORMANCE


DATA


A36WG1194-R001

ISSUE DATE **04/28/15**

C/R 312091


Printed on 4/28/15 11:48 @ piece-motor

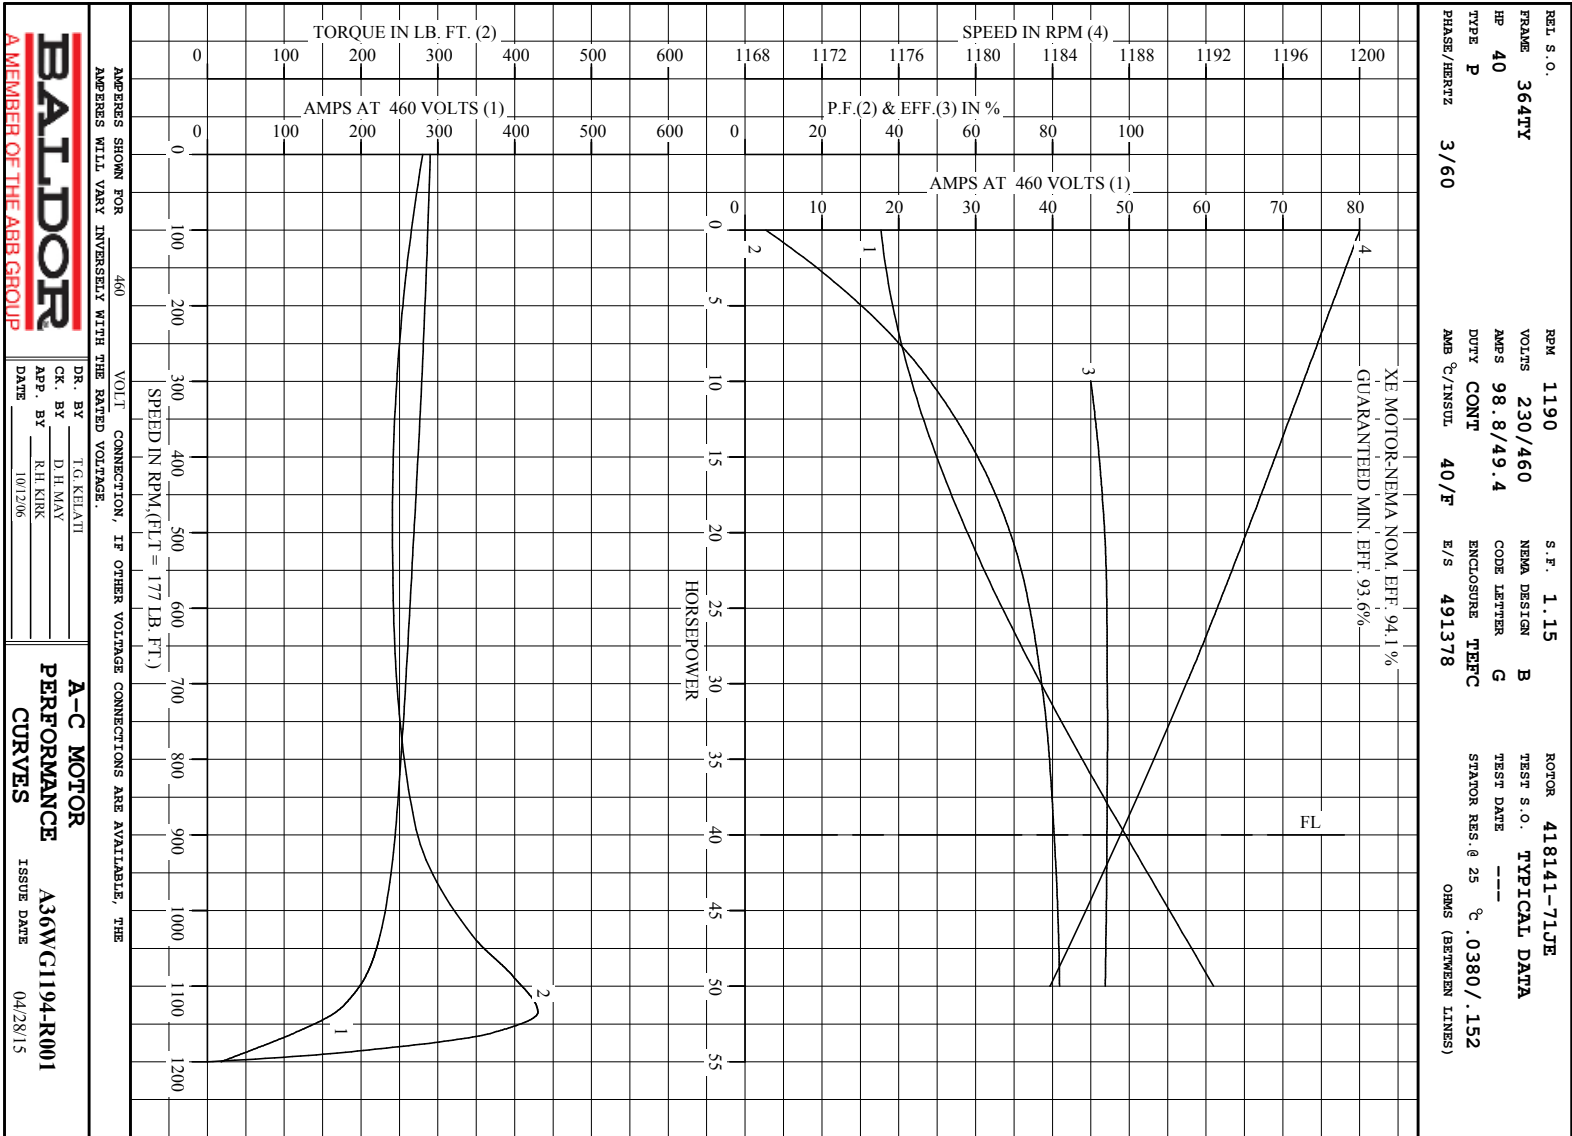

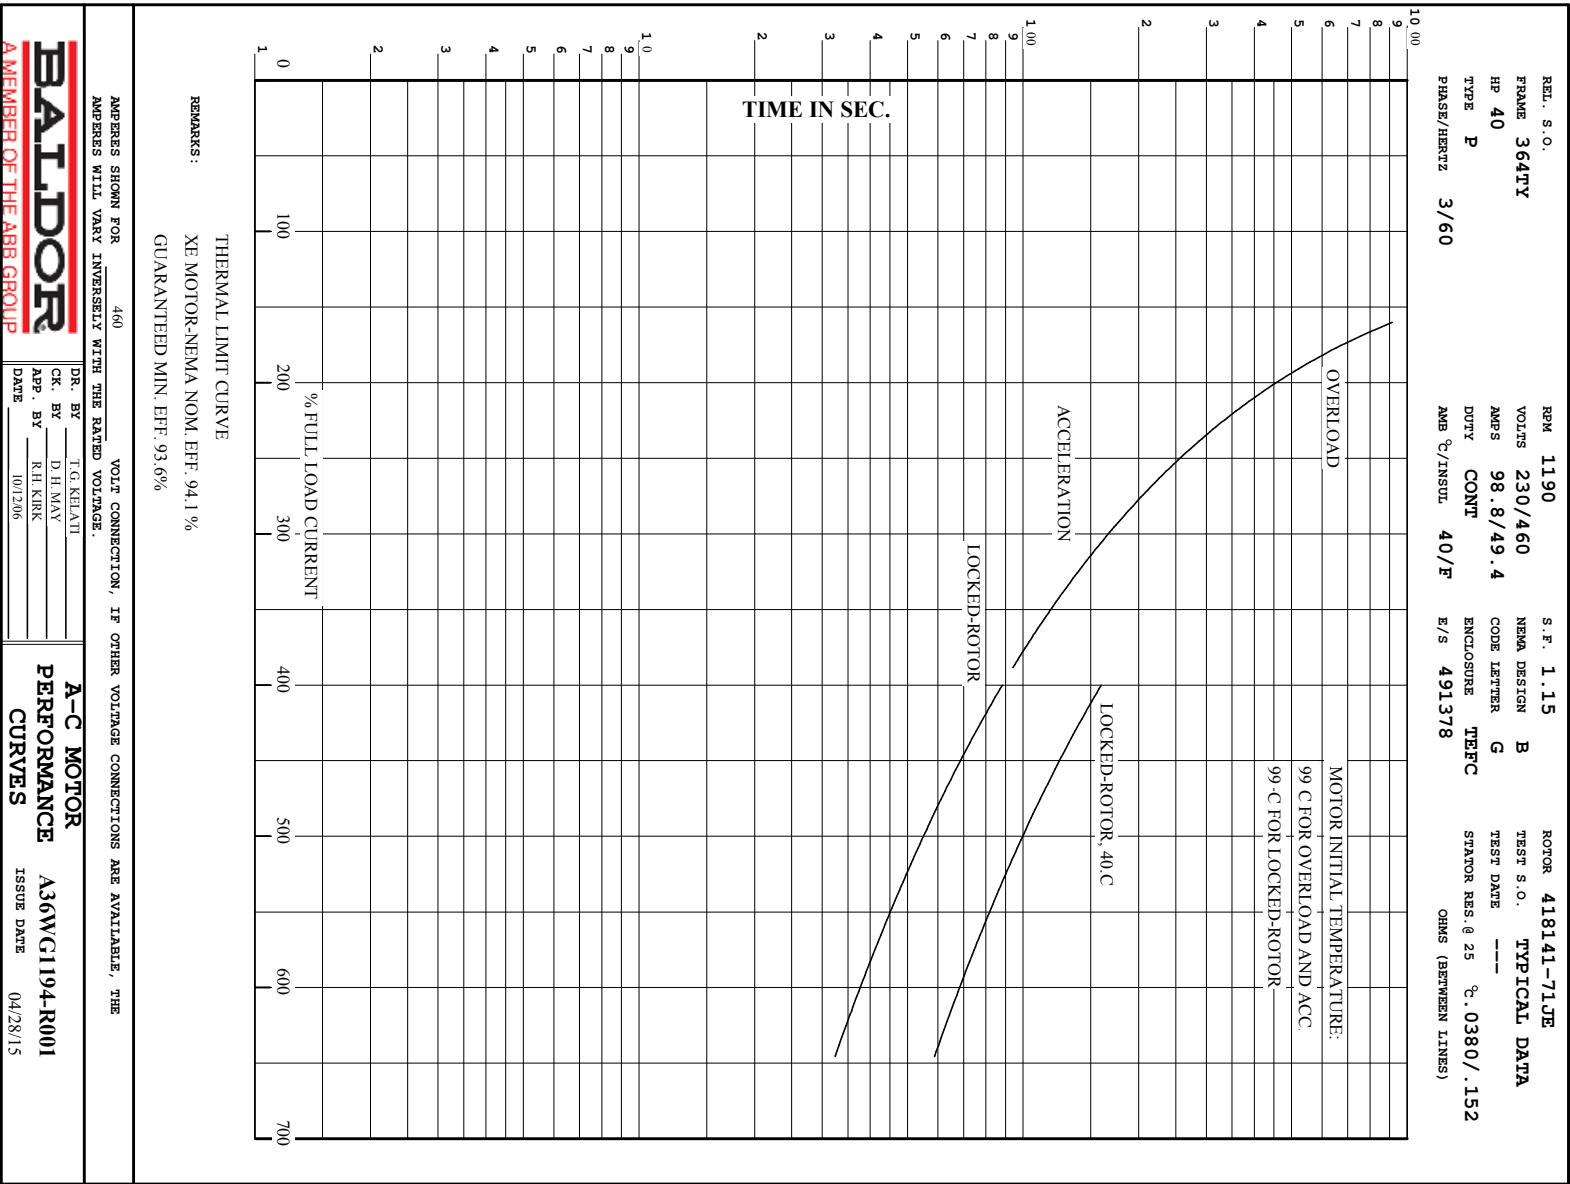



C/R 312091

Printed on 4/28/15 11:48 @ pscs-motor

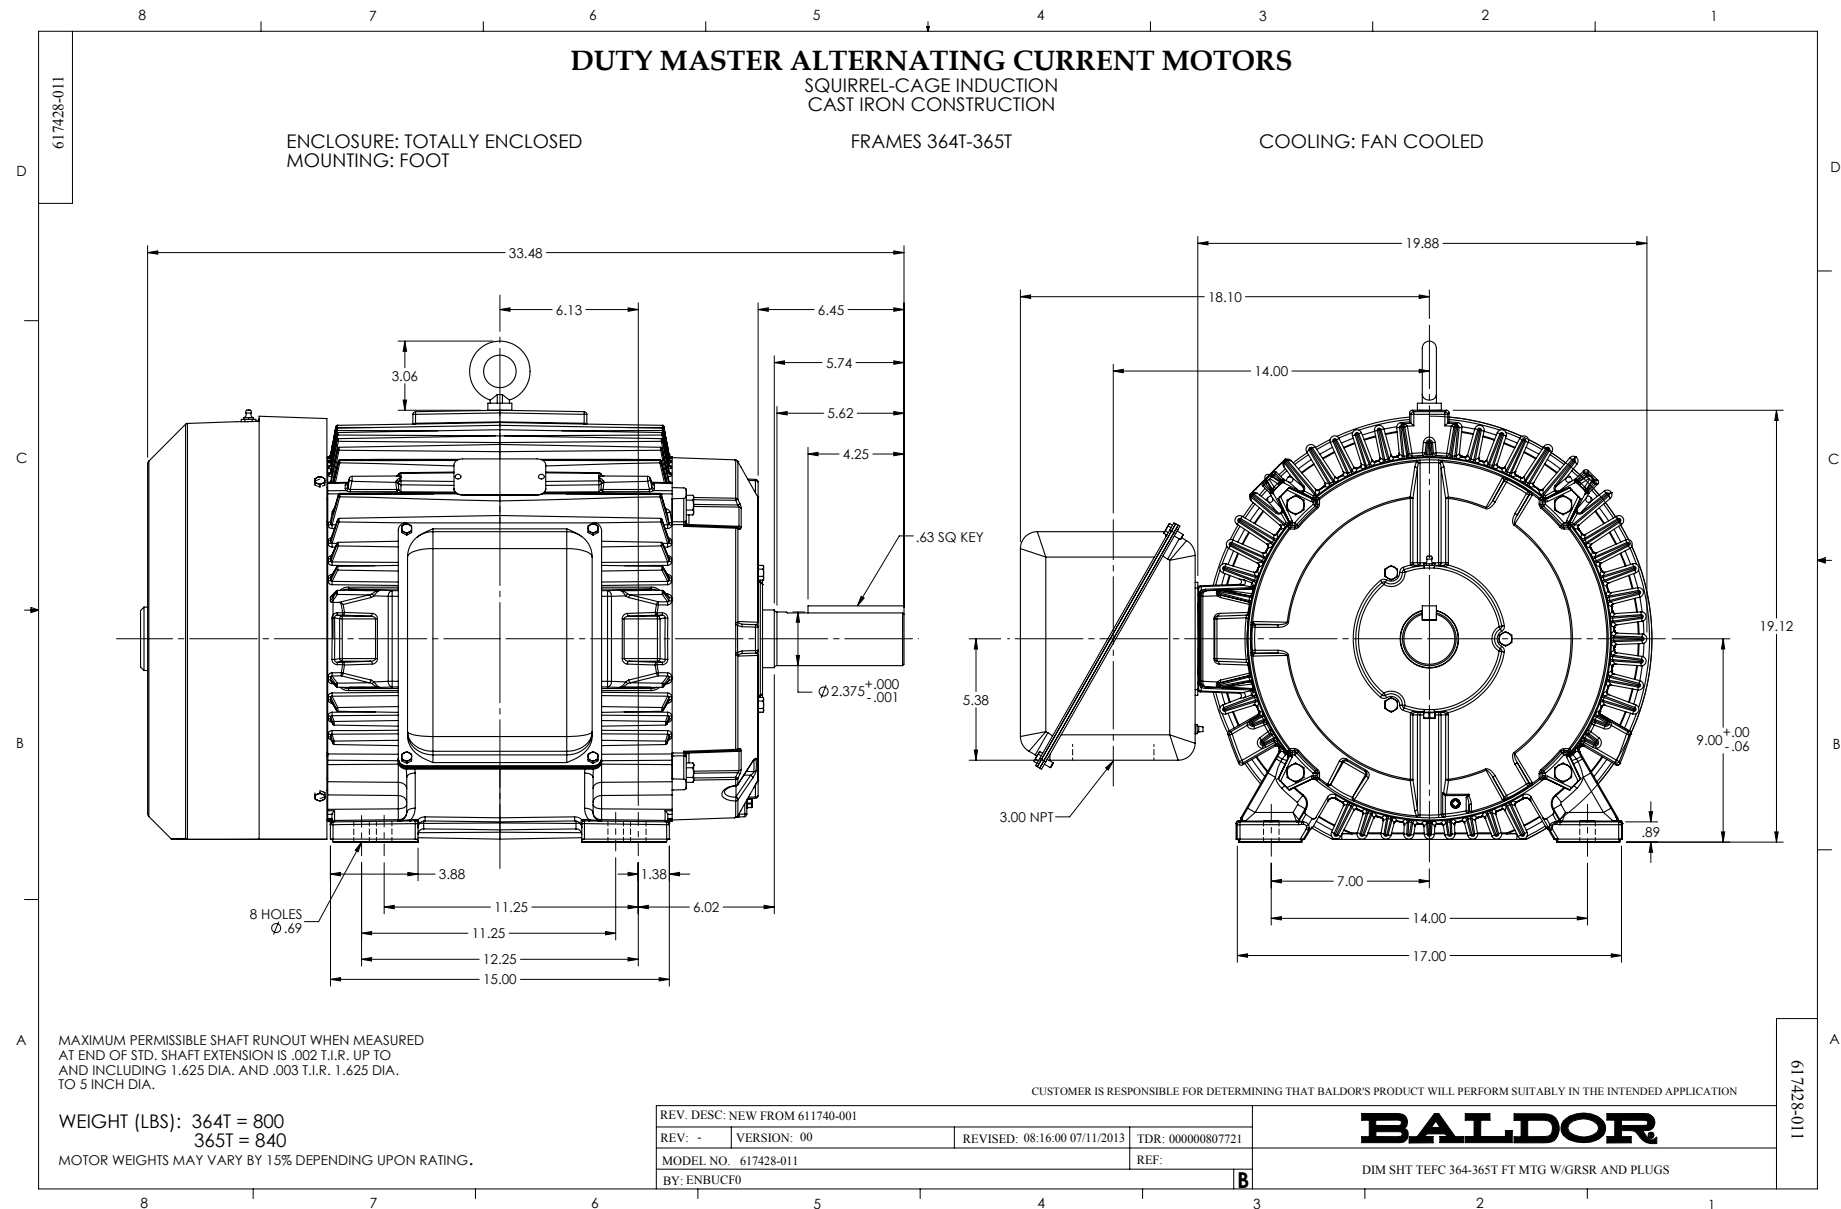

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

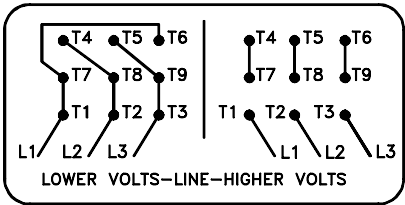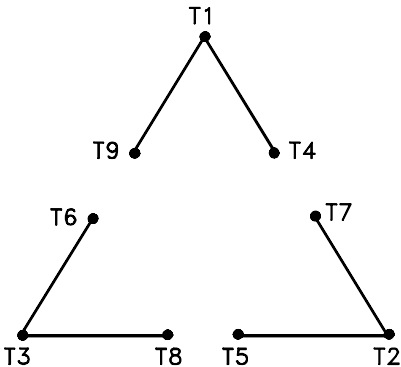

(N.P. 1575-B)

416820-002

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\661		REVISED: 10: 47: 51 04/30/2010
MTL: -		BY: RAGRA

BALDOR	
CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED	
SH 1 of 1	

Marketing maintained PDF of MN408:

<http://www.baldor.com/support/Literature/Load.ashx/MN408?ManNumber=MN408>

Marketing maintained PDF of MN416:

<http://www.baldor.com/support/Literature/Load.ashx/MN416?ManNumber=MN416>